



FEATURES:

- Fluorescent parabolic luminaire with direct lighting distribution.
- Lamp source: T5 or T8 Fluorescent.
- The high efficiency 32 Cell double parabolic louver provides excellent lighting distributions.
- The louver is manufactured from pre-anodized aluminum and grounded by 14AWG wire.
- Suitable for recessed, suspended or surface mounted installations.
- Housing is made from 18Ga rolled steel.
- Has a proven record in office, commercial and retail applications.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


SPECIFICATION:

1x4 EDM14

LAMPS	VOLTAGE	BALLAST	FINISH	LOUVER
2X25W T8	120V	ST - Standard	RS - Recessed	AL - Aluminum
2X32W T8	277V	IS - Instant Start	SF - Surface	WH - White
2X25W T5	347V	RS -Rapid Start	DR - Drywall	
2X28W T5		HO - High Output	AC - Aircraft	
2X49W T5		DM - Dimming		
2X54W T5		DL - DALI		

DIMENSIONS:

	RECESSED	SURFACE
Length:	48 1/4"	48 3/8"
Width:	11 3/4"	12 5/8"
Depth:	4"	4"

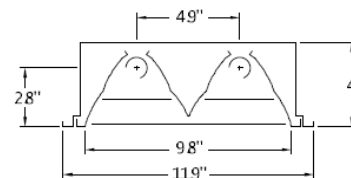

OPTIONS:

SURFACE



Project:

Type:

Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302
 www.edisonlighting.ca info@edisonlighting.ca