

FEATURES:

- ✓ Architectural luminaire with direct or indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED TRIANGLE+ — — — — — — — — —

Enter the order code into the boxes above.

SIZE

- ☐ 2x2x2 Feet
- ☐ 3x3x3 Feet
- ☐ 4x4x4 Feet
- ☐ *

*Specify required length.
**Custom angles are available.

SOURCE

- ☐ 25WLED
- ☐ 50WLED
- ☐ 75WLED*

* Available for 3 & 4 Feet.

RADIANCE

- ☐ DD - Direct (100%Down)
- ☐ ID - Indirect (100%Up)**
- ☐ IL - In Lite
- ☐ OL - Out Lite

*Light Distribution.
**Suspended Configuration only.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - Standard
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ *

* Please specify dimming method.

MOUNTING

- ☐ S4-Suspension 4Feet
- ☐ S6-Suspension 6Feet
- ☐ S Feet*
- ☐ WM - Wall Mount
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless

*Please specify required Length.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black
- ☐ WH - White
- ☐ CF - Custom

CCT

- ☐ 30K/90CRI - 3000Kelvin
- ☐ 35K/90CRI - 3500Kelvin
- ☐ 40K/90CRI - 4000Kelvin
- ☐ TW - Tunable White** (2700K-6500K)

*Other options are available.
**Available with Dali controls.

OPTIONS

- ☐ No Options*
- ☐ DS-Daylight Sensor
- ☐ DC - Dual Circuit**
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

*Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm




Declare.

Project:

Type:

SIZE:

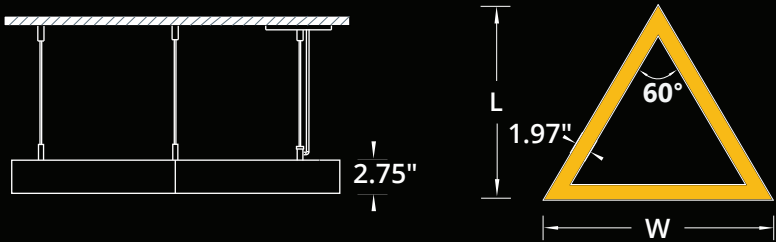

Size	Length x Width
2x2x2 Feet	24.13 x 27.59 Inch
3x3x3 Feet	33.65 x 38.86 Inch
4x4x4 Feet	44.70 x 51.61 Inch

RADIANCE:


DIRECT DISTRIBUTION




INDIRECT DISTRIBUTION




MOUNTING:

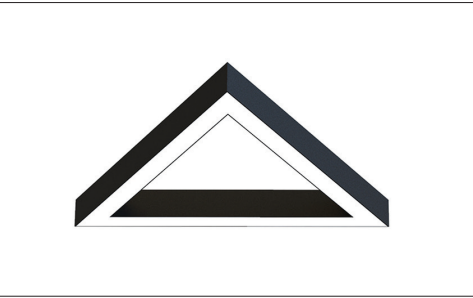


SURFACE MOUNT

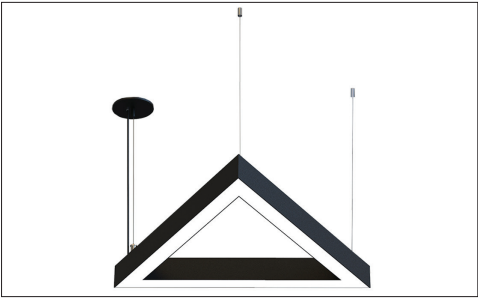


SUSPENDED

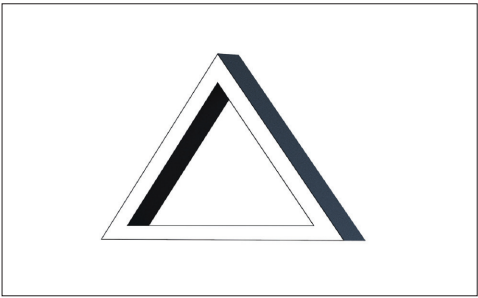


WALL MOUNT

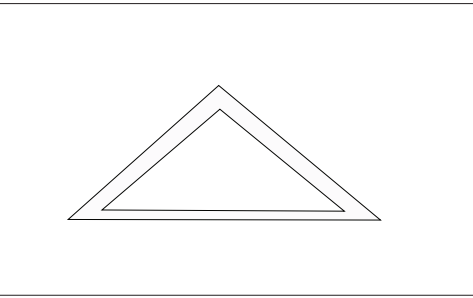

RECESSED TRIMLESS

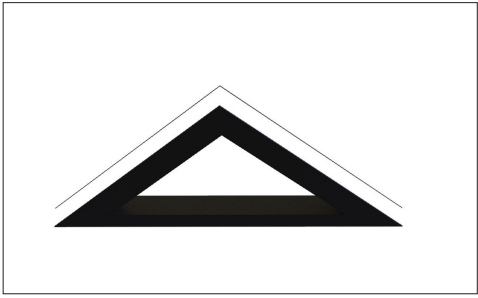

OUT-LITE

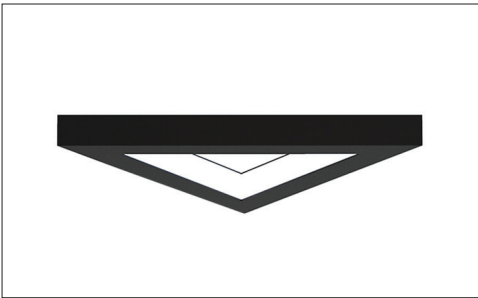

IN-LITE