

**FEATURES:**

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum sides with a laser cut metal top enclosure. Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**
**SPECIFICATION:**


Enter the Product Code into the boxes above.

**SIZE**
 3 ft

**SOURCE**

- 20 W
- 30 W
- 40 W

**RADIANCE**
 DD - Direct

**VOLTAGE**

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.

**DRIVER**

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- 

Specify dimming protocol.

**MOUNTING**

- S6B - 6 ft Canopy BK<sup>1</sup>
- S6W - 6 ft Canopy WH<sup>1</sup>
- S  ft
- SF - Surface Mount

1. Canopy match the Cord color.  
Specify Suspension length.

**LENS**
 OP - Opal

**FINISH**

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>
- CF/RAL

1. RAL 9005  
2. RAL 9003  
Specify required RAL number.

**CCT**

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

**OPTIONS**

- No Options<sup>1</sup>
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

1. Leave empty.

**LUMEN OUTPUT:**

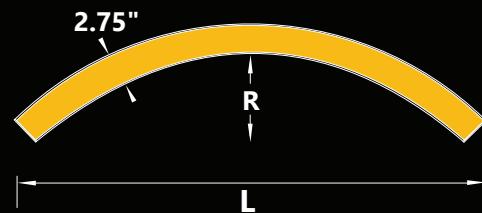
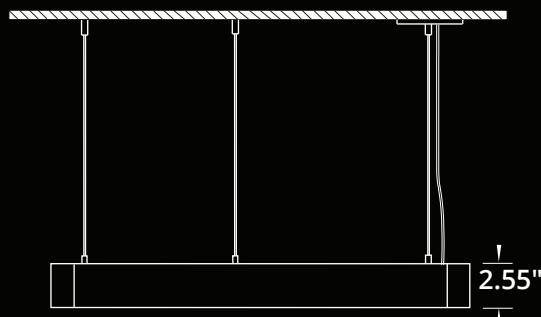

Watts	30K	35K	40K
20 W	2070 lm	2125 lm	2180 lm
30 W	3065 lm	3150 lm	3235 lm
40 W	4086 lm	4200 lm	4313 lm


**Project:**
**Type:**

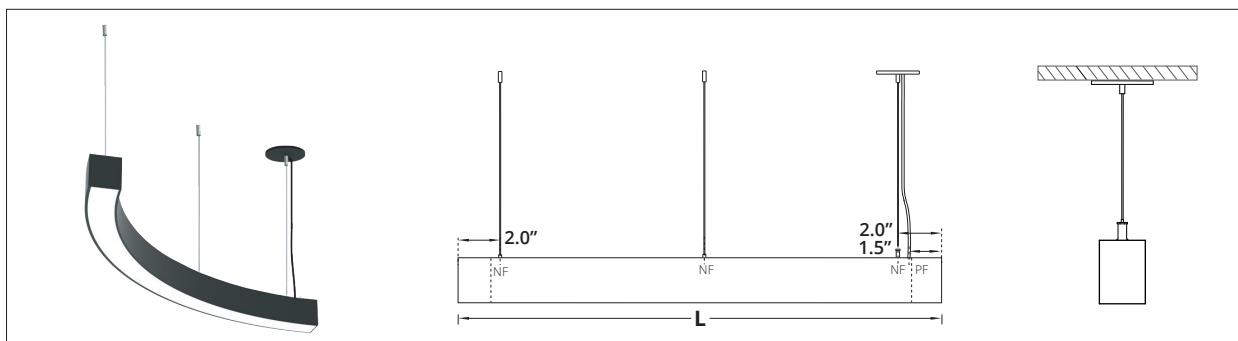
905-830-0339 / 1-800-667-9281

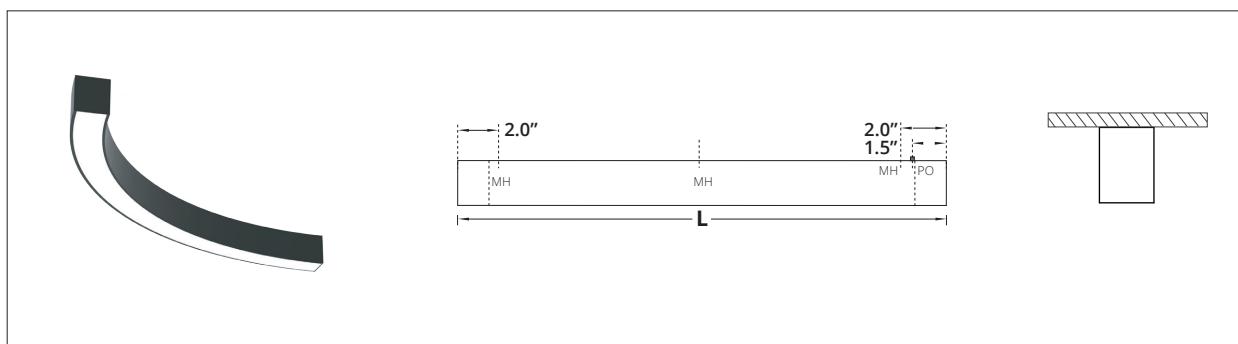
info@edisonlighting.ca

www.edisonlighting.ca

**SIZE:**

**RADIANCE:**


<b>Radius</b>	30.00 Inch
<b>Length - L</b>	40.00 Inch


**SUSPENDED**

 PF - Power Feed  
 NF - Non Power Feed

**SURFACE MOUNT**

 PO - Power Opening  
 MH - Mounting Hole