



## FEATURES:

- ✓ Architectural luminaire with direct-indirect distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED ORBIT+**

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

### SIZE

- ☐ 2 ft  
☐ 3 ft  
☐ 4 ft  
☐

Specify required size.

### SOURCE

- ☐ 25 W  
☐ 50 W  
☐ 75 W<sup>1</sup>

1. Available for 4 ft.  
 2. Other Wattages are available.

### RADIANCE

- ☐ IL - Inner Lit<sup>1</sup>  
☐ OL - Outer Lit<sup>2</sup>

1. 100% Inward  
 2. 100% Outward

### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V<sup>1</sup>

1. Verify availability.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DL2 - 0-10V Dim (TW)  
☐ DLA - 0-10V Dim (Aux)  
☐ DA4 - DALI D4i  
☐ CV - Constant Voltage (RGBW)  
☐

Specify dimming protocol.

### MOUNTING

- ☐ C4-Canopy 4 ft<sup>1</sup>  
☐ C6-Canopy 6 ft<sup>1</sup>  
☐ C  ft<sup>2</sup>  
☐ D4-Drop 4 ft  
☐ D6-Drop 6 ft  
☐ D  ft<sup>2</sup>  
☐ S4-Suspension 4 ft  
☐ S6-Suspension 6 ft  
☐ S  ft<sup>2</sup>  
☐ SF - Surface Mount

1. Canopy & Drop Suspensions are only available in standard sizes.  
 2. Please specify required length.

### LENS

- ☐ OP - Opal

### FINISH

- ☐ BK - Black<sup>1</sup>  
☐ WH - White<sup>2</sup>  
☐ CF/RAL

1. RAL 9005  
 2. RAL 9016  
 Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐ RGBW<sup>1</sup>  
☐ TW - Tunable White (27K-65K)<sup>2</sup>  
☐

1. Available with DMX or CB.  
 2. Available with DL2, DA4 or CB.  
 Specify required CCT.

### OPTIONS

- ☐ No Options<sup>1</sup>  
☐ EC - Emergency Circuit  
☐ CB - Casambi Bluetooth(TW, RGBW)  
☐ DMX - DMX (RGBW)  
☐ AWN - Athena Wireless Node (DLA)

1. Leave empty.

## LUMEN OUTPUT:


Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6610 lm	6750 lm	6890 lm



Declare.



Project:

Type:

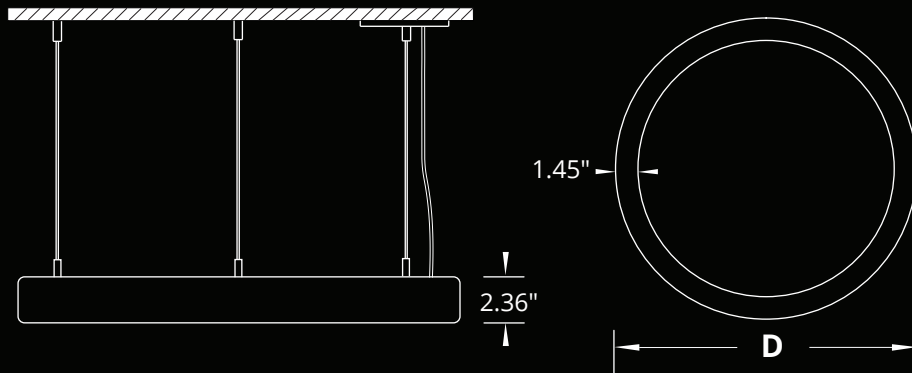


Diameter		
Size	Outer Lit	Inner Lit
2 ft	27.952 in	25.196 in
3 ft	34.250 in	37.795 in
4 ft	46.456 in	44.094 in

## RADIANCE:

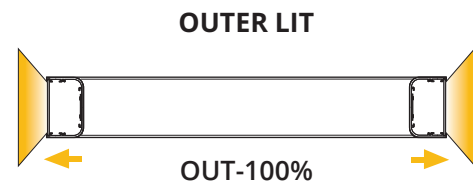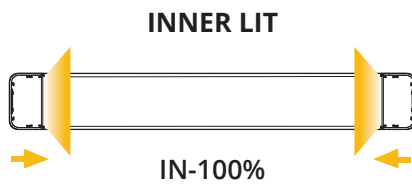


## MOUNTING:

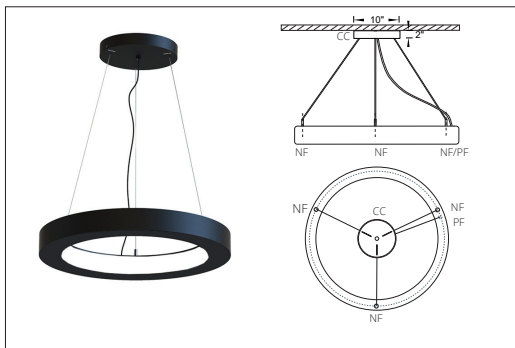


### SUSPENDED - CEILING CANOPY

CC - Ceiling Canopy - Available for 2-3-4 ft sizes  
 PF - Power Feed  
 NF - Non Power Feed

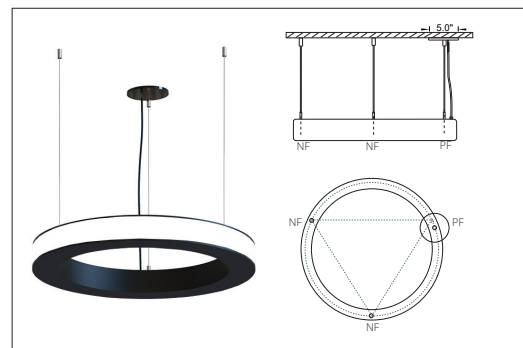


### SUSPENDED - STRAIGHT WIRE <sup>1</sup>

PF - Power Feed  
 NF - Non Power Feed  
 1. Remote Driver.

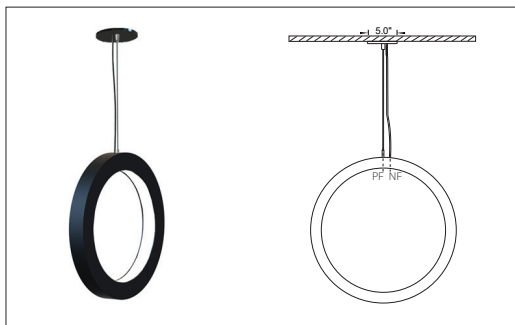

### DROP SUSPENSION <sup>1</sup>

DS - Drop Suspension - Available for 2-3-4 ft sizes  
 PF - Power Feed  
 NF - Non Power Feed  
 1. Remote Driver.

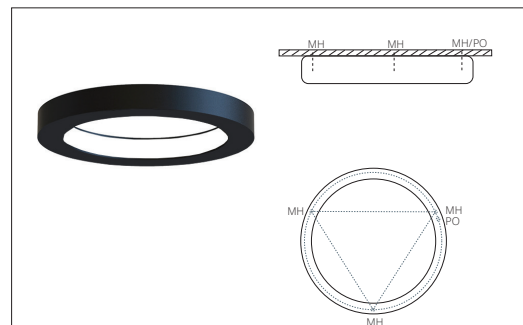

### SURFACE MOUNT <sup>1</sup>

PO - Power Opening  
 MH - Mounting Hole  
 1. Remote Driver.