

## FEATURES:

- ✓ Architectural curved system with direct lighting distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens or by optional prismatic optic.
- ✓ Sleek body of the luminaire is made from aluminum profile curved to desired shape.
- ✓ Suitable for non-insulated recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED boards are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards. **reinventlight**

## SPECIFICATION:

**ED CURVES+**  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### SHAPE

- CR - Curve
- OV - Oval
- SQ - Square
- RC - Rectangle
- CS - Custom Shape

Specify Custom Shape.

### SIZE

- \_\_\_\_\_ Linear ft

Provide drawing (pdf or dwg).

### SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

### RADIANCE

- DD - Direct

### VOLTAGE

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.

### DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- 

Specify dimming protocol.

### MOUNTING

- RS - Recessed

### LENS

- OP - Opal

### FINISH

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>
- CF/RAL

1. RAL 9005  
2. RAL 9003  
Specify required RAL number.

### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

1. Available with DMX or CB.

2. Available with DL2, DA4 or CB.

Specify required CCT.

### OPTIONS

- No Options<sup>1</sup>
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

1. Leave empty.

## LUMEN OUTPUT W/ft:

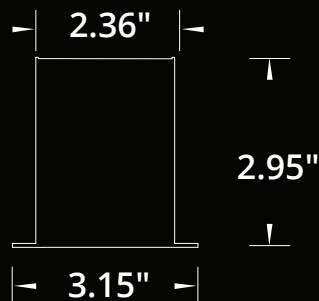
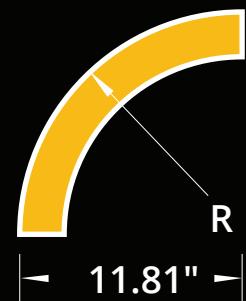
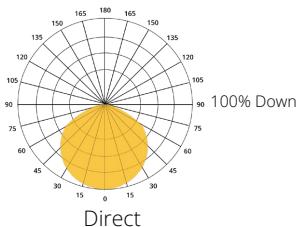
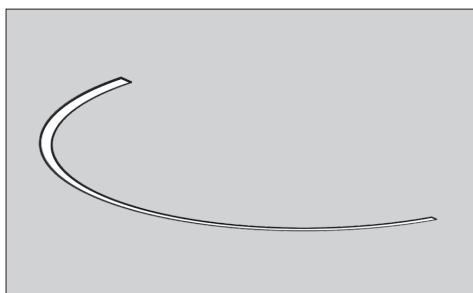
Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



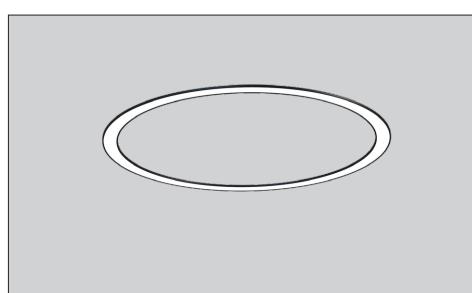
Declare.

Project:

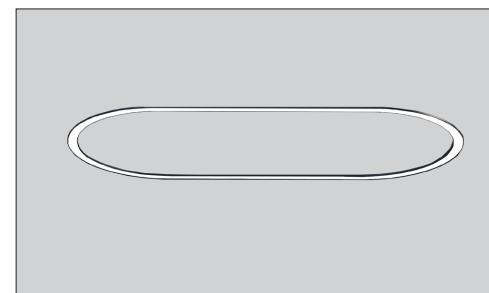
Type:

**SIZE:**

**MINIMUM RADIUS:**

**RADIANCE:**

**SHAPES:**


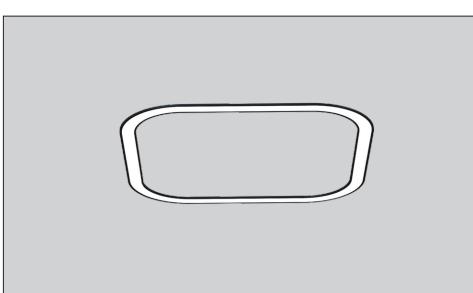
CURVE



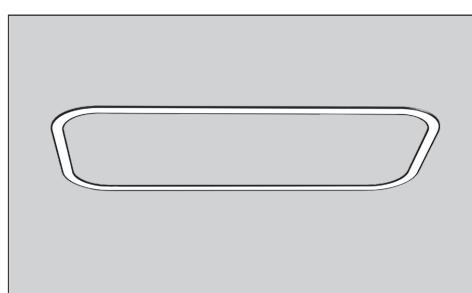
RING



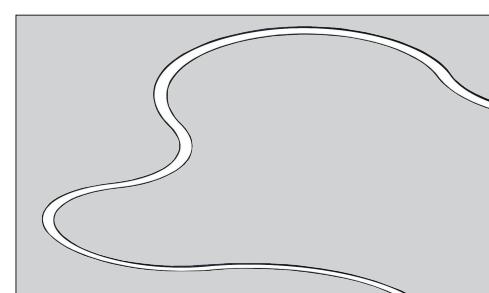
OVAL



SQUARE



RECTANGLE



CUSTOM SHAPE