


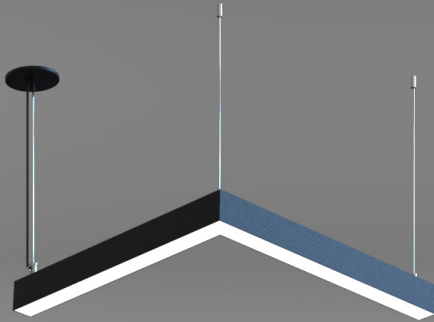

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VERTEX+

Enter the Product Code into the boxes above.

ANGLE

- ☐ 60°
☐ 90°
☐ 120°

SIZE

_____ ft
 2-8 ft Arm length.

SOURCE

- ☐ 5 W/ft
☐ 7 W/ft
☐ 10 W/ft

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐
 Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK¹
☐ S6W - 6ft Cord WH¹
☐ S ft²
☐ SF - Surface Mount
☐ RT - Recessed Trimless

1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
 1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐

1. Available with DMX or CB.
 2. Available with DL2, DA4 or CB.
 Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ JD - JDRF Autonomy Sensor (DA4)
☐ DOS - Daylight & Occupancy Sensor (DLA)
☐ AWN - Athena Wireless Node (DLA)
 1. Leave empty.

LUMEN OUTPUT W/ft:



Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Project:

Type:

SIZE:

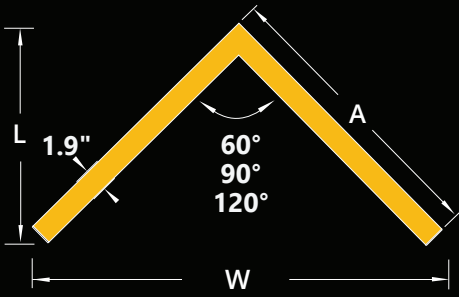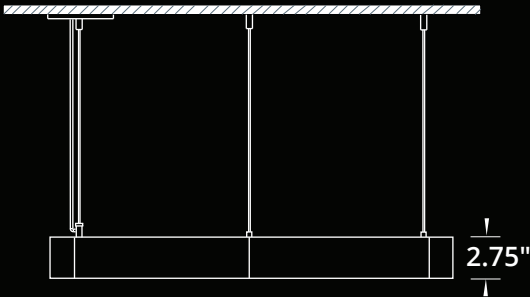


RADIANCE:




Angle	60°		90°		120°	
Size	A	L x W	A	L x W	A	L x W
2 ft	26.22	23.60 x 26.10	25.49	23.23 x 43.68	25.07	14.19 x 43.25
3 ft	37.22	33.12 x 37.10	36.99	27.12 x 51.46	36.07	19.69 x 62.30
4 ft	49.97	44.16 x 49.85	49.24	36.14 x 69.49	48.83	26.06 x 84.38
5 ft	60.97	53.68 x 60.85	60.24	43.91 x 85.04	59.83	31.56 x 103.44
6 ft	73.72	64.73 x 73.60	72.94	52.93 x 103.10	72.57	37.94 x 125.52
7 ft	84.72	74.25 x 84.60	83.99	60.71 x 118.63	83.57	43.44 x 144.57
8 ft	97.47	85.30 x 97.35	96.74	69.72 x 136.66	96.33	49.81 x 166.65

A - Arm Length
 L - Total Length
 W - Total Width
 All dimensions are in Inches.


MOUNTING:

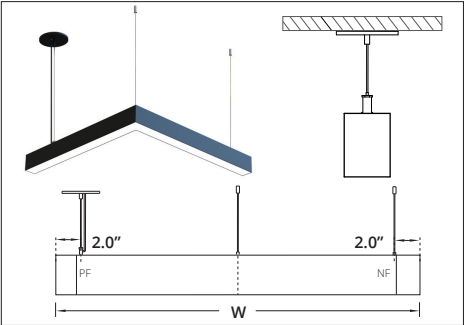

SUSPENDED
 PF - Power Feed
 NF - Non Power Feed

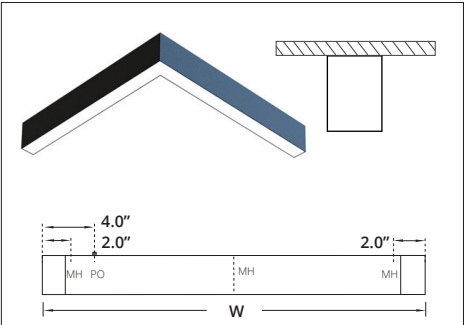

SURFACE MOUNT
 PO - Power Opening
 MH - Mounting Hole

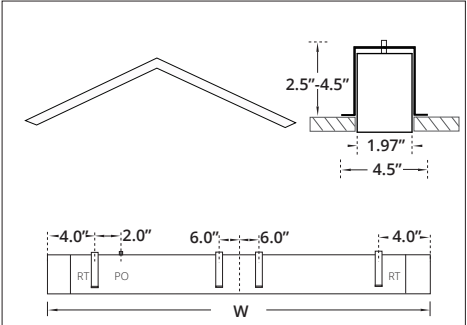

RECESSED TRIMLESS
 PO - Power Opening
 RT - Recessed Trimless Bracket
 1. Cutout Dimensions = Arm Lengths x Width of Extrusion.