

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:

**ED HEXAGON+**  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

### SIZE

- ☐  Ft\*
- \*2-9 Ft.  
\*\*Custom Sizes are available.

### SOURCE

- ☐ 5 W/Ft  
☐ 7 W/Ft  
☐ 10 W/Ft

### RADIANCE

- ☐ DD - Direct (100%Down)  
 \*Light Distribution.

### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V\*
- \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dimming (1%)  
☐ DLO - 0-10V Dimming (to Off)  
☐ DL2 - 0-10V Dimming (2 Channels)  
☐ DA4 - DALI D4i  
☐ DMX - DMX RGBW  
☐  \*
- \*Specify dimming protocol.

### MOUNTING

- ☐ S6B - 6Ft Cord BK\*
- ☐ S6W - 6Ft Cord WH\*
- ☐ S  Ft\*\*
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless
- \*Canopy will match the Cord color.  
 \*\*Specify Suspension length and color.

### LENS

- ☐ OP - Opal  
☐ PR - Prismatic

### FINISH

- ☐ BK - Black\*
- ☐ WH - White\*\*
- ☐ CF/RAL  \*\*\*
- \*RAL 9005  
 \*\*RAL 9016  
 \*\*\*Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW
- ☐ TW - Tunable White\*  
 (2700K-6500K)
- ☐  \*\*
- \*Available with 0-10V, Dali or Bluetooth controls.  
 \*\*Specify required CCT.

### OPTIONS

- ☐ No Options\*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐  \*\*
- \*Leave empty.  
 \*\*Specify required option.

## LUMEN OUTPUT W/Ft:


| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 5 W   | 515 lm  | 525 lm  | 535 lm  |
| 7 W   | 720 lm  | 735 lm  | 750 lm  |
| 10 W  | 1030 lm | 1050 lm | 1080 lm |



Project:

Type:


SIZE:

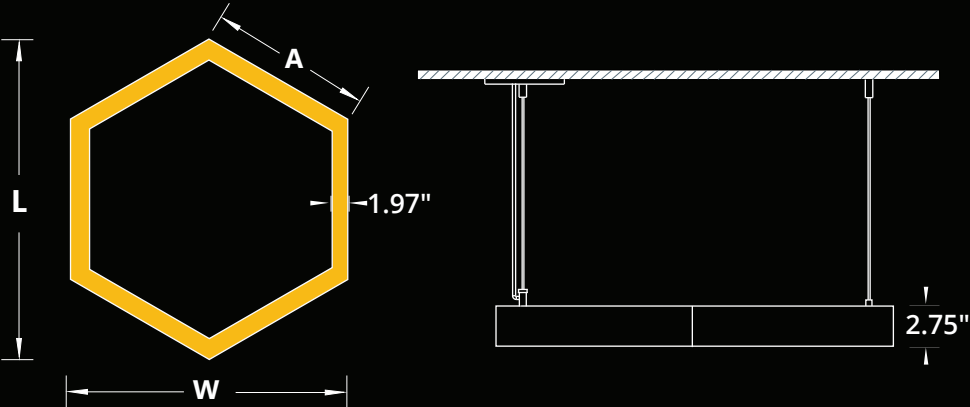


| Size | Arm - A | L x W          |
|------|---------|----------------|
| 2 Ft | 1.0 Ft  | 12.84          |
| 3 Ft | 1.5 Ft  | 18.34          |
| 4 Ft | 2.0 Ft  | 25.60          |
| 5 Ft | 2.5 Ft  | 31.08          |
| 6 Ft | 3.0 Ft  | 35.60          |
| 7 Ft | 3.5 Ft  | 42.08          |
| 8 Ft | 4.0 Ft  | 49.34          |
| 9 Ft | 4.5 Ft  | 54.84          |
|      |         | 109.67 x 94.98 |

A - Arm Length  
L - Total Length  
W - Total Width  
\*All dimensions are in Inches.


RADIANCE:




MOUNTING:

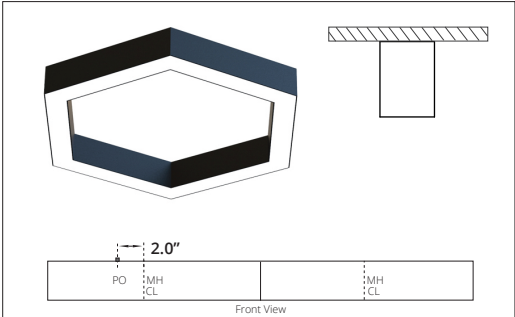


**SURFACE MOUNT**  
MH - Mounting Hole  
PO - Power Opening  
CL - Center of Arm length

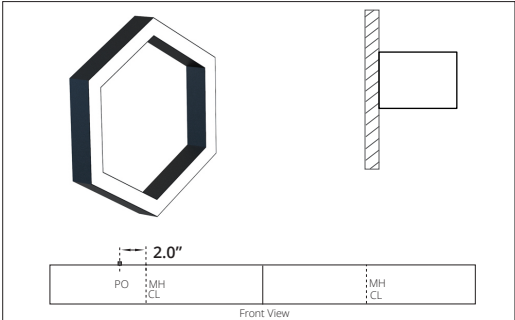

**WALL FLUSH**  
MH - Mounting Hole  
PO - Power Opening

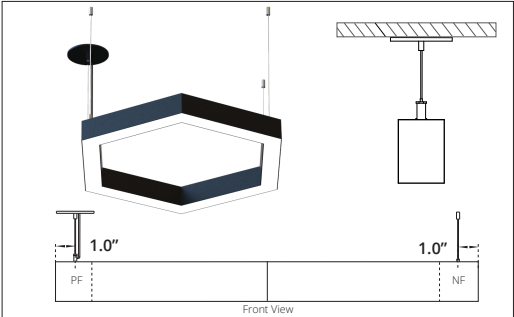

**SUSPENDED**  
PF - Power Feed  
NF - Non Power Feed

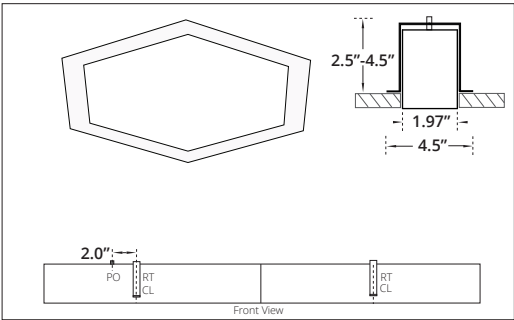

**RECESSED TRIMLESS**  
RT - Recessed Trimless Bracket  
PO - Power Opening  
CL - Center of Arm length  
\*Cutout Dimensions = Total Length x Width of Extrusion.