

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of luminaire is made from curved aluminum profile.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver enclosure can be surface mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- ✓ LED tape is rated for 60,000 hrs. L80 with 90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED ORBIT+**  —  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

### TYPE

- ☐ S - Shape

### SIZE

- ☐ 3 ft  
☐ 4 ft  
☐ 6 ft  
☐ 8 ft

### SOURCE

- ☐ 5 W/ft  
☐ 7 W/ft  
☐ 10 W/ft

### RADIANCE

- ☐ DD - Direct <sup>1</sup>  
☐ SD - Side Distribution <sup>2</sup>  
1. 100% Downward  
2. 100% Sideways

### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V <sup>1</sup>  
1. Verify availability.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DL2 - 0-10V Dim (TW)  
☐ DLA - 0-10V Dim (Aux)  
☐ DA4 - DALI D4i  
☐ CV - Constant Voltage (RGBW)  
☐   
Specify dimming protocol.

### MOUNTING

- ☐ S6B - 6 ft Cord BK <sup>1</sup>  
☐ S6W - 6 ft Cord WH <sup>1</sup>  
☐ S  ft <sup>2</sup>  
1. Canopy will match the Cord color.  
2. Specify Suspension length and color.

### LENS

- ☐ OP - Opal

### FINISH

- ☐ BK - Black <sup>1</sup>  
☐ WH - White <sup>2</sup>  
☐ CF/RAL   
1. RAL 9005  
2. RAL 9003  
Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐ RGBW <sup>1</sup>  
☐ TW - Tunable White (27K-65K) <sup>2</sup>  
☐   
1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

- ☐ No Options <sup>1</sup>  
☐ EC - Emergency Circuit  
☐ CB - Casambi Bluetooth(TW, RGBW)  
☐ DMX - DMX (RGBW)  
☐ AWN - Athena Wireless Node (DLA)  
1. Leave empty.

## LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	440 lm	450 lm	460 lm
7 W	618 lm	630 lm	642 lm
10 W	882 lm	900 lm	918 lm




Declare.

Project:



Type:

PROFILE:

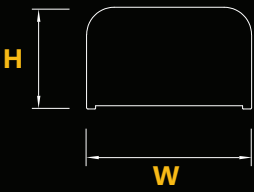


DIMENSIONS:


Profile	Size	Length	Height - H1	Radius - R
Width - W	3 ft	37.03 in	7.87 in	15 in
2.36 in	4 ft	46.75 in	6.00 in	30 in
Height - H	6 ft	73.00 in	7.87 in	15 in
1.45 in	8 ft	92.75 in	6.00 in	30 in

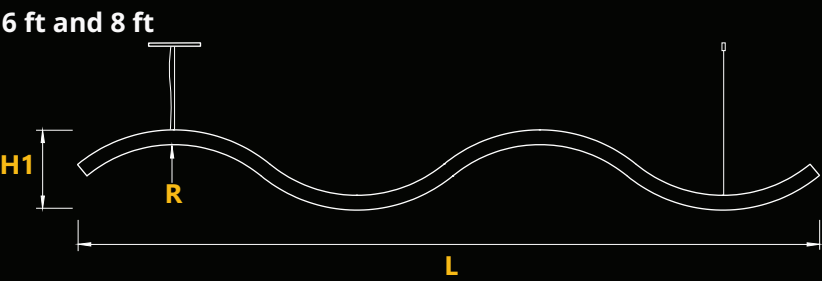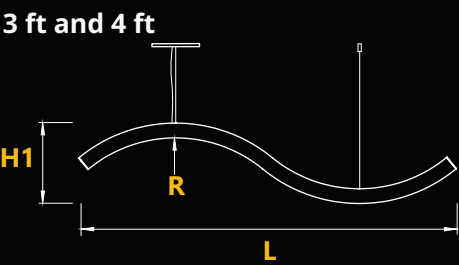


SIZES AND CONFIGURATIONS:

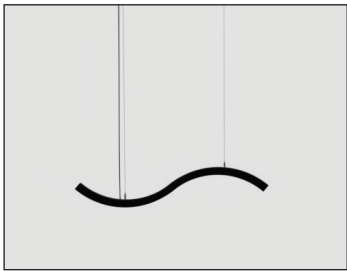


3 ft




4 ft




6 ft




8 ft

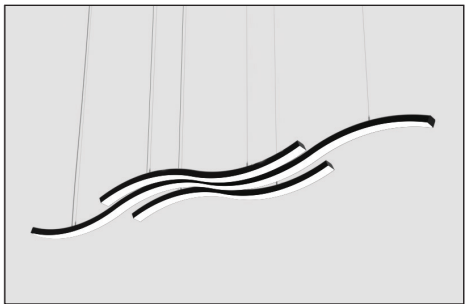

4 ft and 8 ft - Combination

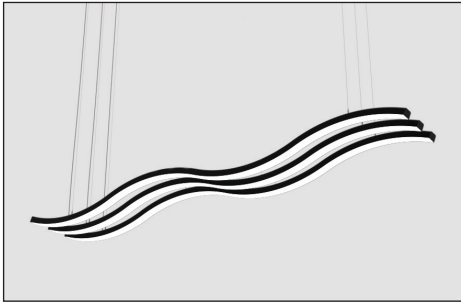

8 ft - Combination

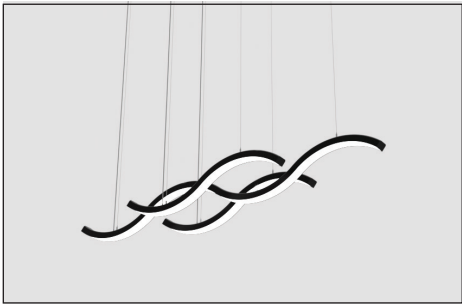

3 ft and 6 ft - Combination