


FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed or wall mounted installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

SIZE

____ ft
1-8 ft
Continuous Run
(0.5 ft Increments)

SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

RADIANCE

- DD - Direct
- ID - Indirect only
- UD - Uneven¹

1. Available in sizes 4 ft and up.

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
-

Specify dimming protocol.

MOUNTING

- S6B - 6 ft Cord BK¹
- S6W - 6 ft Cord WH¹
- S ft²
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount
- RT - Recessed Trimless

1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- OP - Opal
- AS - Asymmetric
- PR - Prismatic

FINISH

- BK - Black¹
- WH - White²
- CF/RAL

1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- No Options¹
- EM - Emergency Battery Pack²
- DC - Dual Circuit³
- EC - Emergency Circuit
- DR - Damp Rated
- CB - Casambi Bluetooth(TW, RGBW)⁴
- DMX - DMX (RGBW)
- JD - JDRF Autonomy Sensor (DA4)⁴
- DOS - Daylight & Occupancy Sensor (DLA)⁴
- AWN - Athena Wireless Node (DLA)⁴

1. Leave empty.
2. Battery Pack per 4 ft section.
3. Control Downlight/Uplight separately.
4. Available in sizes 4 ft and up.

LUMEN OUTPUT W/ft:

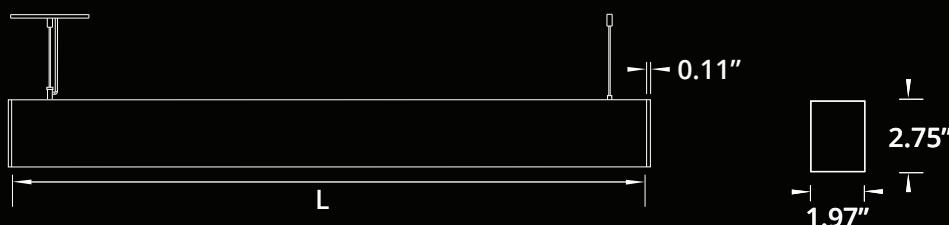
Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Declare.

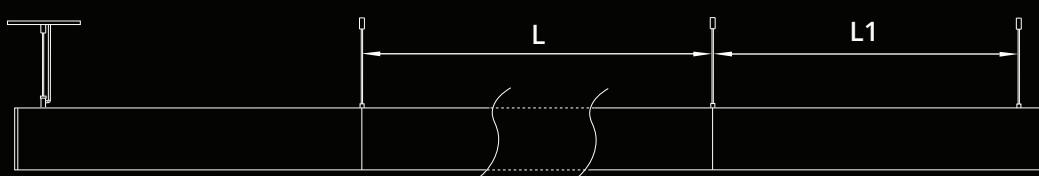
Project:

Type:




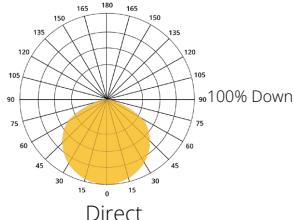
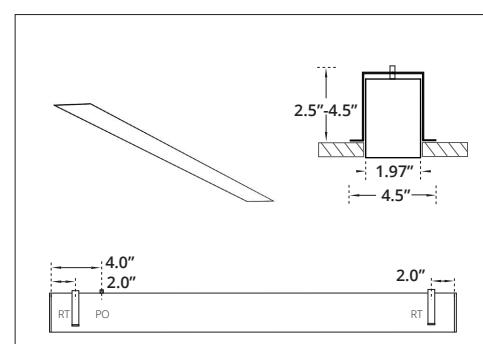
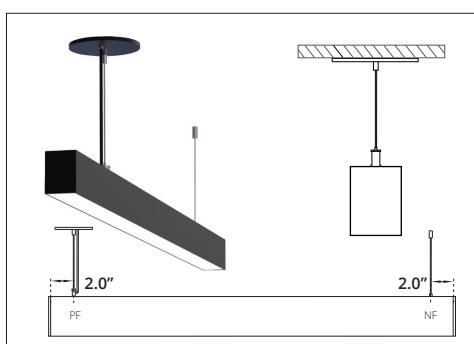
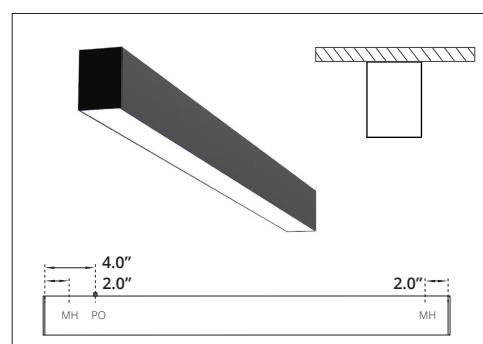
SIZE:


Size	L
1 ft	11.50 in
2 ft	24.25 in
3 ft	35.25 in
4 ft	48.00 in
5 ft	59.00 in
6 ft	71.75 in
7 ft	82.75 in
8 ft	95.50 in

L - Linear extrusion length only.
Total length with Endcaps = L + (2 x 0.11)

CONTINUOUS RUN:


Continuous Run suspension dimensions
L1 = L - 2.0 in

RADIANCE:

MOUNTING:

SURFACE MOUNT

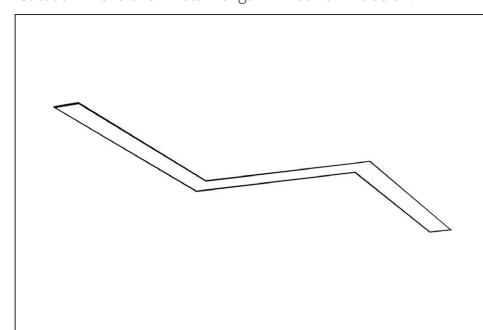
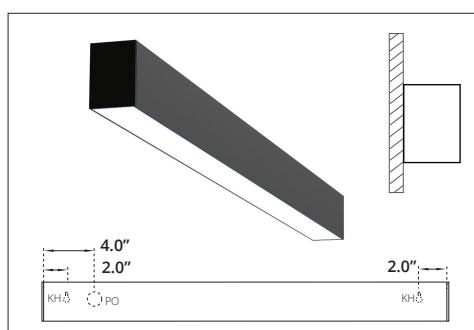
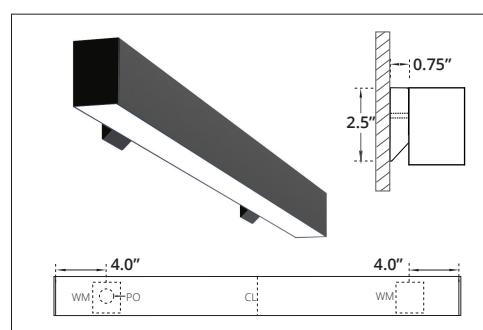
MH - Mounting Hole
PO - Power Opening

SUSPENDED

PF - Power Feed
NF - Non Power Feed

RECESSED TRIMLESS

RT - Recessed Trimless Bracket
PO - Power Opening
Cutout Dimensions = Total Length x Width of Extrusion.


WALL MOUNT

PO - Power Opening
WM - Wall Mount Bracket
1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

WALL FLUSH

KH - Key Hole
PO - Power Opening

VARIABLE ANGLE

60°, 90°, 120°, 135° or Custom.