


FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:
Sonic RING+

 TYPE - HEIGHT - SIZE - SOURCE - RADIANCE - VOLTAGE - DRIVER - MOUNTING - LENS - RING FINISH - CCT - ACOUSTIC

Enter the Product Code into the boxes above.

TYPE

- PV - Flush V-Cut
- FR - Flush Regular
- RA - Recessed Angle¹
-

 1. Available in 12 in height and 2 ft size only.
 Specify custom type.

HEIGHT

- 12 in
- 16 in
- 24 in

SIZE

- 2 ft
- 3 ft
- 4 ft

SOURCE

- 25 W
- 50 W
- 75 W¹

1. Available for 4 ft.

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- CV - Constant Voltage (RGBW)
-

Specify dimming protocol.

MOUNTING

- S6W - 6 ft Cord BK¹
- S6B - 6 ft Cord WH¹
- S ft²

 1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- OP - Opal

FINISH

- BK - Black¹
- WH - White²

 1. RAL 9005
 2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

 1. Available with CV.
 2. Available with DL2.

Specify required CCT.

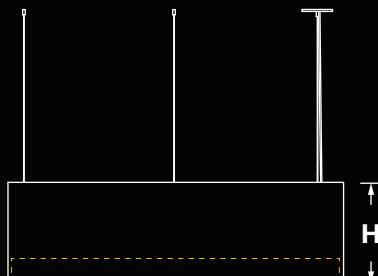

ACOUSTIC FINISH


Specify additional colour for Two-Tone, for example 11/04.

LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6615 lm	6750 lm	6885 lm


Project:
Type:

SIZE:

FR-FLUSH REGULAR


H - Height	D - Diameter
12 in = 11.75 in	2 ft 27.053 in
16 in = 15.75 in	3 ft 36.502 in
24 in = 23.75 in	4 ft 48.313 in

TYPE:

FV - FLUSH V-CUT

FR - FLUSH REGULAR

RA - RECESSED ANGLE
Available in 12 inch height and 2 feet size only .
FINISHES:

FV - TWO TONE
 04/11

FV - TWO TONE
 09/24

FV - TWO TONE
 04/25