

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted installations.
- ✓ LED Spot is rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED CUBIX+ X - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- 1 - Single
- 2 - Double
- 3 - Triple

SOURCE

- 5W LED
- 10W LED
- 15W LED

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DA4 - DALI D4i
-

Specify dimming protocol.

MOUNTING

- SF - Surface Mount

REFLECTOR

- WH - White
- BK - Black
- SL - Silver
- GL - Gold
- RG - Rose Gold

FINISH

- BK - Black¹
- WH - White²

1. RAL 9005
2. RAL 9003

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
-

Specify required CCT.

DIMENSIONS:

Unit	Length	Height	Width
Single	3.750 in	4.500 in	3.750 in
Double	7.375 in	4.500 in	3.750 in
Triple	10.937 in	4.500 in	3.750 in


LUMEN OUTPUT:

Watts	30K	35K	40K
10 W	930 lm	950 lm	970 lm
15 W	1395 lm	1425 lm	1450 lm



Project:

Type:

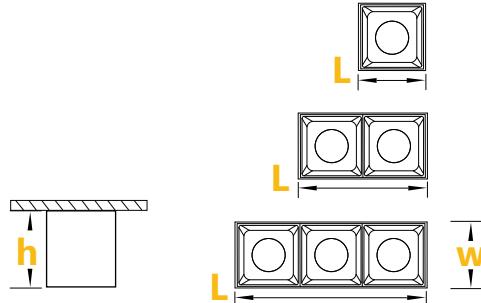

905-830-0339 / 1-800-667-9281

info@edisonlighting.ca

 www.edisonlighting.ca