
FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in black or white finish.
- ✓ Also available with custom colour options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:
Sonic Curve+

TYPE	HEIGHT	SIZE	SOURCE	RADIANC	VOLTAGE	DRIVER	MOUNTING	LENS	CURVE FINISH	CCT	ACOUSTIC
------	--------	------	--------	---------	---------	--------	----------	------	--------------	-----	----------

Enter the Product Code into the boxes above.

TYPE

- FV - Flush Vcut
- FR - Flush Regular

HEIGHT

- 12 in
- 16 in
- 24 in

SIZE

- 3 ft

SOURCE

- 20 W
- 30 W
- 40 W

RADIANCE

- DD - Direct

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DA4 - DALI D4i
-

Specify dimming protocol.

MOUNTING

- S6W - 6 ft Cord BK¹
- S6B - 6 ft Cord WH¹
- S ft²

 1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- OP - Opal

ED CURVE FINISH

- BK - Black¹
- WH - White²

 1. RAL 9005
 2. RAL 9016

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

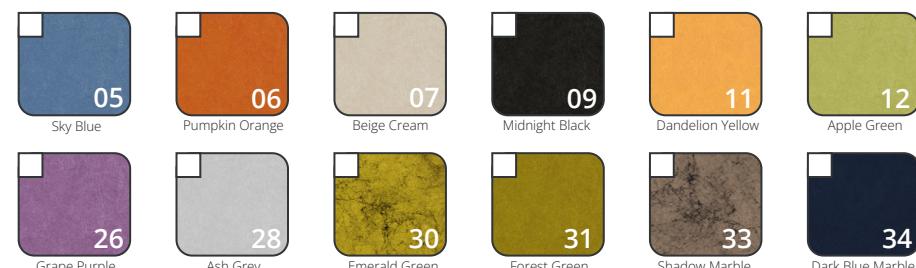
1. Available with DMX or CB.

2. Available with DL2, DA4 or CB.

Specify required CCT.

ACOUSTIC FINISH

Please specify finishes.


LUMEN OUTPUT:

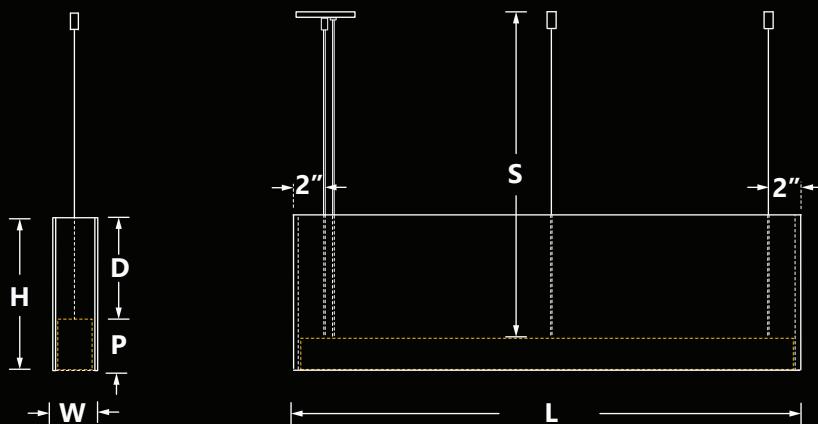
Watts	30K	35K	40K
20 W	2070 lm	2125 lm	2180 lm
30 W	3065 lm	3150 lm	3235 lm
40 W	4086 lm	4200 lm	4313 lm


Project:
Type:

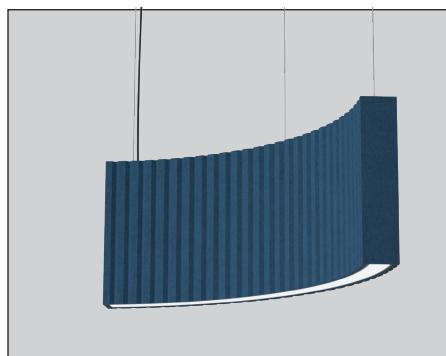
905-830-0339 / 1-800-667-9281

info@edisonlighting.ca

www.edisonlighting.ca

SIZE:


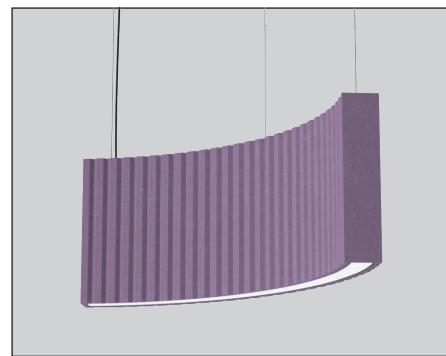
W - Width	P - Profile
3.875 in	3.15 in
H - Height	D - Depth
12 in = 11.75 in	8.60 in
16 in = 15.75 in	12.60 in
24 in = 23.75 in	20.60 in
R - Radius	L - Length
31.35 in	41.70 in
S - Suspension Length	

FLUSH VCUT-FINISHES:


#01



#04



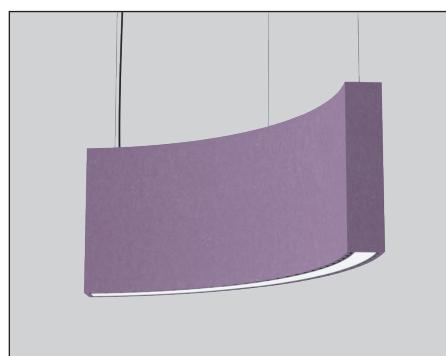
#26

FLUSH REGULAR-FINISHES:


#01



#04



#26