


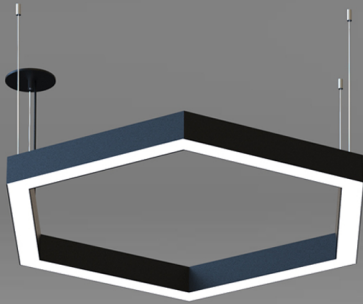

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED HEXAGON+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

- Feet*
- *2-9 Feet .
- **Custom Sizes are available.

SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

RADIANCE

- ☐ DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*
- *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2 Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ *
- *Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
- ☐ S6B - 6Ft Cord BK*
- ☐ S Feet**
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless
- *Canopy will match the Cord color.
- **Specify Suspension length and color.

LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF/RAL ***
- *RAL 9005
- **RAL 9016
- ***Specify required RAL number.

CCT

- ☐ 30K/90CRI - 3000 Kelvin
- ☐ 35K/90CRI - 3500 Kelvin
- ☐ 40K/90CRI - 4000 Kelvin
- ☐ RGBW
- ☐ TW - Tunable White* (2700K-6500K)
- ☐ **
- *Available with 0-10V, Dali or Bluetooth controls.
- **Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐ **
- *Leave empty.
- **Specify required option.

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Project:

Type:

SIZE:

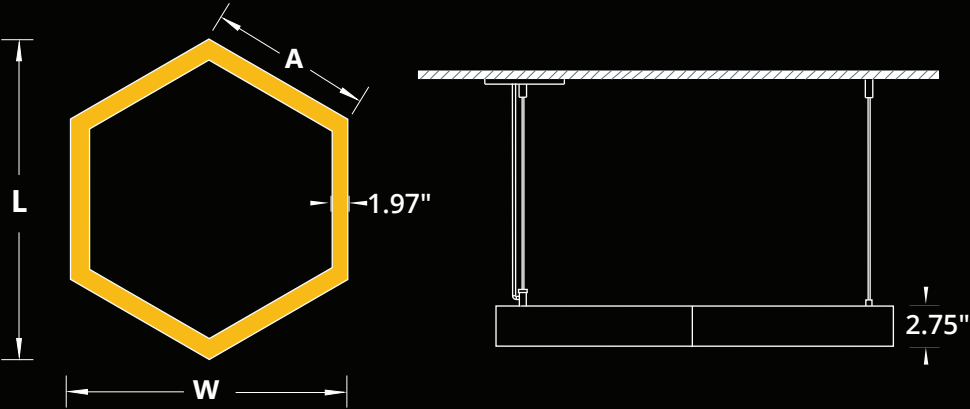


Size	Arm - A		L x W
2 FT	1.0 FT	12.84	25.67 x 22.23
3 FT	1.5 FT	18.34	36.67 x 31.76
4 FT	2.0 FT	25.60	51.17 x 31.76
5 FT	2.5 FT	31.08	62.17 x 53.84
6 FT	3.0 FT	35.60	73.17 x 63.37
7 FT	3.5 FT	42.08	84.17 x 72.90
8 FT	4.0 FT	49.34	98.67 x 85.45
9 FT	4.5 FT	54.84	109.67 x 94.98

A - Arm Length
 L - Total Length
 W - Total Width
 *All dimensions are in Inches.


RADIANCE:




MOUNTING:

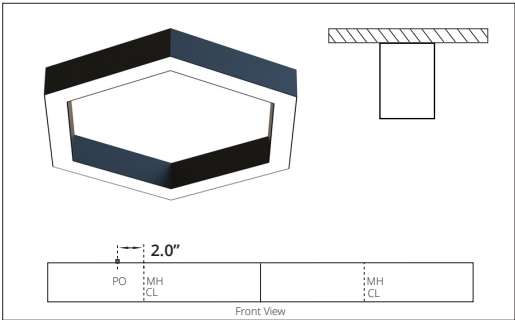


SURFACE MOUNT
 MH - Mounting Hole
 PO - Power Opening
 CL - Center of Arm length

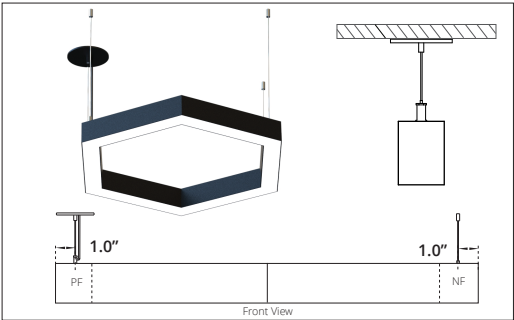

SUSPENDED
 PF - Power Feed
 NF - Non Power Feed

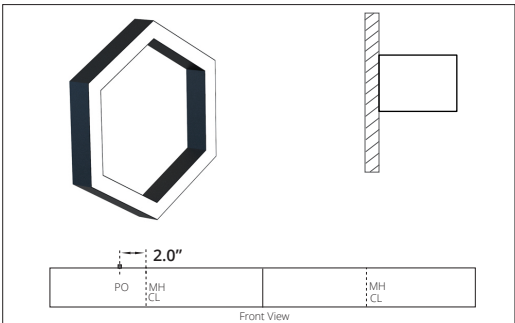

WALL FLUSH
 MH - Mounting Hole
 PO - Power Opening

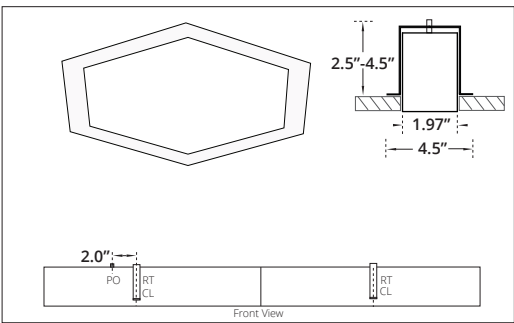

RECESSED TRIMLESS
 RT - Recessed Trimless Bracket
 PO - Power Opening
 CL - Center of Arm length
 *Cutout Dimensions = Total Length x Width of Extrusion.