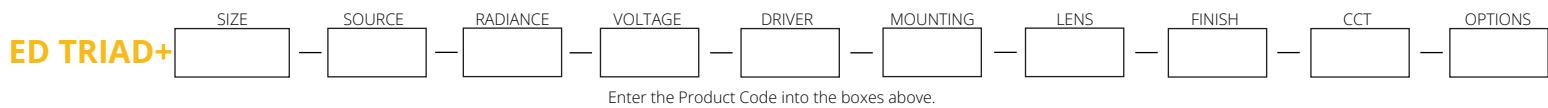


## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:



Enter the Product Code into the boxes above.

 \_\_\_\_\_ ft  
 2-8 ft Arm length.

**SOURCE**  
 5 W/ft  
 7 W/ft  
 10 W/ft

**RADIANCE**  
 DD - Direct

**VOLTAGE**  
 UNV - 120/277V  
 347V<sup>1</sup>  
1. Verify availability.
**DRIVER**  
 ST - On/Off  
 DL - 0-10V Dim (1%)  
 DLO - 0-10V Dim (to Off)  
 DL2 - 0-10V Dim (TW)  
 DLA - 0-10V Dim (Aux)  
 DA4 - DALI D4i  
 CV - Constant Voltage (RGBW)  
    
Specify dimming protocol.
**MOUNTING**  
 S6B - 6ft Cord BK<sup>1</sup>  
 S6W - 6ft Cord WH<sup>1</sup>  
 S  ft  
 SF - Surface Mount  
 RT - Recessed Trimless

**LENS**  
 OP - Opal

**FINISH**  
 BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 CF/RAL   
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.
**CCT**  
 30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
 RGBW<sup>1</sup>  
 TW - Tunable White (27K-65K)<sup>2</sup>  
    
1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.
**OPTIONS**  
 No Options<sup>1</sup>  
 EC - Emergency Circuit  
 CB - Casambi Bluetooth(TW, RGBW)  
 DMX - DMX (RGBW)  
 JD - JDRF Autonomy Sensor (DA4)  
 DOS - Daylight & Occupancy Sensor (DLA)  
 AWN - Athena Wireless Node (DLA)  
1. Leave empty.

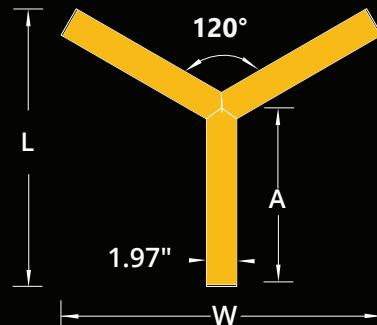
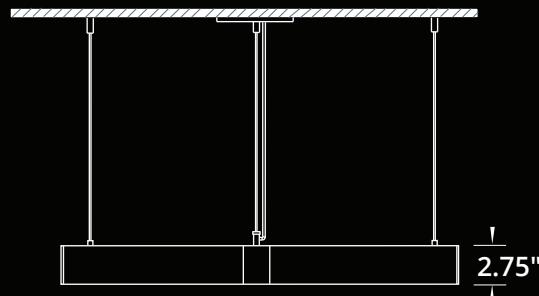
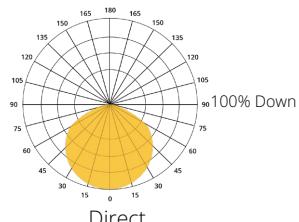
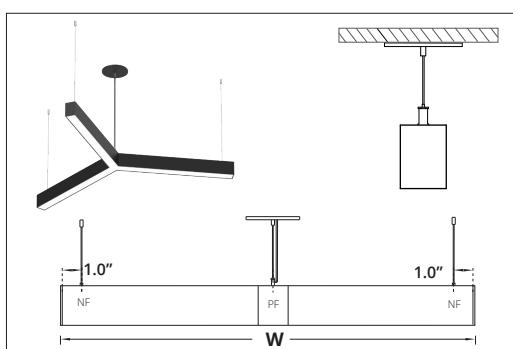
## LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Declare.

**Project:**
**Type:**

**SIZE:**

**RADIANCE:**

**MOUNTING:**

**SUSPENDED**

 PF - Power Feed, center of the fixture.  
 NF - Non Power Feed

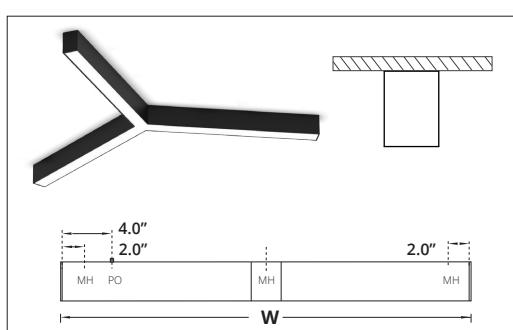
Size	A	L x W <sup>1</sup>
2 ft	24.45 in	37.53 x 43.33
3 ft	35.45 in	54.03 x 62.39
4 ft	48.20 in	73.15 x 84.47
5 ft	59.20 in	89.65 x 103.52
6 ft	71.95 in	108.78 x 125.61
7 ft	82.95 in	125.28 x 144.66
8 ft	95.70 in	144.40 x 166.74

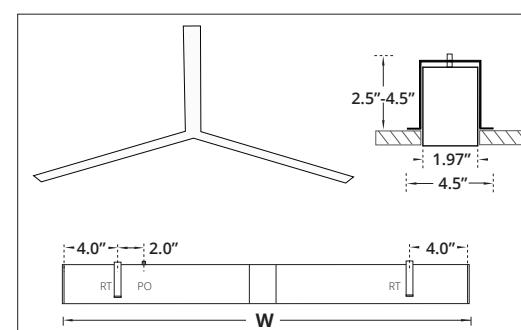
A - Arm Length

L - Total Length

W - Total Width

1. All dimensions are in Inches.


**SURFACE MOUNT**

 PO - Power Opening  
 MH - Mounting Hole

**RECESSED TRIMLESS**

 PO - Power Opening  
 RT - Recessed Trimless Bracket  
 Cutout Dimensions = Total Length x Width of Extrusion.