


FEATURES:

- ✓ Architectural luminaire with direct-indirect distribution.
- ✓ Light source: LED tape.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:
ED ORBIT+


Enter the Product Code into the boxes above.

SIZE

- 2 ft
- 3 ft
- 4 ft
- Specify required size.

SOURCE

- 25 W
- 50 W
- 75 W¹

1. Available for 4 ft.
2. Other Wattages are available.

RADIANCE

- IL - Inner Lit¹
- OL - Outer Lit²

1. 100% Inward
2. 100% Outward

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- Specify dimming protocol.

MOUNTING

- C4-Canopy 4 ft¹
- C6-Canopy 6 ft¹
- C ft²
- D4-Drop 4 ft
- D6-Drop 6 ft
- D ft²
- S4-Suspension 4 ft
- S6-Suspension 6 ft
- S ft²
- SF - Surface Mount

1. Canopy & Drop Suspensions are only available in standard sizes.
2. Please specify required length.

LENS

- OP - Opal

FINISH

- BK - Black¹
- WH - White²
- CF/RAL

1. RAL 9005
2. RAL 9003
Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- No Options¹
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

1. Leave empty.

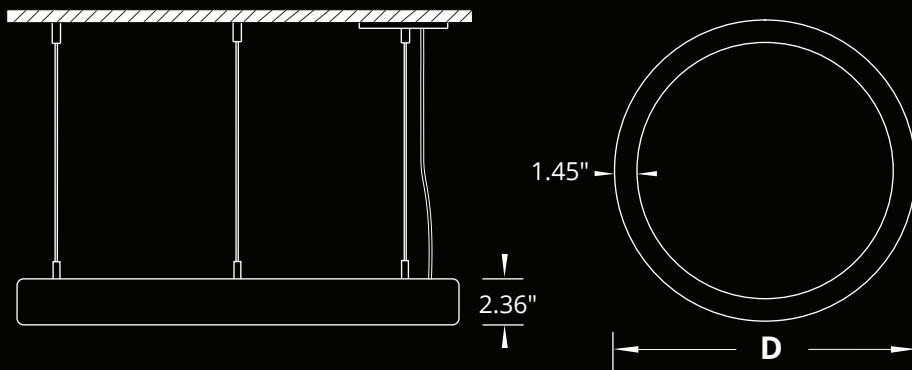
LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6610 lm	6750 lm	6890 lm

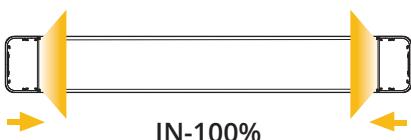


Declare.

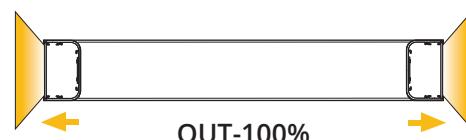
Project:
Type:

SIZE:


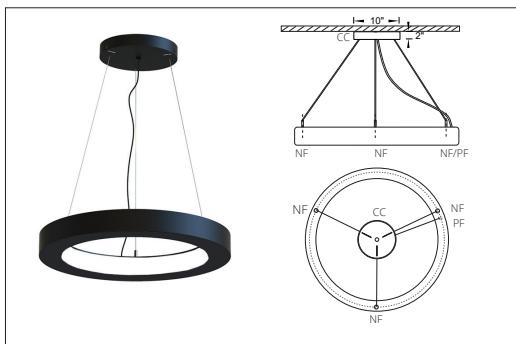
Diameter		
Size	Outer Lit	Inner Lit
2 ft	27.952 in	25.196 in
3 ft	34.250 in	37.795 in
4 ft	46.456 in	44.094 in

RADIANCE:
INNER LIT


IN-100%

OUTER LIT


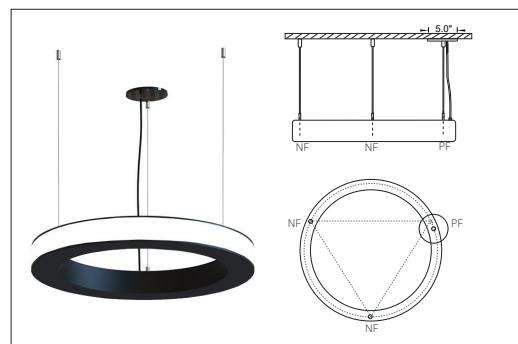
OUT-100%

MOUNTING:

SUSPENDED - CEILING CANOPY

CC - Ceiling Canopy - Available for 2-3-4 ft sizes

PF - Power Feed

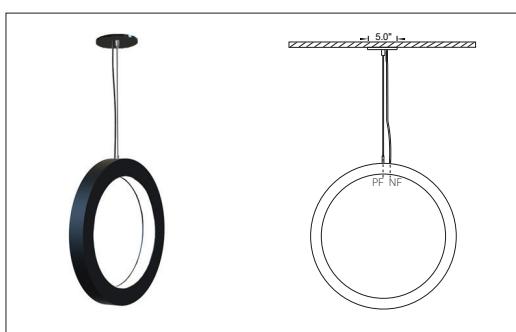
NF - Non Power Feed


SUSPENDED - STRAIGHT WIRE¹

PF - Power Feed

NF - Non Power Feed

1. Remote Driver.

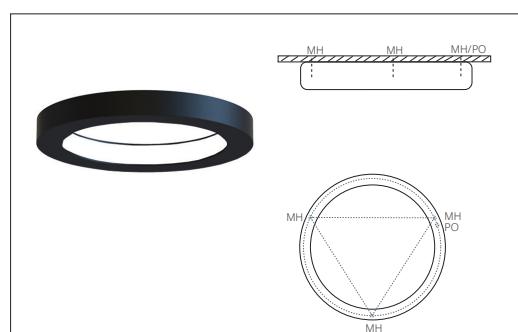

DROP SUSPENSION¹

DS - Drop Suspension - Available for 2-3-4 ft sizes

PF - Power Feed

NF - Non Power Feed

1. Remote Driver.


SURFACE MOUNT¹

PO - Power Opening

MH - Mounting Hole

1. Remote Driver.