

### FEATURES:

- ✓ Architectural linear luminaire with direct or direct/Indirect distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with a Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and wall mount installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

ED VECTOR+  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

#### TYPE

- ☐ DO - Dark Optic

#### SIZE

\_\_\_\_\_ Ft\*  
\*1-8 Ft Continuous Run.

#### SOURCE

- ☐ 3 W/Ft  
☐ 5 W/Ft  
☐ 8 W/Ft

#### RADIANCE

- ☐ DD - Direct (100%Down)  
☐ UD - Uneven (70%Down/30%Up)\*\*  
\*Light distribution.  
\*\*Not available for sizes shorter than 4 Ft.

#### VOLTAGE

- ☐ UNV - (120/277V)  
☐ 347V\*  
\*Not available for all configurations.

#### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DA4 - DALI D4i  
☐ EM - Emergency Driver\*  
☐  \*\*  
\*Battery Pack min. 4 Ft section.  
\*\*Specify dimming protocol.

#### MOUNTING

- ☐ S6W - 6Ft Cord WH\*  
☐ S6B - 6Ft Cord BK\*  
☐ S  Ft\*\*  
☐ WM - Wall Mount  
☐ WF - Wall Flush  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless

\*Canopy will match the Cord color.  
\*\*Specify Suspension length and color.

#### BEAM

- ☐ BF - Flood 50°  
☐ BW - Wide 80°  
☐ BA - Asymmetric

#### REFLECTOR

- ☐ SB - Black  
☐ SW - White  
☐ SR - Red  
☐ SL - Silver  
☐ SG - Gold  
☐ SM - Gunmetal

#### FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL  \*\*\*  
\*RAL 9005  
\*\*RAL 9016  
\*\*\*Specify required RAL number.

#### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐  \*  
\*Specify required CCT.

#### OPTIONS

- ☐ No Options\*  
☐ DC - Dual Circuit\*\*  
☐ CB - Casambi/Bluetooth  
☐  \*\*\*  
\*Leave empty.  
\*\*Control Downlight/Uplight separately.  
\*\*\*Specify required option.

### LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
3W	395 lm	405 lm	415 lm
5W	660 lm	675 lm	690 lm
8W	1050 lm	1080 lm	1130 lm



Project:

Type:

### SIZE:

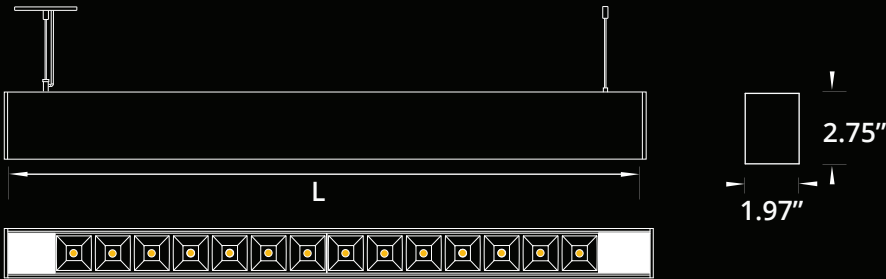

Size	L (Extrusion Length)
1 Ft	11.12 In
2 Ft	22.12 In
3 Ft	33.12 In
4 Ft	48.00 In
5 Ft	59.00 In
6 Ft	71.75 In
7 Ft	82.75 In
8 Ft	95.50 In

Total length with endcaps = L + 0.22"

\*Extrusion length included filler plate.

\*\*1-3 Ft, no filler plate requires.




\*\*\*4-8 Ft, filler plates at the end.

\*\*\*\*Continuous Run, filler plates in between & at the end.


### CONTINUOUS RUN:



### BEAM/RADIANCE:




### MOUNTING:

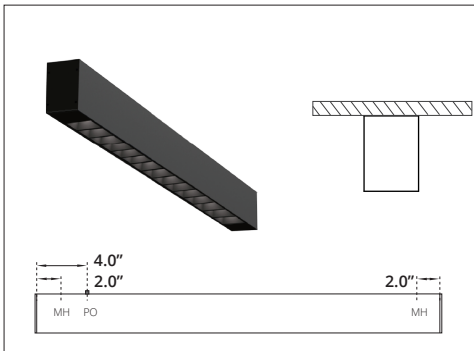


#### SURFACE MOUNT

MH - Mounting Hole  
PO - Power Opening

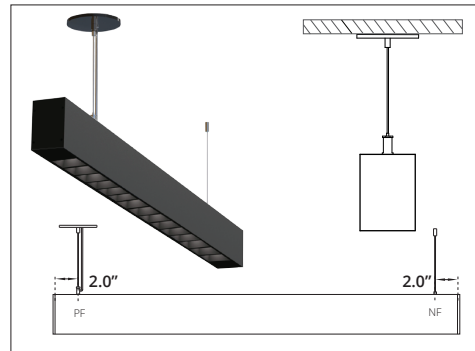


#### SUSPENDED

PF - Power Feed  
NF - Non Power Feed

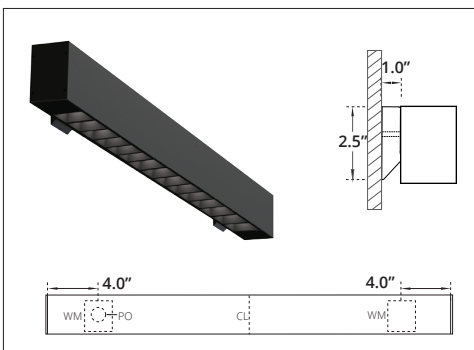

#### WALL MOUNT

PO - Power Opening  
WM - Wall Mount Bracket  
\*1-3 Ft, single Wall Mount Bracket with Power Opening in the centre.

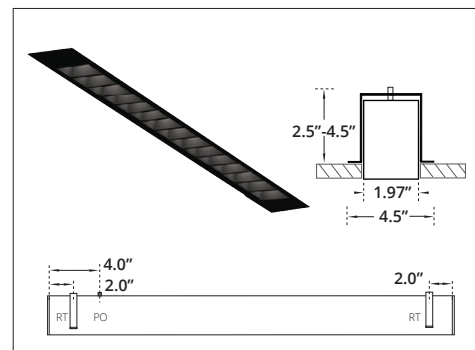

#### RECESSED TRIMLESS


RT - Recessed Trimless Bracket  
PO - Power Opening  
\*Cutout Dimensions = Total Length x Width of Extrusion.

### REFLECTORS:

#### SQUARE



#### WHITE



#### SILVER



#### BLACK



#### GOLD



#### RED



#### GUNMETAL