


## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed or wall mounted installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:



Enter the Product Code into the boxes above.

### SIZE

\_\_\_\_\_ ft  
1-8 ft  
Continuous Run  
(0.5 ft Increments)

### SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

### RADIANCE

- DD - Direct
  - ID - Indirect only
  - UD - Uneven<sup>1</sup>
1. Available in sizes 4 ft and up.

### VOLTAGE

- UNV - 120/277V
  - 347V<sup>1</sup>
1. Verify availability.

### DRIVER

- ST - On/Off
  - DL - 0-10V Dim (1%)
  - DLO - 0-10V Dim (to Off)
  - DL2 - 0-10V Dim (TW)
  - DLA - 0-10V Dim (Aux)
  - DA4 - DALI D4i
  - CV - Constant Voltage (RGBW)
  -
- Specify dimming protocol.

### MOUNTING

- S6B - 6 ft Cord BK<sup>1</sup>
- S6W - 6 ft Cord WH<sup>1</sup>
- S  ft<sup>2</sup>
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount
- RT - Recessed Trimless

1. Canopy match the Cord color.  
2. Specify Suspension length/color.

### LENS

- OP - Opal
- AS - Asymmetric
- PR - Prismatic

### FINISH

- BK - Black<sup>1</sup>
  - WH - White<sup>2</sup>
  - CF/RAL
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

- No Options<sup>1</sup>
- EM - Emergency Battery Pack<sup>2</sup>
- DC - Dual Circuit<sup>3</sup>
- EC - Emergency Circuit
- DR - Damp Rated
- CB - Casambi Bluetooth(TW, RGBW)<sup>4</sup>
- DMX - DMX (RGBW)
- JD - JDRF Autonomy Sensor (DA4)<sup>4</sup>
- DOS - Daylight & Occupancy Sensor (DLA)<sup>4</sup>
- AWN - Athena Wireless Node (DLA)<sup>4</sup>

1. Leave empty.  
2. Battery Pack per 4 ft section.  
3. Control Downlight/Uplight separately.  
4. Available in sizes 4 ft and up.

## LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:

Type:

**SIZE:**

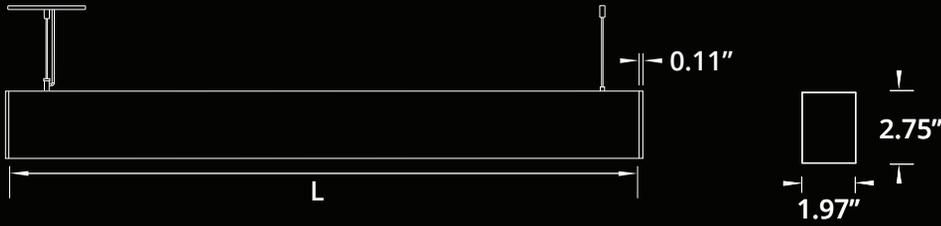

Size	L
1 ft	11.50 in
2 ft	24.25 in
3 ft	35.25 in
4 ft	48.00 in
5 ft	59.00 in
6 ft	71.75 in
7 ft	82.75 in
8 ft	95.50 in


L - Linear extrusion length only.  
Total length with Endcaps = L + (2 x 0.11)

**CONTINUOUS RUN:**




Continuous Run suspension dimensions  
L1 = L - 2.0 in


**RADIANCE:**

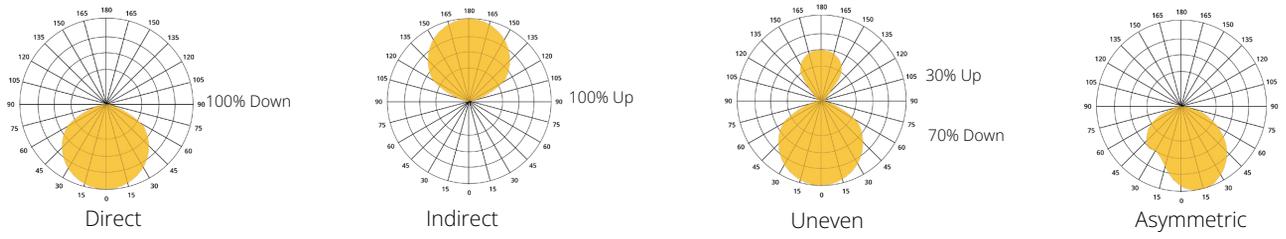


**MOUNTING:**

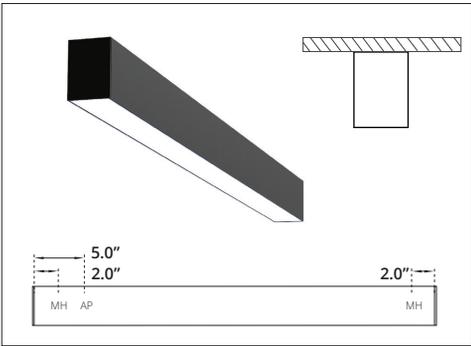


**SURFACE MOUNT**  
AP - Access Power Plate  
MH - Mounting Hole

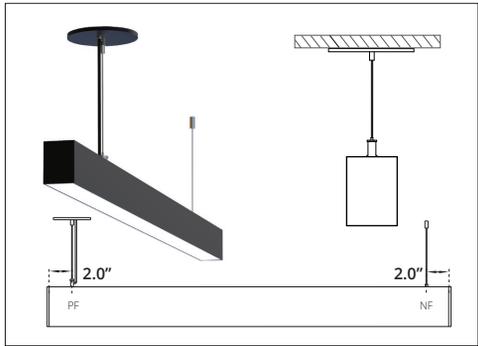


**SUSPENDED**  
PF - Power Feed  
NF - Non Power Feed

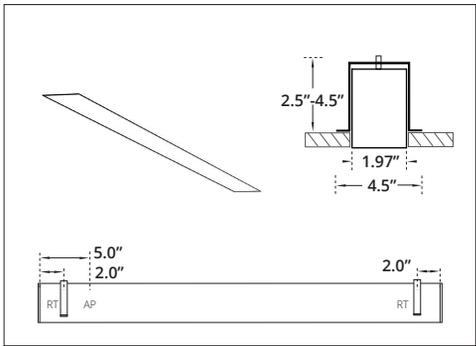


**RECESSED TRIMLESS**  
AP - Access Power Plate  
RT - Recessed Trimless Bracket  
Cutout Dimensions = Total Length x Width of Extrusion.

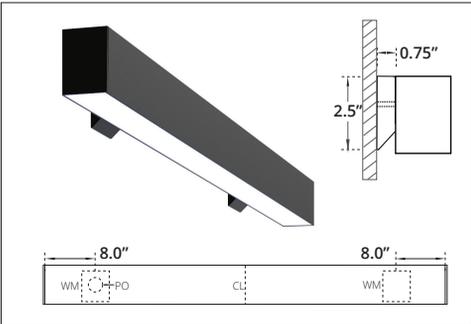

**WALL MOUNT**  
PO - Power Opening  
WM - Wall Mount Bracket  
1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

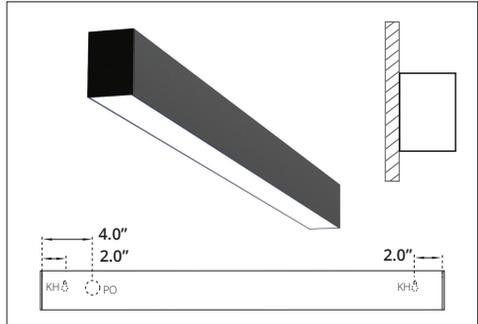

**WALL FLUSH**  
KH - Key Hole  
PO - Power Opening

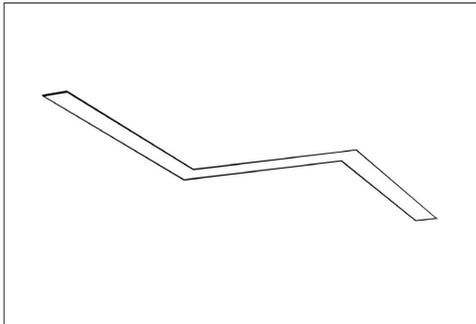

**VARIABLE ANGLE**  
60°, 90°, 120°, 135° or Custom.