



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency semi-specular integral reflector comes with 40° lighting distribution.
- ✓ Available with an optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Choice of integrated reflector for standard downlight or asymmetric wall wash illumination.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED RD+ SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — BEAM — TRIM — CCT

Enter the Product Code into the boxes above.

SIZE

 4 In

SOURCE

 10 W
 20 W

RADIANCE

 DD - Direct

VOLTAGE

 UNV - 120/277V
 347V¹

1. Verify availability.

DRIVER

 ST - On/Off
 DL - 0-10V Dim (1%)

Specify required dimming method.

MOUNTING

 RT - Retrofit
 NC- New Const. Plate

BEAM

 BF - Flood 40°
 BA - Asymmetric

TRIM

 BK - Black¹
 WH - White²
 1. RAL 9005
 2. RAL 9003


CCT

 30K - 3000 Kelvin/90CRI
 35K - 3500 Kelvin/90CRI
 40K - 4000 Kelvin/90CRI

Specify required CCT.

DIMENSIONS:

Height	Width	Cut Out
5.250"	4.375"	3.750"

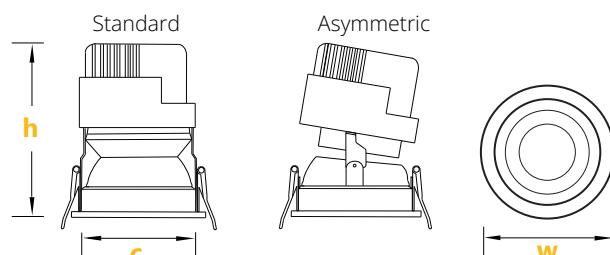

LUMEN OUTPUT:

Watts	30K	35K	40K
10 W	975 lm	1000 lm	1025 lm
20 W	1950 lm	2000 lm	2050 lm

Project:
Type: