


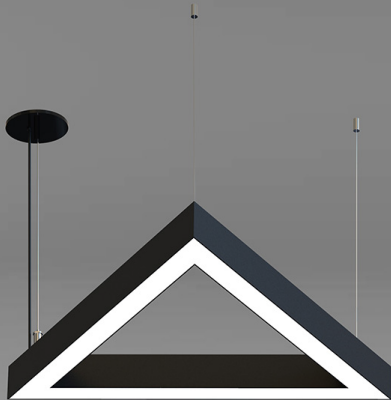

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TRIANGLE+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

_____ ft
 1-8 ft Arm length.

SOURCE

- ☐ 5 W/ft
☐ 7 W/ft
☐ 10 W/ft

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V ¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐
 Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK ¹
☐ S6W - 6ft Cord WH ¹
☐ S ft ²
☐ SF - Surface Mount
☐ RT - Recessed Trimless
 1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
 1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐
 1. Available with DMX or CB.
 2. Available with DL2, DA4 or CB.
 Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ JD - JDRF Autonomy Sensor (DA4)
☐ DOS - Daylight & Occupancy Sensor (DLA)
☐ AWN - Athena Wireless Node (DLA)
 1. Leave empty.

LUMEN OUTPUT W/ft:



Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Project:

Type:


SIZE:

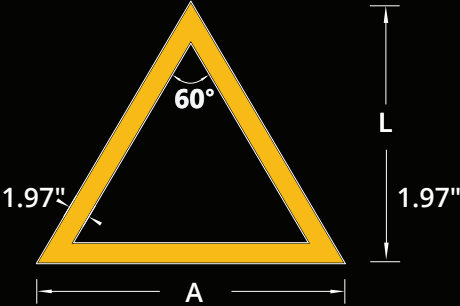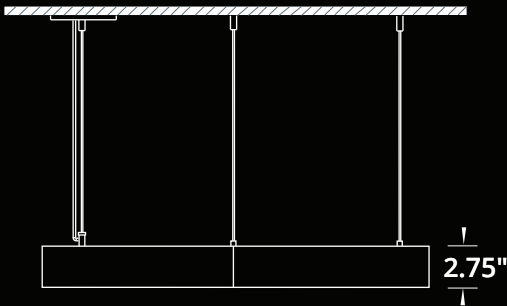

RADIANCE:




MOUNTING:

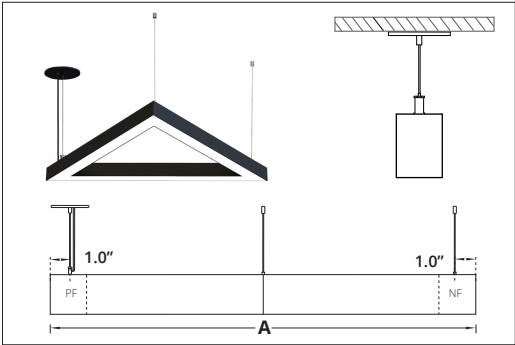


SUSPENDED
PF - Power Feed
NF - Non Power Feed

Size	A	L x A ¹
1 ft	15.11 in	13.01 x 15.11
2 ft	27.59 in	24.13 x 27.60
3 ft	38.86 in	33.65 x 38.86
4 ft	51.61 in	44.70 x 51.61
5 ft	62.61 in	54.22 x 62.61
6 ft	75.36 in	65.26 x 75.36
7 ft	86.36 in	74.80 x 86.36
8 ft	99.11 in	85.83 x 99.11

A - Arm Length
L - Total Length
1. All dimensions are in Inches.

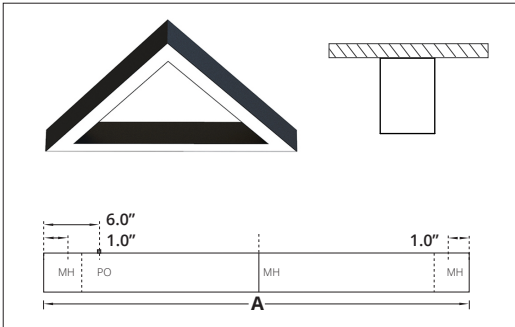

SURFACE MOUNT
PO - Power Opening
MH - Mounting Hole

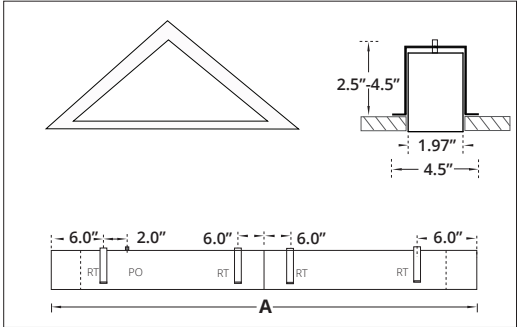

RECESSED TRIMLESS
PO - Power Opening
RT - Recessed Trimless Bracket
Cutout Dimensions = Total Length x Width of Extrusion.