


## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:



Enter the Product Code into the boxes above.

### SIZE

\_\_\_\_\_ ft  
2-8 ft.

### SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

### RADIANCE

- DD - Direct

### VOLTAGE

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.

### DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- \_\_\_\_\_

Specify dimming protocol.

### MOUNTING

- S6B - 6ft Cord BK<sup>1</sup>
- S6W - 6ft Cord WH<sup>1</sup>
- S \_\_\_\_\_ ft<sup>2</sup>
- SF - Surface Mount
- RT - Recessed Trimless

1. Canopy match the Cord color.  
2. Specify Suspension length/color.

### LENS

- OP - Opal

### FINISH

- BK - Black<sup>1</sup>
  - WH - White<sup>2</sup>
  - CF/RAL \_\_\_\_\_
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- \_\_\_\_\_

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

- No Options<sup>1</sup>
  - EC - Emergency Circuit
  - CB - Casambi Bluetooth(TW, RGBW)
  - DMX - DMX (RGBW)
  - JD - JDRF Autonomy Sensor (DA4)
  - DOS - Daylight & Occupancy Sensor (DLA)
  - AWN - Athena Wireless Node (DLA)
  - \_\_\_\_\_
1. Leave empty.

## LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Declare.<sup>®</sup>

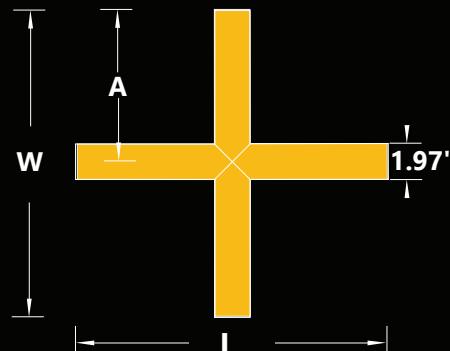
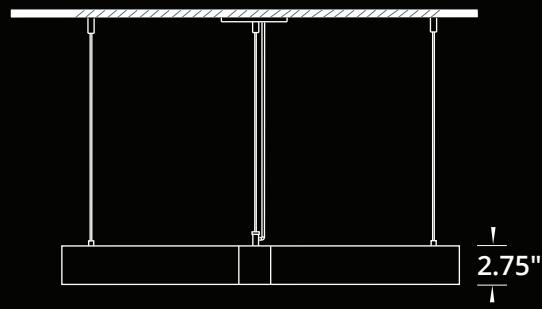

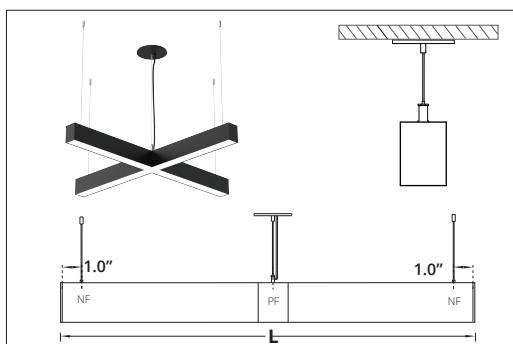
Project:

Type:

905-830-0339 / 1-800-667-9281

info@edisonlighting.ca

www.edisonlighting.ca

**SIZE:**

**RADIANCE:**

**MOUNTING:**

**SUSPENDED**

 PF - Power Feed, center of the fixture.  
 NF - Non Power Feed

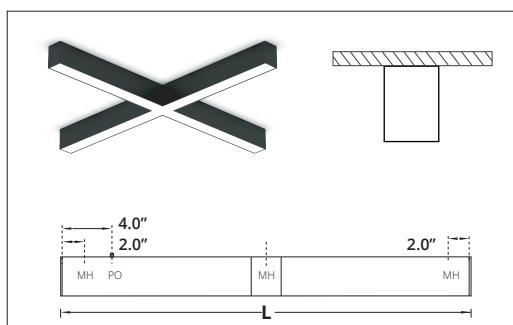
Size	A	L x W <sup>1</sup>
2 ft	11.70 in	23.62 x 23.62
3 ft	17.20 in	34.62 x 34.62
4 ft	24.45 in	49.12 x 49.12
5 ft	29.95 in	60.12 x 60.12
6 ft	35.45 in	71.12 x 71.12
7 ft	40.95 in	82.12 x 82.12
8 ft	48.20 in	96.62 x 92.62

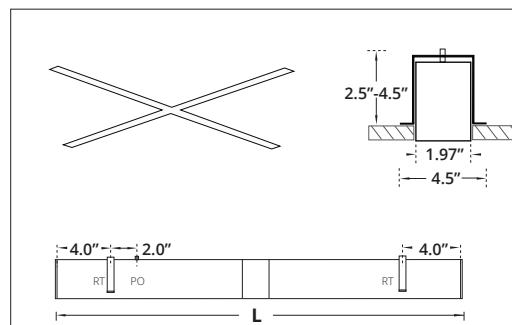
A - Arm Length

L - Total Length

W - Total Width

1. All dimensions are in Inches.


**SURFACE MOUNT**

 PO - Power Opening  
 MH - Mounting Hole

**RECESSED TRIMLESS**

 PO - Power Opening  
 RT - Recessed Trimless Bracket  
 Cutout Dimensions = Total Length x Width of Extrusion.