
**FEATURES:**

- ✓ Architectural curved system with direct lighting distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens or by optional prismatic optic.
- ✓ Sleek body of the luminaire is made from aluminum profile curved to desired shape.
- ✓ Suitable for non-insulated recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards. **reinventlight**

**SPECIFICATION:**

**ED CURVES+**  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

<b>SHAPE</b> <input type="checkbox"/> CR - Curve <input type="checkbox"/> OV - Oval <input type="checkbox"/> SQ - Square <input type="checkbox"/> RC - Rectangle <input type="checkbox"/> CS - Custom Shape <input type="text"/> Specify Custom Shape.	<b>SIZE</b> <input type="checkbox"/> _____ Linear ft Provide drawing (pdf or dwg).	<b>SOURCE</b> <input type="checkbox"/> 5 W/ft <input type="checkbox"/> 7 W/ft <input type="checkbox"/> 10 W/ft	<b>RADIANCE</b> <input type="checkbox"/> DD - Direct	<b>VOLTAGE</b> <input type="checkbox"/> UNV - 120/277V <input type="checkbox"/> 347V <sup>1</sup> 1. Verify availability.	<b>DRIVER</b> <input type="checkbox"/> ST - On/Off <input type="checkbox"/> DL - 0-10V Dim (1%) <input type="checkbox"/> DLO - 0-10V Dim (to Off) <input type="checkbox"/> DL2 - 0-10V Dim (TW) <input type="checkbox"/> DLA - 0-10V Dim (Aux) <input type="checkbox"/> DA4 - DALI D4i <input type="checkbox"/> CV - Constant Voltage (RGBW) <input type="checkbox"/> <input type="text"/> Specify dimming protocol.
--	--	---	---	--	---

<b>MOUNTING</b> <input type="checkbox"/> RS - Recessed	<b>LENS</b> <input type="checkbox"/> OP - Opal	<b>FINISH</b> <input type="checkbox"/> BK - Black <sup>1</sup> <input type="checkbox"/> WH - White <sup>2</sup> <input type="checkbox"/> CF/RAL <input type="text"/> 1. RAL 9005 2. RAL 9016 Specify required RAL number.	<b>CCT</b> <input type="checkbox"/> 30K - 3000 Kelvin/90CRI <input type="checkbox"/> 35K - 3500 Kelvin/90CRI <input type="checkbox"/> 40K - 4000 Kelvin/90CRI <input type="checkbox"/> RGBW <sup>1</sup> <input type="checkbox"/> TW - Tunable White (27K-65K) <sup>2</sup> <input type="checkbox"/> <input type="text"/> 1. Available with DMX or CB. 2. Available with DL2, DA4 or CB. Specify required CCT.	<b>OPTIONS</b> <input type="checkbox"/> No Options <sup>1</sup> <input type="checkbox"/> EC - Emergency Circuit <input type="checkbox"/> CB - Casambi Bluetooth(TW, RGBW) <input type="checkbox"/> DMX - DMX (RGBW) <input type="checkbox"/> AWN - Athena Wireless Node (DLA) 1. Leave empty.
---	---	---	---	---

**LUMEN OUTPUT W/ft:**


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



**Project:**

**Type:**


**SIZE:**

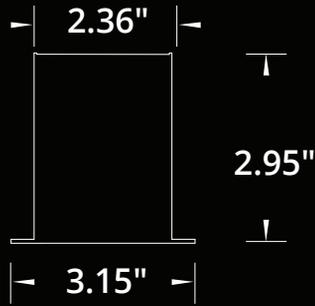


**MINIMUM RADIUS:**




**RADIANCE:**

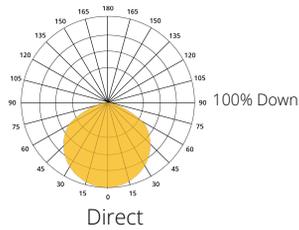


**SHAPES:**

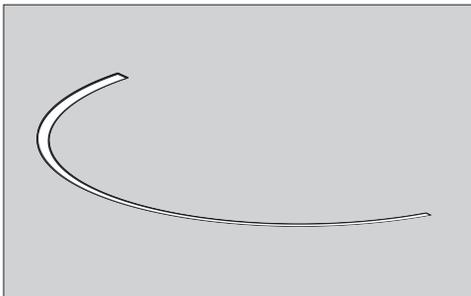


CURVE

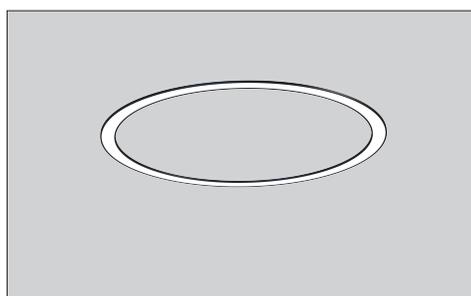


RING

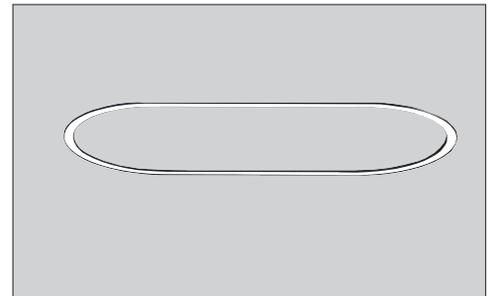


OVAL

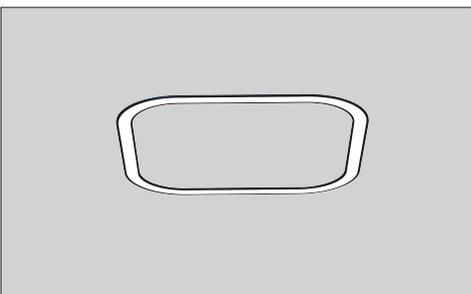

SQUARE

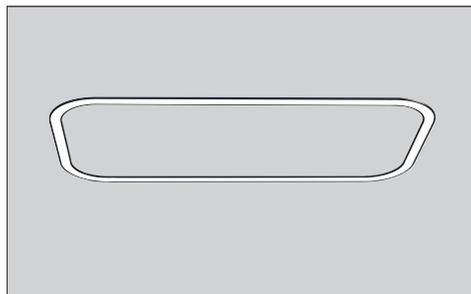

RECTANGLE

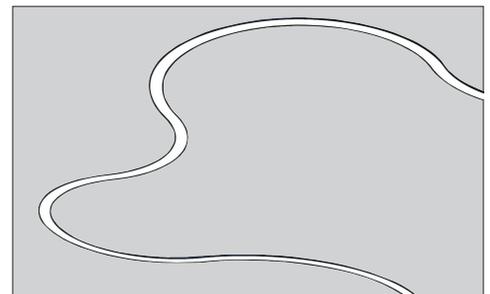

CUSTOM SHAPE