

**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Even illumination is provided by variety of high efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface,suspended,recessed and damp area installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**


Enter the Product Code into the boxes above.

**SIZE**

\_\_\_\_\_ Feet

**SOURCE**

- 5W/FT LED
- 7W/FT LED
- 10W/FT LED

**RADIANCE**

- DD - Direct (100%Down)
- ID - Indirect (100%Up)\*\*
- UD - Uneven (70%Down/30%Up)\*\*

\*Light Distribution.  
 \*\*Not available for Surface Mount Configuration.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- \*
- EC - Emergency Circuit
- EM - Emergency\*\*

\* Please specify dimming method.  
 \*\*Battery Pack per 4Feet section.

**MOUNTING**

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount
- RT - Recessed Trimless

\*Please specify required Length.

**LENS**

- OP - Opal
- WW - Wall Wash
- PR - Prismatic
- BL - Black Lens
- AR - Aluminum Reflector\*

\* Available for 4Feet only (Actual length included).

**FINISH**

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#

**CCT**

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- RGBW\*
- TW - Tunable White\*\*  
(2700K-6500K)

\*Available with Dali, DMX or Bluetooth controls.  
 \*\*Available with 0-10V,Dali or Bluetooth controls.

**OPTIONS**

- No Options\*
- DR - Damp Rated
- DC - Dual Circuit\*\*
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
 \*\*Down /Up Control separately.  
 \*\*\*Combination example (DR/DOS).

**LUMEN OUTPUT W/Ft:**


Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm



Project:

Type:

**SIZE:**

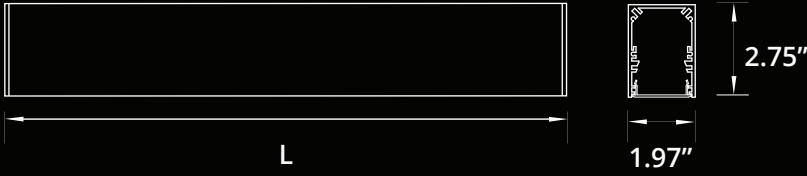

Size	L (LENGTH)
1 Feet	11.780 Inch
2 Feet	24.530 Inch
3 Feet	35.530 Inch
4 Feet	48.280 Inch
5 Feet	59.280 Inch
6 Feet	72.030 Inch
7 Feet	83.030 Inch
8 Feet	95.780 Inch

**RADIANCE:**


**DIRECT DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

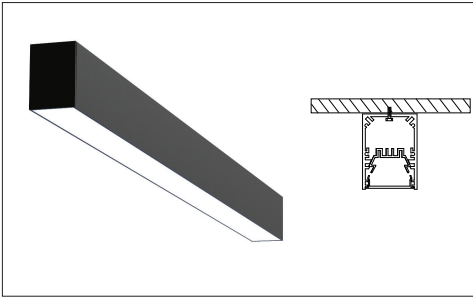


**SURFACE MOUNT**

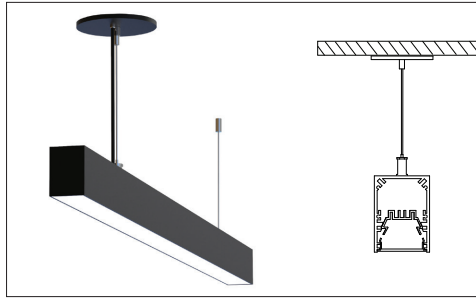


**SUSPENDED**

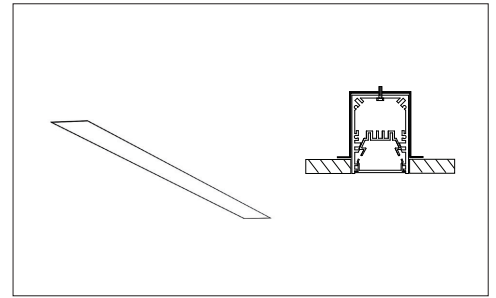


**RECESSED TRIMLESS**

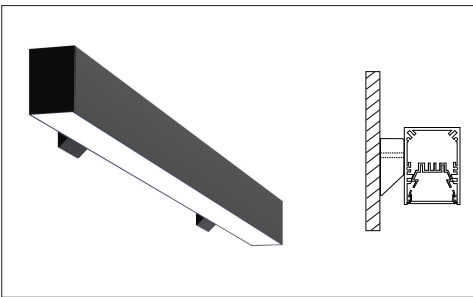

**WALL MOUNT**

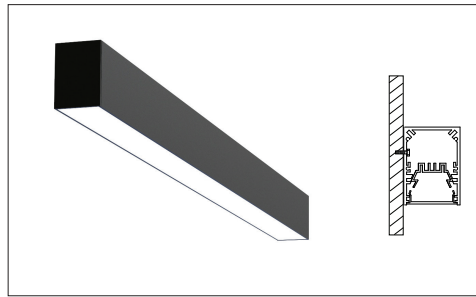

**WALL FLUSH**

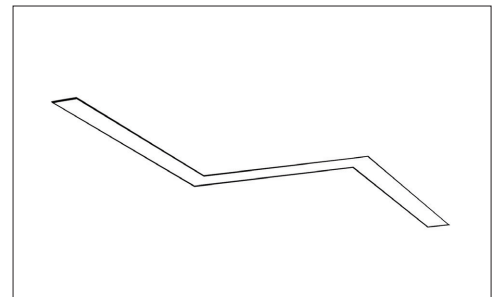

**90° LEFT/90° RIGHT**