
**FEATURES:**

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure. Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

**reinventlight**
**SPECIFICATION:**

**ED CURVE+**  SIZE  SOURCE  RADIANCE  VOLTAGE  DRIVER  MOUNTING  LENS  FINISH  CCT  OPTIONS

Enter the Product Code into the boxes above.

**SIZE**

- 40 Inch
- 50 Inch

**SOURCE**

- 20WLED
- 30WLED
- 40WLED\*

\*Available for 50Inch-Uneven Distribution only.

**RADIANCE**

- DD - Direct (100%Down)
- ID - Indirect (100%Up)\*\*
- UD - Uneven(70%Down/30%Up)\*\*

 \*Light Distribution.  
 \*\*Suspended Configuration only.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*

\* Please specify dimming method.

**MOUNTING**

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- SF - Surface Mount

\*Please specify required Length.

**LENS**

- OP - Opal

**FINISH**

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#

**CCT**

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- TW - Tunable White\*\* (2700K-6500K)

 \*Other options are available.  
 \*\*Available with Dali controls.

**OPTIONS**

- No Options\*
- DS-Daylight Sensor
- DC - Dual Circuit\*\*
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

 \*Leave Empty.  
 \*\*Down /Up Control separately.



**LUMEN OUTPUT:**

Watts	30K	35K	40K
20W	2070 lm	2125 lm	2180 lm
30W	3065 lm	3150 lm	3235 lm
40W	4086 lm	4200 lm	4313 lm


 Project: 

 Type:

**SIZE:**

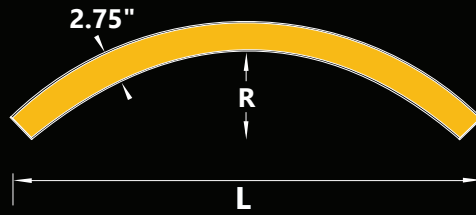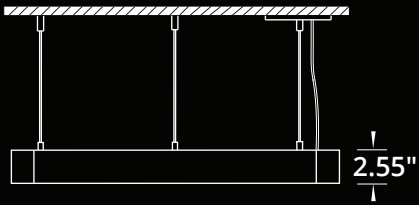

Length	Radius
40 Inch	30 Inch
50 Inch	35 Inch

**RADIANCE:**


**DIRECT DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

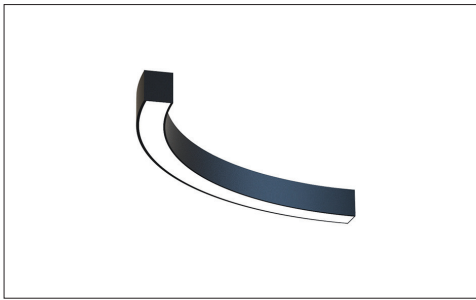


SURFACE MOUNT

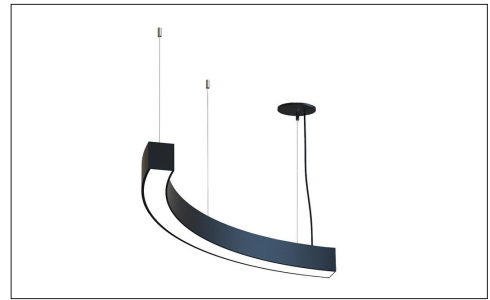

SUSPENDED

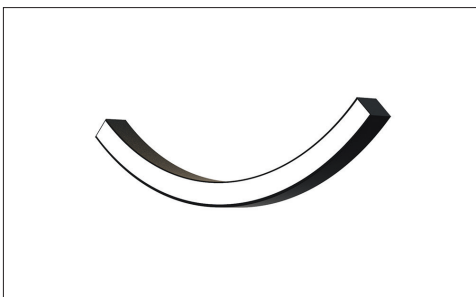

WALL MOUNT

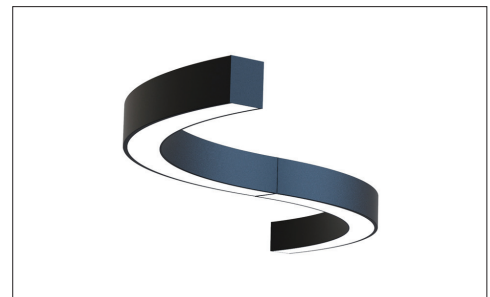

CUSTOM - INFINITY