



### FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

### SPECIFICATION:

**Sonic CUBIC+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

- |   |   |   |  |  |
|---|---|---|--|--|
| <b>TYPE</b><br><input type="checkbox"/> ES - Engrave<br><input type="checkbox"/> CS - Custom Cut<br><input type="checkbox"/> PS - Perforation<br><input type="checkbox"/> LS - Layers<br><input type="checkbox"/> SS - Standard | <b>HEIGHT</b><br><input type="checkbox"/> 12 Inch<br><input type="checkbox"/> 16 Inch<br><input type="checkbox"/> 24 Inch | <b>SOURCE</b><br><input type="checkbox"/> 15W LED<br><input type="checkbox"/> 20W LED<br><input type="checkbox"/> 25W LED | <b>VOLTAGE</b><br><input type="checkbox"/> 120V<br><input type="checkbox"/> 277V | <b>DRIVER</b><br><input type="checkbox"/> ST - Standard<br><input type="checkbox"/> DL - 0-10V Dimming<br><input type="checkbox"/> DT - TRIAC<br><input type="checkbox"/> <input type="text"/> * |
|---|---|---|--|--|

\* Please specify dimming method (ELV).


- |  |   |  |   |
|--|---|--|---|
| <b>MOUNTING</b><br><input type="checkbox"/> S4-Suspension 4Feet<br><input type="checkbox"/> S6-Suspension 6Feet<br><input type="checkbox"/> S <input type="text"/> Feet* | <b>LOUVER</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black | <b>ED CUBIX+ FINISH</b><br><input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> GR - Grey* | <b>CCT</b><br><input type="checkbox"/> 30K - 3000Kelvin/90CRI<br><input type="checkbox"/> 35K - 3500Kelvin/90CRI<br><input type="checkbox"/> 40K - 4000Kelvin/90CRI |
|--|---|--|---|

\*Please specify required Length.

\*Supply with White Cord & Canopy

\*Other options are available.

### ACOUSTIC FINISH

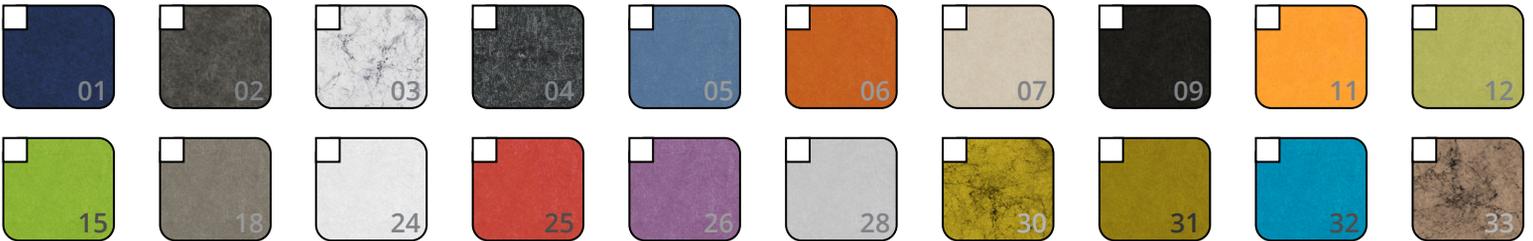

### LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm





Project:

Type:

**SIZE:**

H - Height	Length	Width
12 Inch = 11.75 Inch	16.00 Inch	16.00 Inch
16 Inch = 15.75 Inch	21.50 Inch	21.50 Inch
24 Inch = 23.75 Inch	30.50 Inch	30.50 Inch

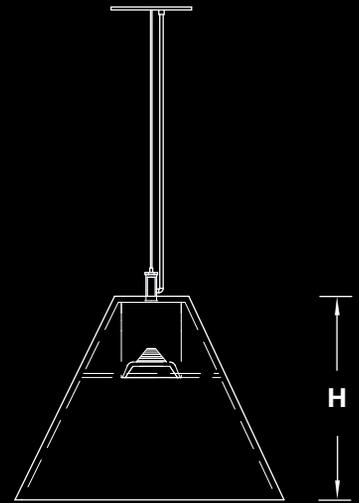

**DESIGN:**



ES - ENGRAVE



CS - CUSTOM CUT




PS - PERFORATION




LS - LAYERS

**STANDARD SHADE FINISHES:**




#15



#05



#25



#26