



FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED strips.
- ✓ Diffused illumination is provided by high efficiency opal lens.
- ✓ Distinctive shape and magnetic sides of the luminaire provide tool free option is used as a building block to create unique design forms.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED MILA+ SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

SOURCE

- 20WLED
- 40WLED

RADIANCE

- DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method (ELV).

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- WM - Wall Mount
- SF - Surface Mount

*Please specify required Length.

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#
- VD - Vinyl Decal*

* Please provide 600dpi Image.

CCT

- 30K - 3000Kelvin/90CRI
- 35K - 3500Kelvin/90CRI
- 40K - 4000Kelvin/90CRI
- TW - Tunable White**
(2700K-6500K)

*Other options are available.
**Available with Dali controls.

OPTIONS

- No Options*
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

*Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:



| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 20W | 2100 lm | 2125 lm | 2200 lm |
| 40W | 4200 lm | 4300 lm | 4400 lm |



Project:

Type:


SIZE:

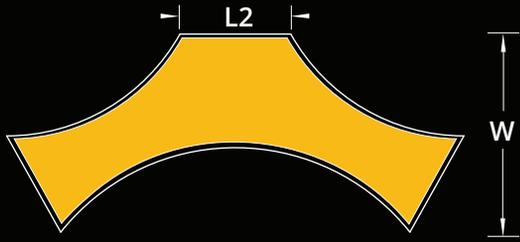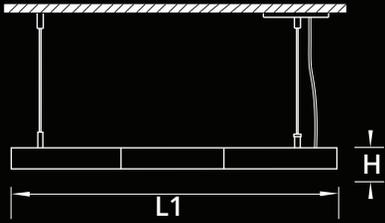

| Height | Width |
|------------|------------|
| 2.750 Inch | 17.50 Inch |
| L1 | L2 |
| 40.75 Inch | 9.750 Inch |


RADIANCE:

DIRECT DISTRIBUTION

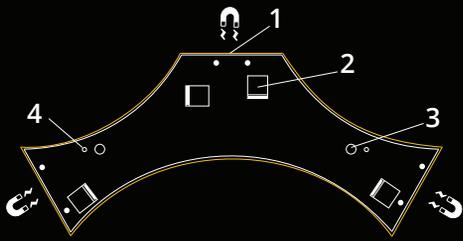


| Keys | |
|------|---------------------|
| 1 | 3 x Magnet Sides |
| 2 | 4 x Wago connectors |
| 3 | 2 x SF Mountings |
| 4 | 2 x SS Mountings |


MOUNTING:

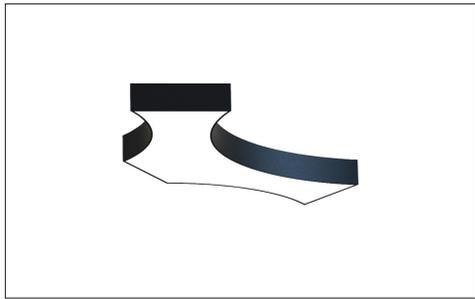


SURFACE MOUNT

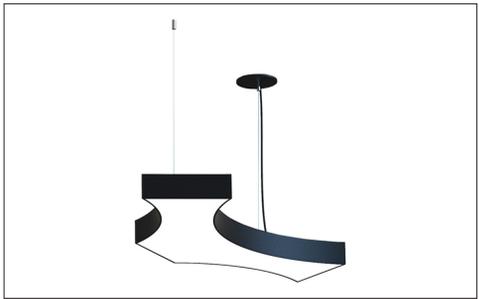

SUSPENDED

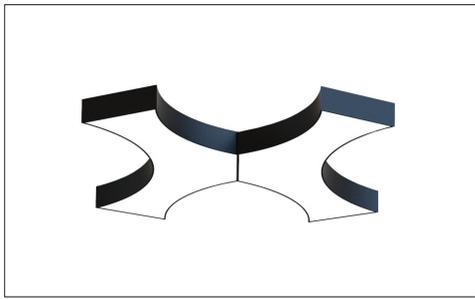

CUSTOM

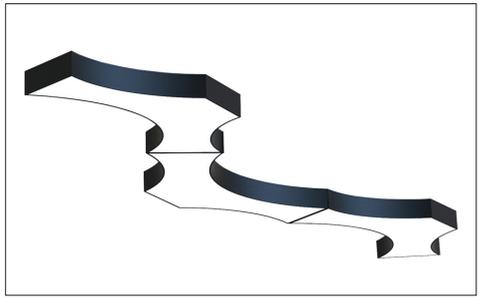

CUSTOM - INFINITY