

## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Even illumination is provided by variety of high efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for suspended, wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finishes.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

ED VECTOR5+  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### SIZE

\_\_\_\_\_ Feet

### SOURCE

- 5W/Ft LED
- 10W/Ft LED
- 15W/Ft LED

### RADIANCE

- ED - Even(50%Down/50%Up)
- UD - Uneven(70%Down/30%Up)
- DD - Direct (100%Down)
- ID - Indirect (100%Up)

\*Light Distribution.

### VOLTAGE

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

### DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- \*
- EC - Emergency Circuit
- EM - Emergency\*\*

\* Please specify dimming method.  
\*\*Battery Pack per 4Feet section.

### MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- WF - Wall Flush

\*Please specify required Length.

### LENS

- OP - Opal
- PR - Prismatic

### FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#

### CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- RGBW\*
- TW - Tunable White\*\*  
(2700K-6500K)

\*Available with Dali, DMX or Bluetooth controls.  
\*\*Available with 0-10V,Dali or Bluetooth controls.

### OPTIONS

- No Options\*
- DR - Damp Rated
- DC - Dual Circuit\*\*
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
\*\*Down /Up Control separately.  
\*\*\*Combination example (DR/DOS).

## LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	535 lm	550 lm	565 lm
10W	1070 lm	1100 lm	1130 lm
15W	1610lm	1650 lm	1690 lm



Project:

Type:

**SIZE:**

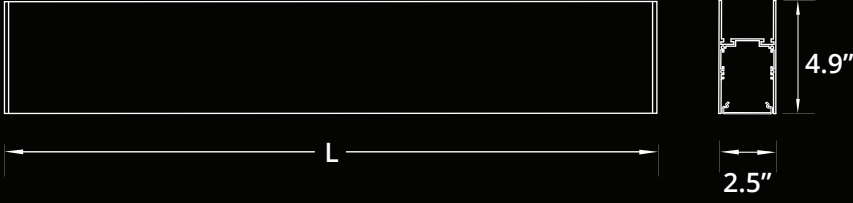

Size	L (LENGTH)
1 Foot	11.75 Inch
2 Feet	24.50 Inch
3 Feet	35.50 Inch
4 Feet	48.25 Inch
5 Feet	59.25 Inch
6 Feet	72.00 Inch
7 Feet	83.00 Inch
8 Feet	95.75 Inch

**RADIANCE:**


**EVEN DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

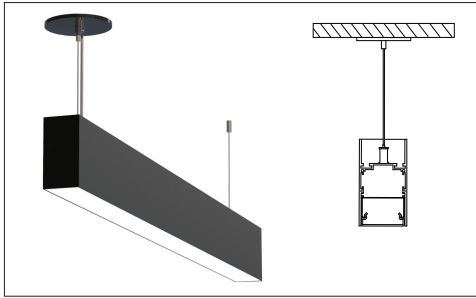


SUSPENDED

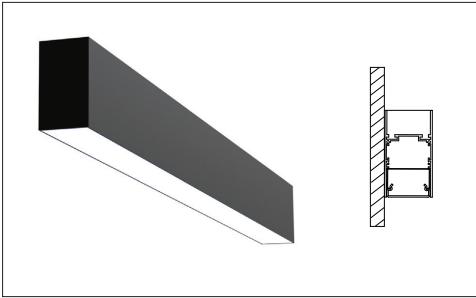

WALL FLUSH

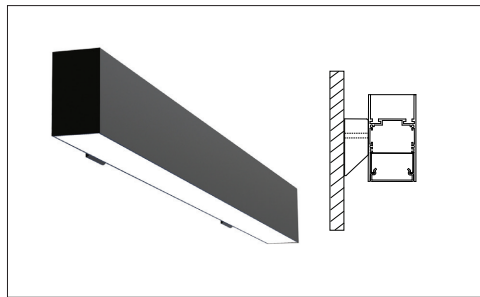

WALL MOUNT

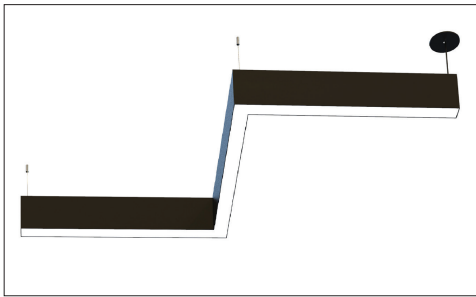

90° LEFT/90° RIGHT WITH