




**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency semi-specular integral reflector comes with 40° lighting distribution.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Choice of integrated reflector for standard downlight or asymmetric wallwash illumination.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

**SPECIFICATION:**



**SIZE**

- 4 Inch

**SOURCE**

- 10W LED
- 20W LED

**RADIANCE**

- DD - Direct (100%Down) \*Light Distribution.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DT - TRIAC
- \*

\* Please specify dimming method.

**MOUNTING**

- RT -Retrofit
- NC- New Const. Plate

**REFLECTOR**

- ST - Standard
- AS - Asymmetric

**TRIM**

- WH - White
- BK- Black
- GR - Grey

**CCT**

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin


\*Other options are available.

**DIMENSIONS:**

Height	Width	Cut Out
5.250"	4.375"	3.750"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
10W	975 lm	1000 lm	1025 lm
20W	1950 lm	2000 lm	2050 lm

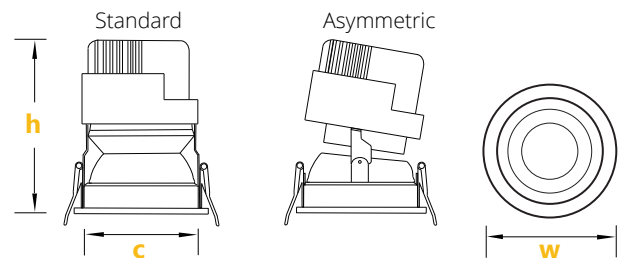

Project:

Type: