



## FEATURES:

- ✓ Architectural luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high-efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines aluminum body with a high-efficiency opal lens.
- ✓ Suitable for surface-mounted, suspended installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available in custom color option.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Proven performance in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

ED DRUM+

SIZE —  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  LENS —  FINISH —  CCT —  OPTIONS

Enter the Product Code into the boxes above.

### SIZE

- 2 ft
- 3 ft
- 4 ft

### SOURCE

- 25 W
- 50 W
- 75 W<sup>1</sup>

1. Available for 4ft & Custom sizes.  
2. Other Wattages are available.

### RADIANCE

- DD - Direct
- UD - Uneven

### VOLTAGE

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.

### DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i (TW)
- CV - Constant Voltage (RGBW)
- 

Specify dimming protocol.

### MOUNTING

- C6B - 6 ft Canopy BK<sup>1</sup>
- C6W - 6 ft Canopy WH<sup>1</sup>
- C  ft<sup>2</sup>
- S6B - 6 ft Cord BK<sup>1</sup>
- S6W - 6 ft Cord WH<sup>1</sup>
- S  ft<sup>2</sup>
- R6B - Stem 2 ft BK<sup>1</sup>
- R6W - Stem 2 ft WH<sup>1</sup>
- R  ft<sup>2</sup>
- SF - Surface Mount

1. Canopy match the Cord color.  
2. Specify Suspension length and color.  
3. Stem Mounting is available only for 2ft Drum size.

### LENS

- OP - Opal

### FINISH

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>
- CF/RAL

1. RAL 9005  
2. RAL 9003  
Specify required RAL number.

### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

- No Options<sup>1</sup>
- DC - Dual Circuit<sup>2</sup>
- EC - Emergency Circuit
- CB - Casambi Bluetooth (TW, RGBW)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

1. Leave empty.  
2. Control Downlight/Uplight separately.

## LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm
75 W	7720 lm	7875 lm	8030 lm





Declare.



Project:

Type:

**SIZE:**

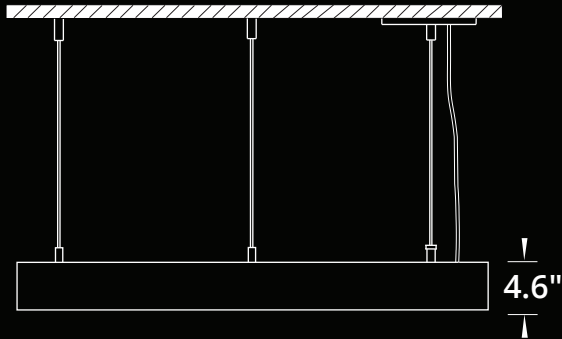


**RADIANCE:**

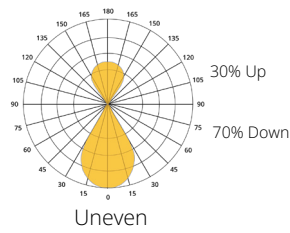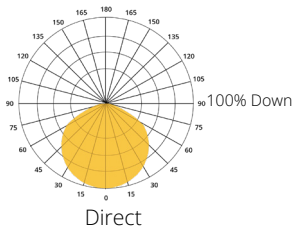


Size	Diameter
2 ft	23.60 in
3 ft	35.40 in
4 ft	47.20 in


**MOUNTING:**

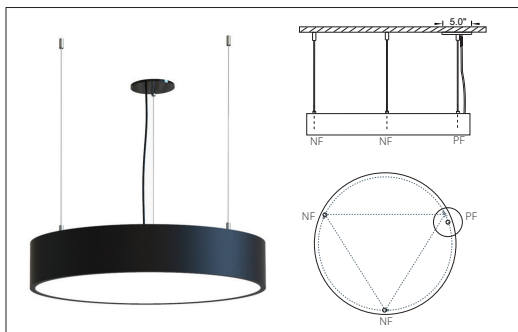


**SUSPENDED - STRAIGHT WIRE**  
 PF - Power Feed  
 NF - Non Power Feed

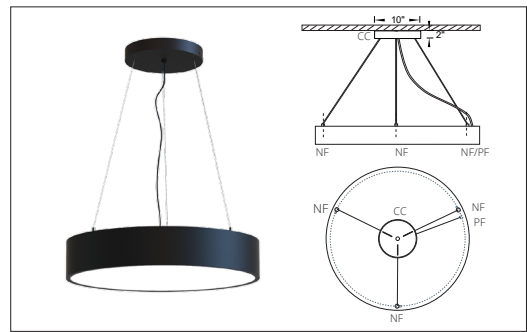

**SUSPENDED - CEILING CANOPY**  
 CC - Ceiling Canopy - Available for 2-3-4 ft sizes  
 PF - Power Feed  
 NF - Non Power Feed

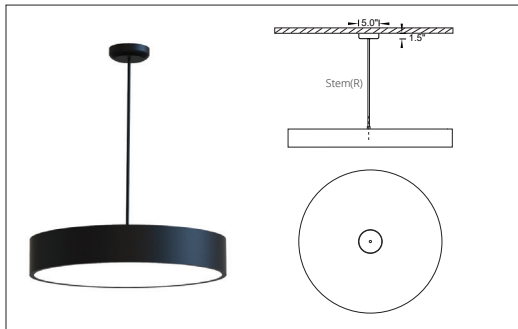

**SUSPENDED - STEM**  
 Available only for 2ft Drum size  
 3/8" IPS Stem with Power Feed

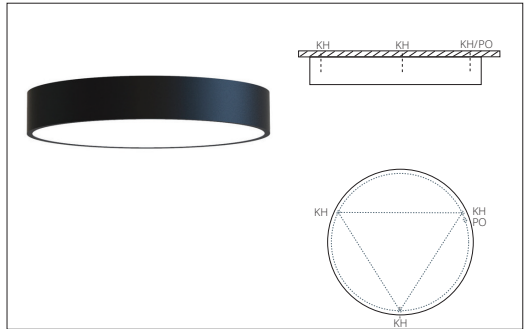

**SURFACE MOUNT - (SF)**