




FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Available with white aluminum or optional polycarbonate prismatic reflector.
- ✓ Suitable for suspended installation.
- ✓ Aluminum body with integrated driver. Available in white, black and grey finishes.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office and commercial installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



SOURCE

- 17W LED
- 34W LED

RADIANCE

- DD - Direct (100% Down)
*Light Distribution

VOLTAGE

- 120V
 - 277V
 - 347V*
- *Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - BT - Bluetooth
 - *
- * Please specify dimming method.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*

*Please specify required Length.

REFLECTOR

- AL - Aluminum
- PR - Prismatic

FINISH

- WH - White
- BK - Black
- GR - Grey

CCT


- 30K/90CRI - 3000Kelvin
 - 35K/90CRI - 3500Kelvin
 - 40K/90CRI - 4000Kelvin
- *Other options are available.

DIMENSIONS:

Height	Width
13.75"	12.25"

LUMEN OUTPUT:

Watts	30K	35K	40K
17W	1950 lm	2000 lm	2050 lm
34W	3900 lm	4000 lm	4100 lm

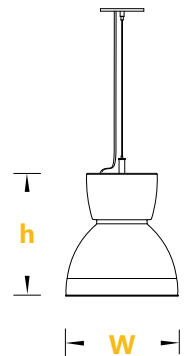

Project:

Type: