

### **FEATURES:**

- Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- Even illumination is provided by high efficiency opal lenses.
- Available for row-mounted installations in various lengths.
- Suitable for surface, suspended, recessed or wall mounted installations.
- Extruded aluminum body comes with a standard black or white finish.
- Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:							
ED VECTOR2+	SIZE SOURCE —	RADIANCE VOLTAGE  Enter the Product	DRIVER MOUNTING LE	ENS FINISH CCT OPTIONS			
ft 1-8 ft Continuous Run (0.5 ft Increments)	SOURCE  5 W/ft 7 W/ft  10 W/ft	RADIANCE  DD - Direct  UD - Uneven <sup>1</sup> 1. Available in sizes 4 ft and up.	VOLTAGE  ☐ UNV - 120/277V ☐ 347V¹ 1. Verify availability.	DRIVER  ST - On/Off  DL - 0-10V Dim (1%)  DLO - 0-10V Dim (to Off)  DL2 - 0-10V Dim (TW)  DLA - 0-10V Dim (Aux)  DA4 - DALI D4i  CV - Constant Voltage (RGBW)  Specify dimming protocol.			
MOUNTING  S6B - 6ft Cord BK¹  S6W - 6ft Cord WH¹  S ft²  WM - Wall Mount  WF - Wall Flush  SF - Surface Mount  RT - Recessed Trimles  1. Canopy match the Cord color. 2. Specify Suspension length/colo	or.	FINISH  BK - Black¹  WH - White²  CF/RAL  RAL 9005  RAL 9016  Specify required RAL number.	GCT  30K - 3000 Kelvin/90CRI  35K - 3500 Kelvin/90CRI  40K - 4000 Kelvin/90CRI  RGBW¹  TW - Tunable White (27K-65K)²  1. Available with DMX or CB. 2. Available with DL2, DA4 or CB. Specify required CCT.	OPTIONS  No Options¹  EM - Emergency Battery Pack²  DC - Dual Circuit³  EC - Emergency Circuit  DR - Damp Rated  CB - Casambi Bluetooth(TW, RGBW)⁴  DMX - DMX (RGBW)  JD - JDRF Autonomy Sensor (DA4)⁴  DOS - Daylight & Occupancy Sensor (DLA)⁴  AWN - Athena Wireless Node (DLA)⁴  1. Leave empty. 2. Battery Pack per 4 ft section. 3. Control Downlight/Uplight separately. 4. Available in sizes 4 ft and up.			
	5K 40K		Project	<b>.</b>			

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm















905-830-0339 / 1-800-667-9281




info@edisonlighting.ca



www.edisonlighting.ca



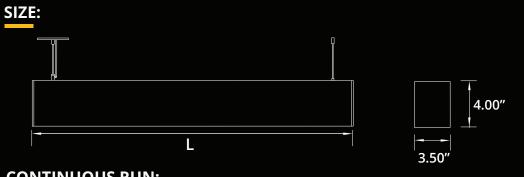

Size	<b>L</b> (Total Length)
1 ft	11.72 in
2 ft	24.47 in
3 ft	35.47 in
4 ft	48.22 in
5 ft	59.22 in
6 ft	71.97 in
7 ft	82.97 in
8 ft	95.72 in

Total length with endcaps

# **CONTINUOUS RUN:**




## **RADIANCE:**






### **MOUNTING:**




## **SURFACE MOUNT**

MH - Mounting Hole PO - Power Opening




#### **WALL MOUNT**

PO - Power Opening WM - Wall Mount Bracket 1-3 ft, single Wall Mount Bracket with Power Opening in the centre.




### **SUSPENDED**

PF - Power Feed NF - Non Power Feed




### WALL FLUSH

KH - Key Hole PO - Power Opening



### **RECESSED TRIMLESS**

RT - Recessed Trimless Bracket PO - Power Opening Cutout Dimensions = Total Length x Width of Extrusion.



**VARIABLE ANGLE** 

60°, 90°, 120°, 135° or Custom



905-830-0339 / 1-800-667-9281



info@edisonlighting.ca



www.edisonlighting.ca