

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted and suspended installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with 90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED CUBIC+ — — — — — — —

Enter the Product Code into the boxes above.

SOURCE

- ☐ 15W LED
- ☐ 20W LED
- ☐ 25W LED

RADIANCE

- ☐ DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

* External step down transformer per luminaire.

DRIVER

- ☐ ST - Standard (Non-Dimming)
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ *

*Please specify dimming method.

MOUNTING

- ☐ SF - Surface Mount
- ☐ S4 - Suspension 4Feet
- ☐ S6 - Suspension 6Feet
- ☐ S Feet*
- ☐ R2 - Stem 2Feet
- ☐ R3 - Stem 3Feet
- ☐ R Feet*

* Please specify required Length.

LOUVER

- ☐ BK - Black
- ☐ WH - White
- ☐ SL - Silver

FINISH

- ☐ BK - Black
- ☐ WH - White

CCT

- ☐ 30K - 3000Kelvin/90CRI
- ☐ 35K - 3500Kelvin/90CRI
- ☐ 40K - 4000Kelvin/90CRI


*Other options are available.

DIMENSIONS:

Width	Height
4.5"	6.0"

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

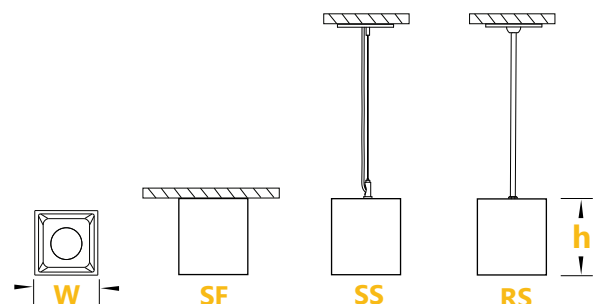

Project:

Type: