


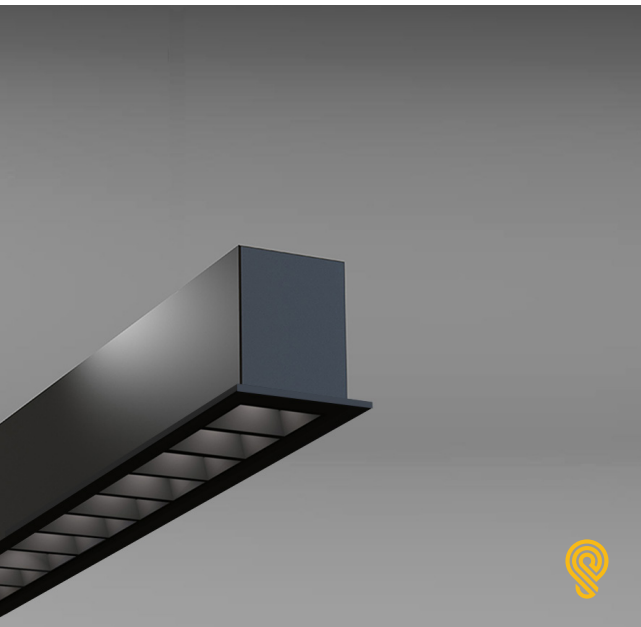

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed installation into Drywall or T-Bar.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ DO
Dark Optic

SIZE

____ ft
1-8 ft
Continuous Run
(1 ft increments)

SOURCE

- ☐ 3 W/ft
☐ 5 W/ft
☐ 8 W/ft

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐
Specify dimming protocol.

MOUNTING

- ☐ RS - Recessed¹
☐ RB - Recessed T-Bar
1. Drywall Ceiling.

BEAM

- ☐ BF - Flood 50°
☐ BW - Wide 80°
☐ BA - Asymmetric

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SG - Gold
☐ SM - Gunmetal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐
Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EM - Emergency Battery Pack²
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth³
☐ JD - JDRF Autonomy Sensor (DA4)³
☐ DOS - Daylight & Occupancy Sensor (DLA)³
☐ AWN - Athena Wireless Node (DLA)³

1. Leave empty.
2. Battery Pack per 4 ft section.
3. Available in sizes 4 ft and up.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
3 W	395 lm	405 lm	415 lm
5 W	660 lm	675 lm	690 lm
8 W	1050 lm	1080 lm	1130 lm



Project:

Type:

SIZE:



CONTINUOUS RUN:



1. L-Total length for Drywall ceiling.

2. L1- Total length for T-Bar ceiling.




3. Extrusion length included filler plate.

4. 1-3 ft, no filler plate requires for Recessed Drywall.


5. 4-8 ft, filler plates at the end.

6. Continuous Run, filler plates in between & at the end.

BEAM:



MOUNTING:

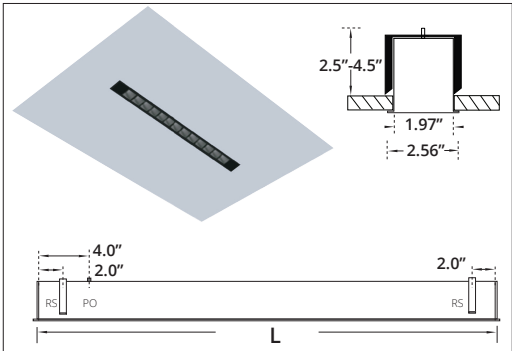


RECESSED

RS - Recessed Bracket
PO - Power Opening

Size	L (Drywall Ceiling)
1 ft	11.34 in
2 ft	22.34 in
3 ft	33.34 in
4 ft	48.22 in
5 ft	59.22 in
6 ft	71.97 in
7 ft	82.97 in
8 ft	95.72 in

1. L is Total length with endcaps for Drywall Ceiling.

2. Cutout Dimensions = Total Length x Width of Extrusion.

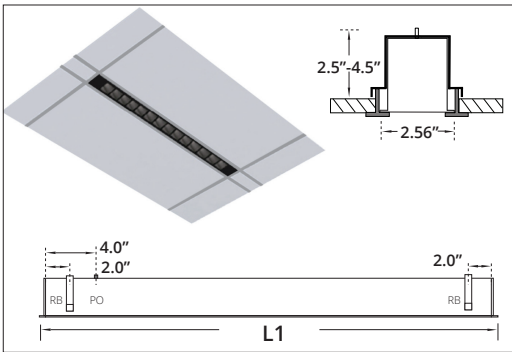

RECESSED T-BAR

RB - Recessed T-BAR Bracket
PO - Power Opening

Size	L1 (T-Bar Ceiling)
1 ft	11.75 in
2 ft	23.75 in
3 ft	35.75 in
4 ft	47.75 in
5 ft	59.75 in
6 ft	71.75 in
7 ft	83.75 in
8 ft	95.75 in

L1 is Total length with endcaps for T-Bar Ceiling.

REFLECTORS:

SQUARE



WHITE



BLACK



GOLD



RED



GUNMETAL