

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED Modular Board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Regular 50°/10UGR, Flood 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for Recessed installation into drywall or T-Bar.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with custom color options.
- ✓ LED's are rated for 60,000hrs. L80 with +90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

ED VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

- | | | | | | |
|--|--|---|---|---|--|
| <p>TYPE</p> <p><input type="checkbox"/> DO - Dark Optic</p> | <p>SIZE</p> <p>_____ Feet*</p> <p style="font-size: x-small;">* 1 Foot increments only.</p> | <p>SOURCE</p> <p><input type="checkbox"/> 5W/Ft LED</p> <p><input type="checkbox"/> 7W/Ft LED</p> <p><input type="checkbox"/> 10W/Ft LED</p> | <p>RADIANCE</p> <p><input type="checkbox"/> DD - Direct (100%Down)</p> <p style="font-size: x-small;">*Light distribution.</p> | <p>VOLTAGE</p> <p><input type="checkbox"/> 120V</p> <p><input type="checkbox"/> 277V</p> <p><input type="checkbox"/> 347V*</p> <p style="font-size: x-small;">*Not available for all configurations.</p> | <p>DRIVER</p> <p><input type="checkbox"/> ST - Standard (Non-Dimming)</p> <p><input type="checkbox"/> DL - 0-10V Dimming (1%)</p> <p><input type="checkbox"/> DA - DALI</p> <p><input type="checkbox"/> BT - Bluetooth</p> <p><input type="checkbox"/> <input type="text"/> *</p> <p><input type="checkbox"/> EC - Emergency Circuit</p> <p><input type="checkbox"/> EM - Emergency**</p> <p style="font-size: x-small;">*Please specify dimming method.
**Battery Pack per 4 foot section.</p> |
|--|--|---|---|---|--|

- | | | | | | |
|--|--|--|--|--|--|
| <p>MOUNTING</p> <p><input type="checkbox"/> RS - Recessed</p> <p><input type="checkbox"/> RB - Recessed T-Bar</p> | <p>REFLECTOR</p> <p>Square:</p> <p><input type="checkbox"/> S/BK - Black</p> <p><input type="checkbox"/> S/WH - White</p> <p><input type="checkbox"/> S/RD - Red</p> <p><input type="checkbox"/> S/SL - Silver</p> <p><input type="checkbox"/> S/GD - Gold</p> <p><input type="checkbox"/> S/GM - Gunmetal</p> <p>Round:</p> <p><input type="checkbox"/> R/BK - Black</p> <p><input type="checkbox"/> R/WH - White</p> <p><input type="checkbox"/> R/RD - Red</p> <p><input type="checkbox"/> R/SL - Silver</p> <p><input type="checkbox"/> R/GD - Gold</p> <p><input type="checkbox"/> R/GM - Gunmetal</p> | <p>LENS</p> <p><input type="checkbox"/> RB - Regular 50°</p> <p><input type="checkbox"/> FB - Flood 80°</p> <p><input type="checkbox"/> AB - Asymmetric</p> | <p>FINISH</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> CF - Custom <input type="text" value="RAL#"/></p> | <p>CCT</p> <p><input type="checkbox"/> 30K/90CRI - 3000Kelvin</p> <p><input type="checkbox"/> 35K/90CRI - 3500Kelvin</p> <p><input type="checkbox"/> 40K/90CRI - 4000Kelvin</p> | <p>OPTIONS</p> <p><input type="checkbox"/> No Options*</p> <p><input type="checkbox"/> DC - Dual Circuit**</p> <p style="font-size: x-small;">*Leave empty.
**Down/Up control separately.</p> |
|--|--|--|--|--|--|

LUMEN OUTPUT W/Ft:



Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm

Project:

Type:

Specifications are subject to change without notice. Every effort has been made for accuracy and errors are unintentional.

SIZE:

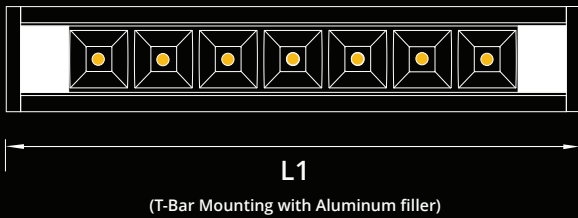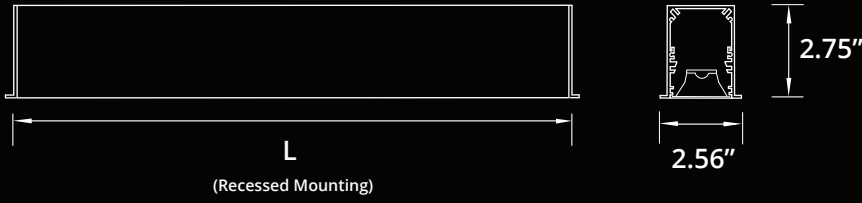


Size	L(CUTOUT)	L1(T-BAR)	LED Strips
1 Feet	11.186 Inch	11.750 Inch	1x11"
2 Feet	22.200 Inch	23.750 Inch	2x11"
3 Feet	33.214 Inch	35.750 Inch	3x11"
4 Feet	44.228 Inch	47.750 Inch	4x11"
5 Feet	55.242 Inch	59.750 Inch	5x11"
6 Feet	66.256 Inch	71.750 Inch	6x11"
7 Feet	77.098 Inch	83.750 Inch	7x11"
8 Feet	88.112 Inch	95.750 Inch	8x11"


RADIANCE:



MOUNTING:

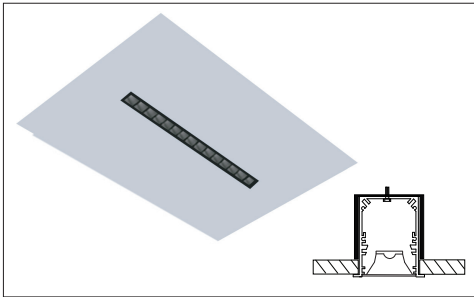

RECESSED

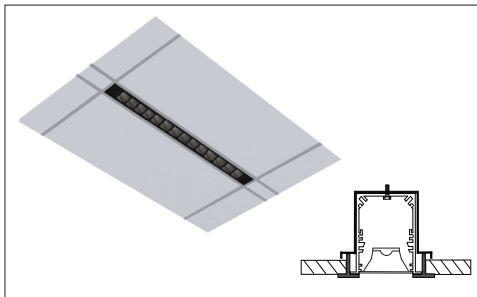

RECESSED T-BAR

REFLECTORS:

SQUARE:



WHITE



SILVER



BLACK



GOLD



RED




GUNMETAL


ROUND:




BEAM:

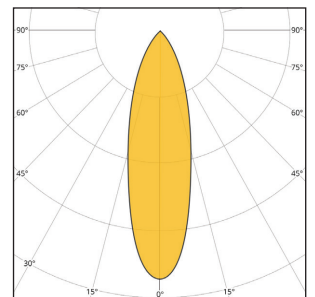

REGULAR BEAM

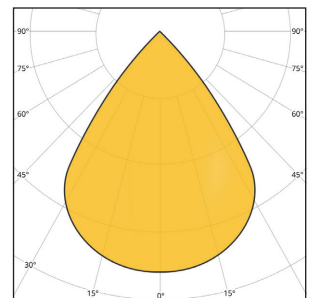

FLOOD BEAM

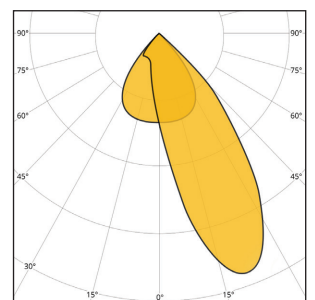

ASYMMETRIC BEAM