


FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum sides with a laser cut metal top enclosure. Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

SIZE

 3 ft

SOURCE

- 20 W
- 30 W
- 40 W

RADIANCE

 DD - Direct

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
-

Specify dimming protocol.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet
- SF - Surface Mount

Specify required Length.

LENS

 OP - Opal

FINISH

- BK - Black¹
- WH - White²
- CF/RAL

 1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
-

 1. Available with DMX or CB.
 2. Available with DL2, DA4 or CB.
 Specify required CCT.

OPTIONS

- No Options¹
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

1. Leave empty.

LUMEN OUTPUT:

Watts	30K	35K	40K
20 W	2070 lm	2125 lm	2180 lm
30 W	3065 lm	3150 lm	3235 lm
40 W	4086 lm	4200 lm	4313 lm



Declare.

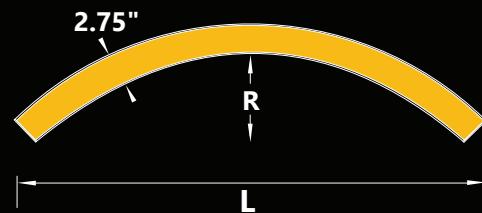
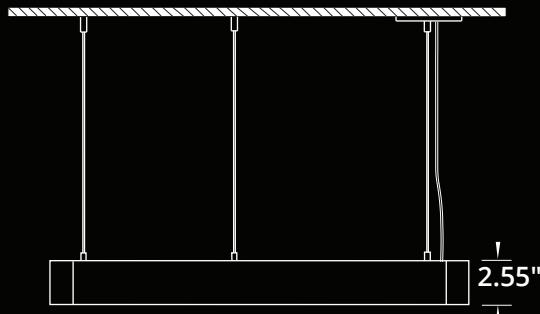
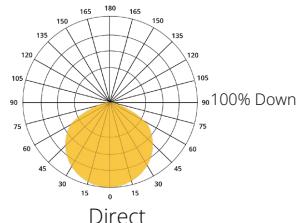
Project:

Type:

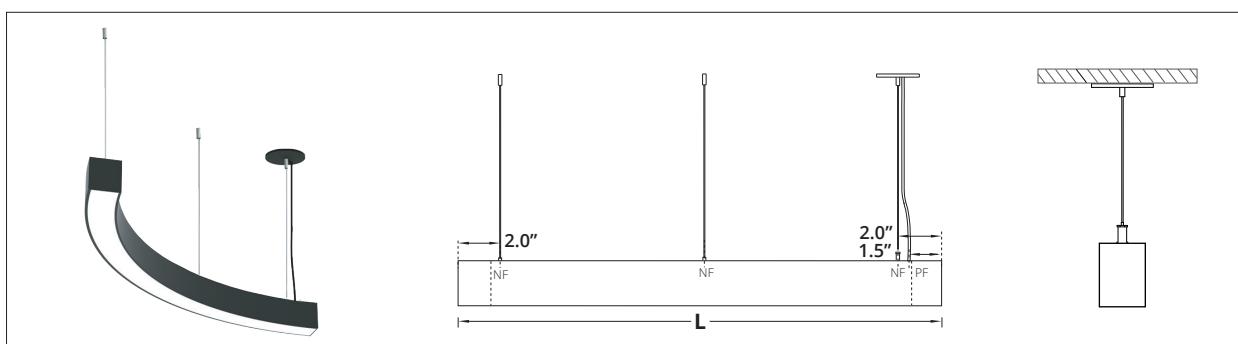
905-830-0339 / 1-800-667-9281

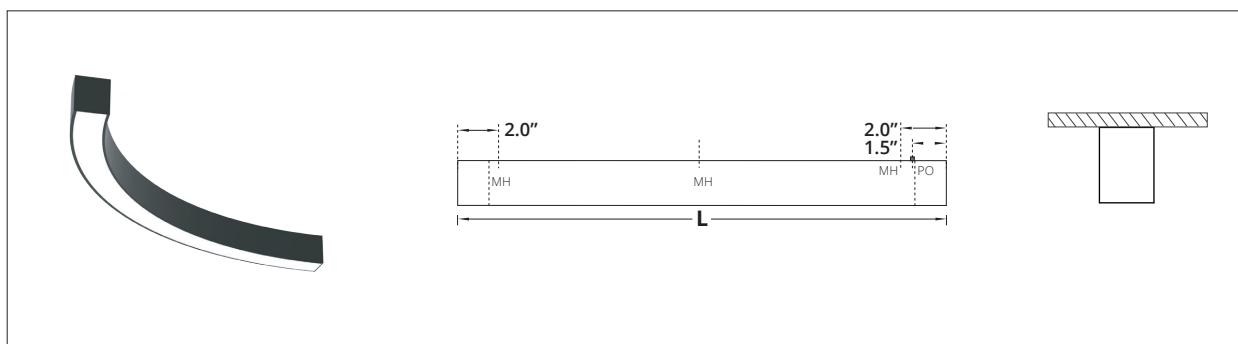
info@edisonlighting.ca

www.edisonlighting.ca


RADIANCE:


Radius	30.00 Inch
Length - L	40.00 Inch


SUSPENDED

 PF - Power Feed
 NF - Non Power Feed

SURFACE MOUNT

 PO - Power Opening
 MH - Mounting Hole