

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED SQUARE+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### TYPE

- ☐ DO - Dark Optic

### SIZE

- ☐  Feet\*  
 \*1-8 Feet Arm length.

### SOURCE

- ☐ 3W/FT LED  
☐ 5W/FT LED  
☐ 8W/FT LED

### RADIANCE

- ☐ DD - Direct (100%Down)  
 \*Light Distribution.

### VOLTAGE

- ☐ 120V  
☐ 277V  
☐ 347V\*  
 \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DA4 - DALI D4i  
☐  \*  
 \*Specify dimming protocol.

### MOUNTING

- ☐ S6W - 6Ft Cord WH\*  
☐ S6B - 6Ft Cord BK\*  
☐ S  Feet\*\*  
☐ WF - Wall Flush  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless

\*Canopy will match the Cord color.  
 \*\*Specify Suspension length and color.

### BEAM

- ☐ FB - Flood 50°  
☐ WF - Wide Flood 80°

### REFLECTOR

- ☐ SB - Black  
☐ SW - White  
☐ SR - Red  
☐ SL - Silver  
☐ SG - Gold  
☐ SM - Gunmetal

### FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL  \*\*\*  
 \*RAL 9005  
 \*\*RAL 9016  
 \*\*\*Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐  \*  
 \*Specify required CCT.

### OPTIONS

- ☐ No Options\*  
☐ CB - Casambi/Bluetooth  
☐  \*\*  
 \*Leave empty.  
 \*\*Specify required option.

## LUMEN OUTPUT W/Ft:



Watts	30K	35K	40K
3W	395 lm	405 lm	415 lm
5W	660 lm	675 lm	690 lm
8W	1050 lm	1080 lm	1130 lm



Project:

Type:

SIZE:

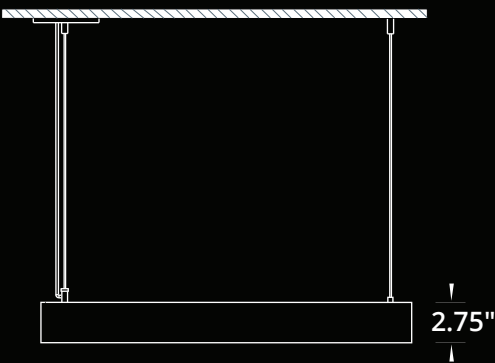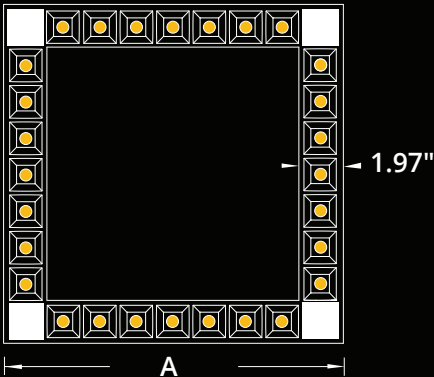


Size	A
1 Feet	15.50 Inch
2 Feet	26.50 Inch
3 Feet	37.50 Inch
4 Feet	48.50 Inch
5 Feet	59.50 Inch
6 Feet	70.50 Inch
7 Feet	81.50 Inch
8 Feet	92.50 Inch

A - Arm Length  
 \*Arm Length includes the filler plate.


RADIANCE:



MOUNTING:

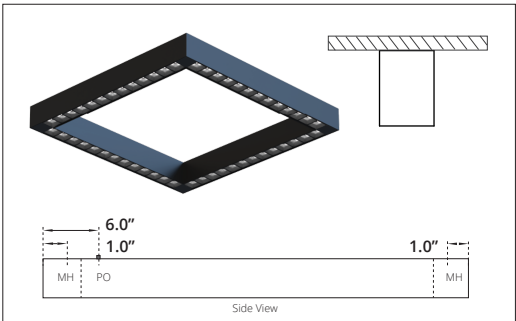


**SURFACE MOUNT**  
 MH - Mounting Hole  
 PO - Power Opening

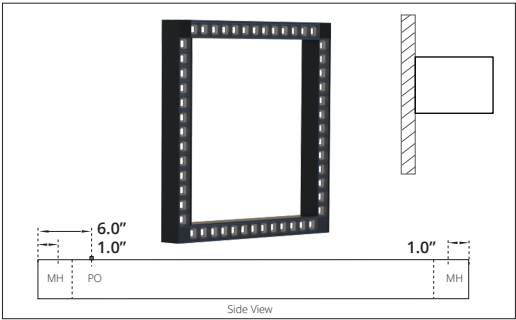

**WALL FLUSH**  
 MH - Mounting Hole  
 PO - Power Opening

BEAM ANGLE:

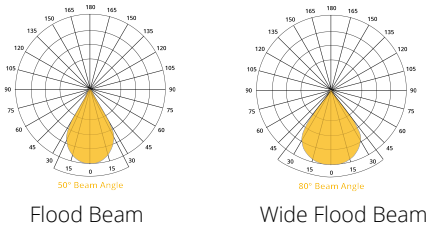

REFLECTORS:



WHITE



SILVER



BLACK




GOLD




RED



GUNMETAL

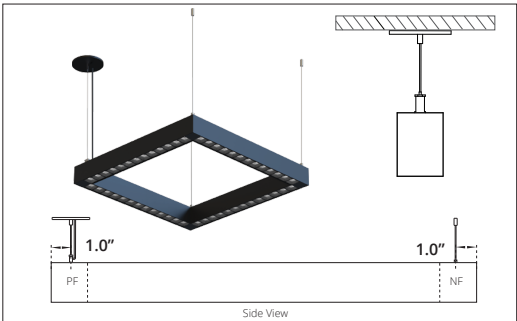

**SUSPENDED**  
 PF - Power Feed  
 NF - Non Power Feed

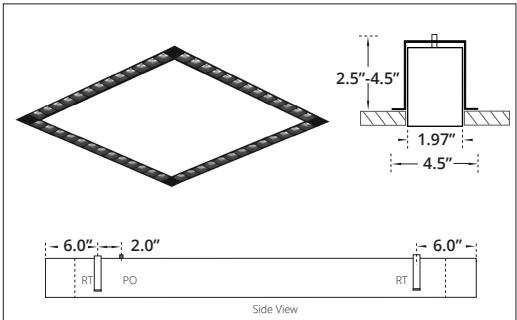

**RECESSED TRIMLESS**  
 RT - Recessed Trimless Bracket  
 PO - Power Opening  
 \*Cutout Dimensions = Total Length x Width of Extrusion.