



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector comes in following beam angles: Narrow 10°, Medium 25° and Flood 40°.
- ✓ Adjustable trim assembly can be tilted up to 25° in both directions.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed non insulated ceilings and dry locations.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TS+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	TRIM	CCT

Enter the Product Code into the boxes above.

SIZE

- ☐ 1x-Single
- ☐ 2x-Double
- ☐ 3x-Triple

SOURCE

- ☐ 10W LED
- ☐ 15W LED
- ☐ 20W LED

RADIANCE

- ☐ DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - Standard (Non-Dimming)
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA4 - DALI D4i
- ☐ *

* Please specify dimming method.

MOUNTING

- ☐ RT - Retrofit
- ☐ NC - New Const. Plate

BEAM

- ☐ BN - Narrow 10°
- ☐ BM - Medium 25°
- ☐ BF - Flood 40°

TRIM

- ☐ WH - White
- ☐ BK - Black
- ☐ GR - Grey

CCT

- ☐ 30K/90CRI - 3000 Kelvin
- ☐ 35K/90CRI - 3500 Kelvin
- ☐ 40K/90CRI - 4000 Kelvin
- ☐ *


*Specify required CCT.

DIMENSIONS:

Size	Height	Width	Length	Cut Out
Single	5.938"	7.09"	7.09"	6.25"x6.25"
Double	5.938"	7.09"	14.17"	6.25"x12.25"
Triple	5.938"	7.09"	21.26"	6.25"x20.25"

LUMEN OUTPUT:

Watts	30K	35K	40K
10W	1050 lm	1070 lm	1090 lm
15W	1570 lm	1605 lm	1640 lm
20W	2090 lm	2145 lm	2200lm

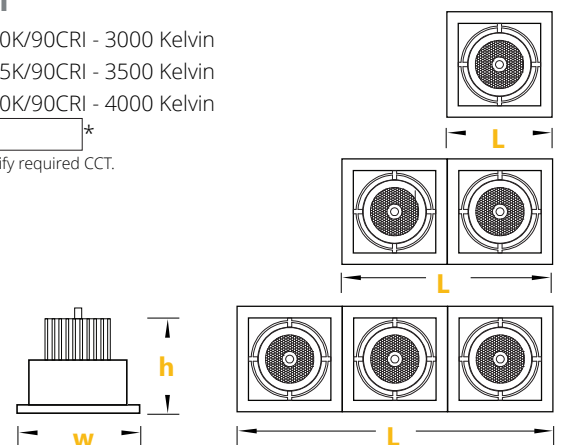

Project:

Type: