


- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by high efficiency opal lenses.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed applications in drywall or T-Bar ceilings.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

**ED VECTOR4+** SIZE SOURCE RADIANCE VOLTAGE DRIVER MOUNTING LENS FINISH CCT OPTION

Specifications are subject to change without notice. Every effort has been made for accuracy, and errors are unintentional.


SIZE:

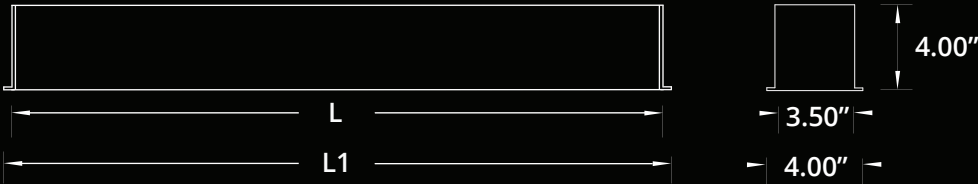


Size	L(Extrusion)	L1(T-BAR)
1 Ft	11.50 In	11.75 In
2 Ft	24.25 In	23.75 In
3 Ft	35.25 In	35.75 In
4 Ft	48.00 In	47.75 In
5 Ft	59.00 In	59.75 In
6 Ft	71.75 In	71.75 In
7 Ft	82.75 In	83.75 In
8 Ft	95.50 In	95.75 In

\*Total length with endcaps = L + 0.22"  
\*\*Total length with endcaps for Recessed installation.  
\*\*\*L1 is total length with trim for T-Bar installation.


CONTINUOUS RUN:



RADIANCE:




MOUNTING:

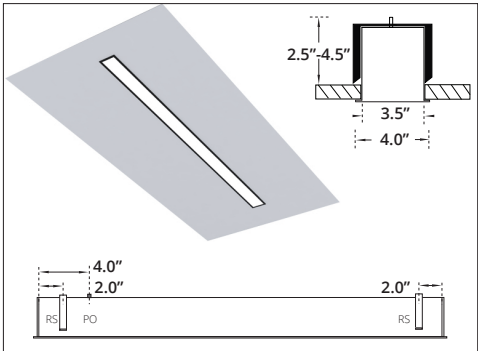


RECESSED

RS - Recessed Bracket  
PO - Power Opening  
\*Cutout Dimensions = Total Length x Width of Extrusion.

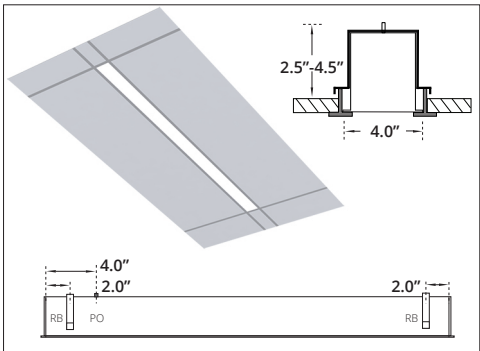


RECESSED T-BAR

RB - Recessed T-Bar Bracket  
PO - Power Opening

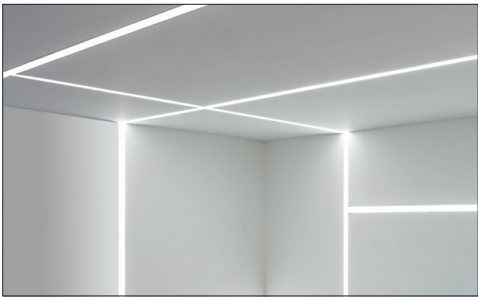

90° IN (WALL TO CEILING)

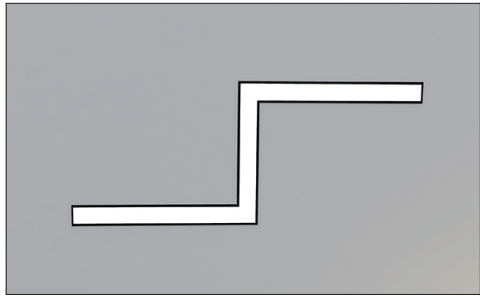

VARIABLE ANGLE  
60°, 90°, 120°, 135° or Custom.