

FEATURES:

- ✓ Architectural acoustic luminaire with direct/indirect lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED Boards.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with built-in-driver and available in black or white finish.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above

TYPE

- ☐ FR - Flush Regular
- ☐ FV - Flush V-Cut
- ☐ FS - Square Edge
- ☐ FC - Curved Edge

HEIGHT

- ☐ 12 in
- ☐ 16 in
- ☐ 24 in

SIZE

- ☐ 4 ft
 - ☐ 6 ft
 - ☐ 8 ft
 - ☐
- Specify custom size.

SOURCE

- ☐ 5 W/ft
- ☐ 7 W/ft
- ☐ 10 W/ft

RADIANCE

- ☐ DD - Direct¹
 - ☐ ID - Indirect²
 - ☐ UD - Uneven³
1. 100%Down
2. 100%Up
3. 70%Down/30%Up

VOLTAGE

- ☐ UNV - 120/277V
 - ☐ 347V¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DLA - 0-10V Dim (Aux)
- ☐ DA4 - DALI D4i
- ☐

Specify dimming protocol.

MOUNTING

- ☐ S6B - 6 ft Cord BK¹
 - ☐ S6W - 6 ft Cord WH¹
 - ☐ S ft²
1. Canopy match the Cord Color
2. Specify Suspension Length/color.

LENS

- ☐ OP - Opal

ED VECTOR+ FINISH

- ☐ BK - Black¹
 - ☐ WH - White²
1. RAL 9005
2. RAL 9016


CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW¹
- ☐ TW - Tunable White (27K-65K)²
- ☐

1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

ACOUSTIC FINISH

Please specify additional colour for Two-Tone.

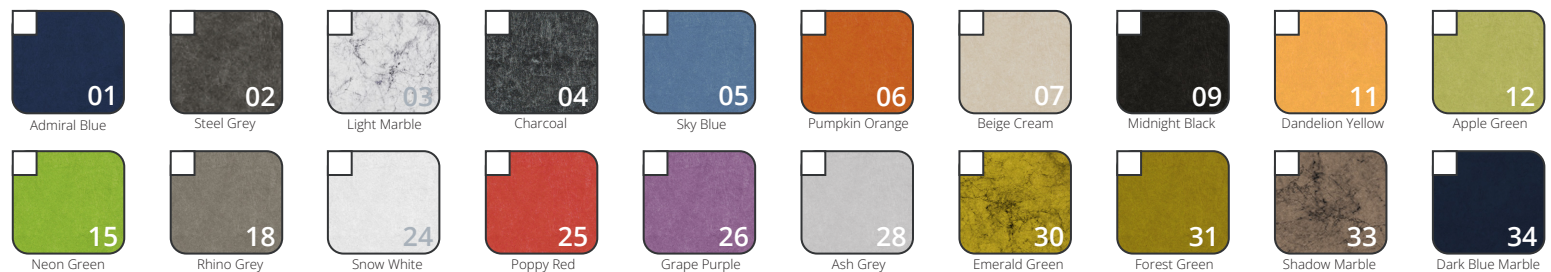

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:




Type:

SIZE:




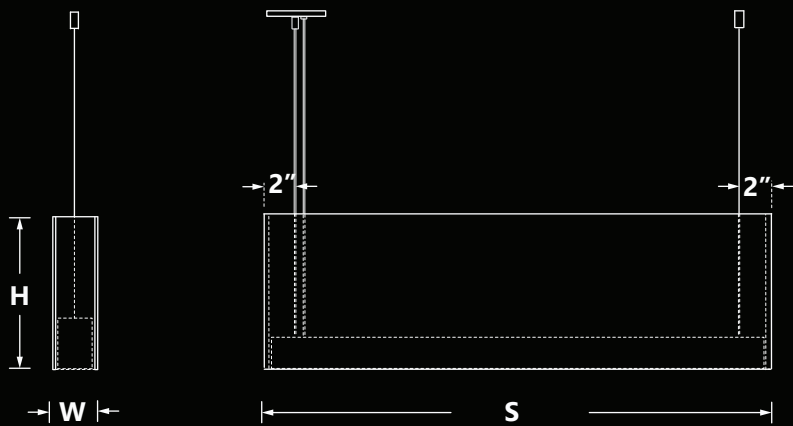


W-Width	3.00 in
H-Height	S-Size
12 in = 11.75 in	4 ft = 47.75 in
16 in = 15.75 in	6 ft = 71.75 in
24 in = 23.75 in	8 ft = 95.75 in


RADIANCE:

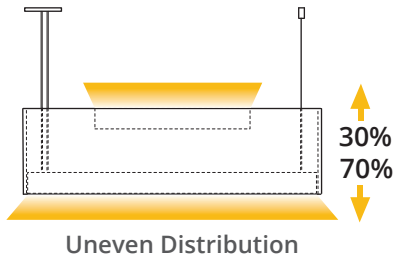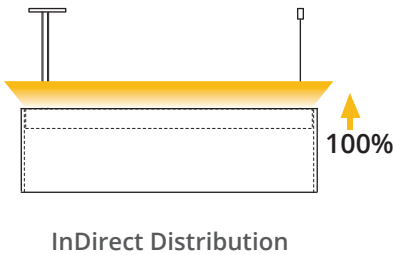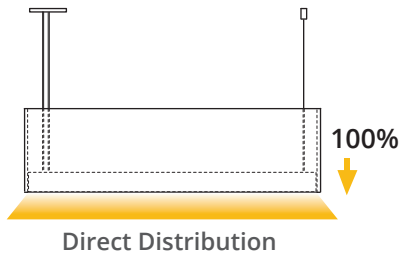


TYPE:

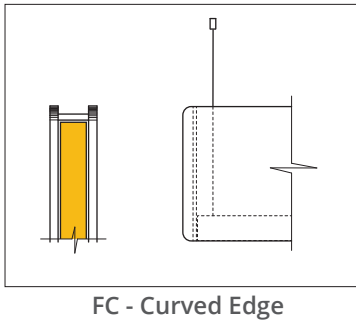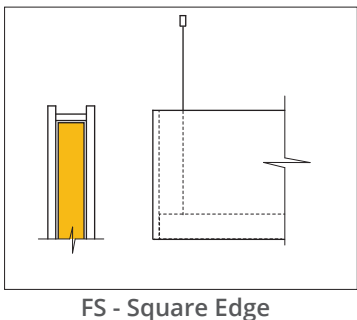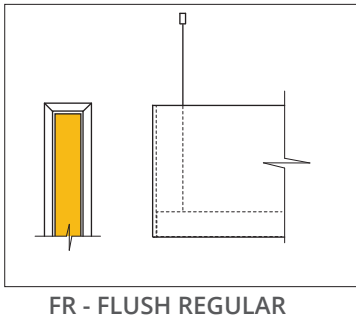


FR - Regular
#04

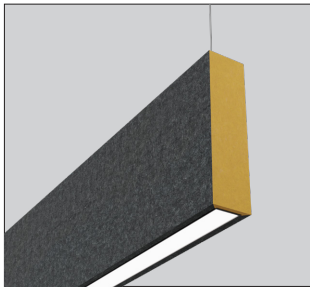

FR - Two-Tone
#04/#11

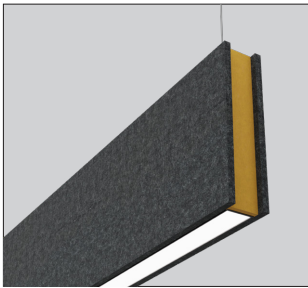

FS - Square Edge
#04/#11

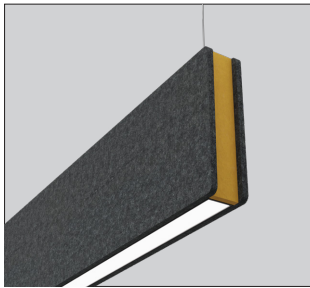

FC - Curved Edge
#04/#11