

## FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**Sonic VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above

### TYPE

- TS - Trapezoid

### HEIGHT

- 16 in
- 18 in
- 24 in

### SIZE

- 30 in
- 40 in
- 50 in

### SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

### RADIANCE

- DD - Direct<sup>1</sup>
  - UD - Uneven<sup>2</sup>
1. 100%Down  
2. 70%Down/30%Up

### VOLTAGE

- UNV - 120/277V
  - 347V<sup>1</sup>
1. Verify availability.

### DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- CV - Constant Voltage (RGBW)
- 

Specify dimming protocol.

### MOUNTING

- S6B - 6 ft Cord BK<sup>1</sup>
  - S6W - 6 ft Cord WH<sup>1</sup>
  - S  ft<sup>2</sup>
1. Canopy match the Cord Color  
2. Specify Suspension Length/color.

### LENS

- OP - Opal

### ED VECTOR+ FINISH

- BK - Black<sup>1</sup>
  - WH - White<sup>2</sup>
1. RAL 9005  
2. RAL 9016

### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

1. Available with CV.  
2. Available with DL2.  
Specify required CCT.

## ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 04/11.



## LUMEN OUTPUT W/ft:

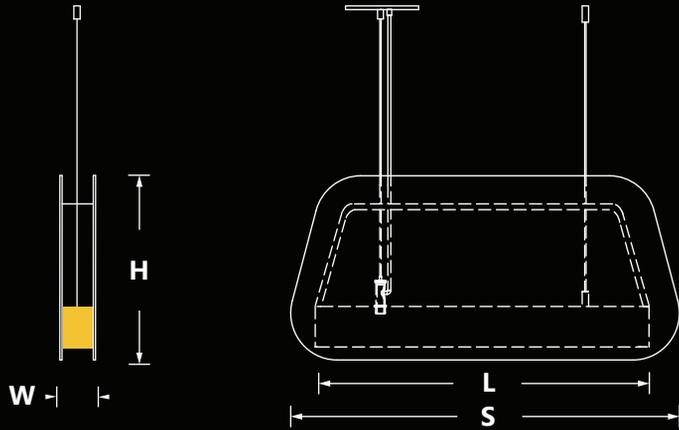
Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Declare.

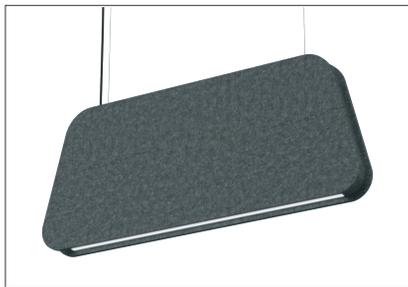
Project:

Type:

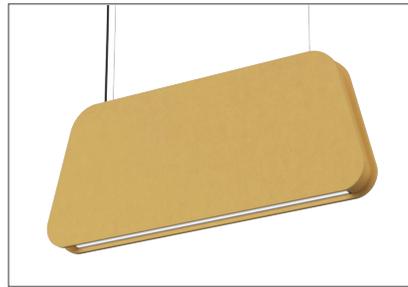
**SIZE:**


W - Width	H - Height
2.75 in	16 in = 15.75 in
	18 in = 17.75 in
	24 in = 23.75 in
S-Size	L - Luminaire Length
30 in	22.80 in
40 in	33.80 in
50 in	44.80 in

**RADIANCE:**

**FINISHES:**
**Regular**


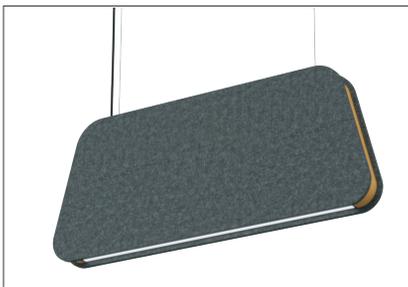
04



11



28

**Two-Tone**


04/11



11/04



28/04