



## FEATURES:

- ✓ Architectural sound-absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 fire-rated with 0.7 Noise Reduction Coefficient for 1" acoustic.
- ✓ Light source: COB LED.
- ✓ A high-efficiency integral louver combined with an opal lens insert provides excellent lighting distribution.
- ✓ A circular internal louver is available in a black or white finish.
- ✓ The aluminum body of the luminaire comes with a built-in driver.
- ✓ The LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial, and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

**Sonic TUBE+**  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### TYPE

- CS - Cylinder

### HEIGHT

- 12 in
- 16 in
- 24 in

### SOURCE

- 15 W
- 20 W
- 25 W

### RADIANCE

- DD - Direct

### VOLTAGE

- UNV - 120/277V

### DRIVER

- ST - On/Off
  - DL - 0-10V Dim (1%)
  - DA4 - DALI D4i
  -
- Specify dimming protocol.

### MOUNTING

- S6B - 6 ft Cord BK<sup>1</sup>
  - S6W - 6 ft Cord WH<sup>1</sup>
  - S  ft<sup>2</sup>
1. Canopy match the Cord color  
2. Specify Suspension length and color.

### LOUVER

- LB - Black
- LW - White

### ED TUBE+ FINISH

- BK - Black<sup>1</sup>
  - WH - White<sup>2</sup>
1. RAL 9005  
2. RAL 9003

### CCT

- 30K - 3000 Kelvin/90CRI
  - 35K - 3500 Kelvin/90CRI
  - 40K - 4000 Kelvin/90CRI
  -
- Specify required CCT.

## ACOUSTIC FINISH

Specify Acoustic Body & Bottom Layer, For example (11/04)



## LUMEN OUTPUT:

Watts	30K	35K	40K
15 W	1400 lm	1430 lm	1460 lm
20 W	1910 lm	1950 lm	1990 lm
25 W	2350 lm	2400 lm	2450 lm




Declare.

Project:

Type:

**SIZE:**

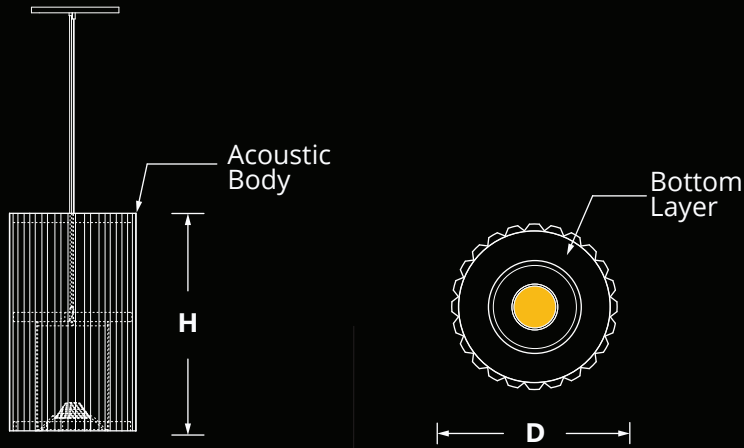

H - Height	Diameter
12 in = 11.75 in	8.00 in
16 in = 15.75 in	8.00 in
24 in = 23.75 in	8.00 in

**FINISHES:**



11/04



05/04



25/04



26/04



03/04



01/04



09/25



12/24