


FEATURES:

- ✓ Architectural floor luminaire with direct/indirect distribution.
- ✓ Light source: 11" LED board (direct) and 22" LED board (indirect).
- ✓ Direct lighting is distributed by Dark Optic with precise, low glare illumination.
- ✓ 7 cell LEDiL reflector is available in several standard finishes.
- ✓ Offered with regular 50°/16UGR and flood 80°/19UGR internal optic.
- ✓ Controlled by on/off switch or optional Casambi Bluetooth dimming module.
- ✓ Extruded aluminum body comes in black or white finish.
- ✓ Comes with standard 8 foot plug-in cord.
- ✓ LEDs are rated for 60,000hrs. L80 with +90CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:

ED VECTOR+

TYPE	SOURCE	RADIANCE	VOLTAGE	DRIVER	REFLECTOR	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

TYPE
☐ FL - Floor Lamp

SOURCE
☐ 20W LED
☐ 30W LED

RADIANCE
☐ DI - Direct/Indirect

VOLTAGE
☐ 120V

DRIVER
☐ ST - Standard*
☐ DL - 0-10V Dimming**
☐ ***

*On/off switch.
 **Casambi Bluetooth.
 ***Please specify dimming method

REFLECTOR
☐ WH - White
☐ BK - Black
☐ SL - Silver

LENS
☐ RB - Regular 50°
☐ FB - Floor 80°

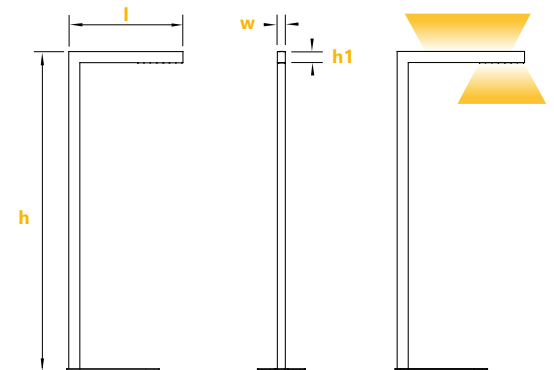
FINISH
☐ BK - Black
☐ WH - White

CCT
☐ 30K - 3000Kelvin/90CRI
☐ 35K - 3500Kelvin/90CRI
☐ 40K - 4000Kelvin/90CRI

*Other options are available.

OPTIONS
☐ No Options*
☐ DC - Dual Circuit**

*Leave empty.
 **Control down/up separately.


DIMENSIONS:

Length	Width	Height	Height 1	Base Plate
27.75"	2.00"	79.00"	2.75"	12.00" x 22.88"

LUMEN OUTPUT:

Watts	30K	35K	40K
20W	2295 lm	2340 lm	2385 lm
30W	3340 lm	3510 lm	3580 lm



Project:

Type: