



FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ Also available with custom colour options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic DRUM+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐
- BS - Bell

HEIGHT

- ☐
- 12 in
-
- ☐
- 16 in
-
- ☐
- 24 in

SIZE

- ☐
- 30 in

SOURCE

- ☐
- 25W
-
- ☐
- 50W

RADIANCE

- ☐
- DD - Direct

VOLTAGE

- ☐
- UNV - 120/277V
-
- ☐
- 347V
- ¹
-
1. Verify availability.

DRIVER

- ☐
- ST - On/Off
-
- ☐
- DL - 0-10V Dim (1%)
-
- ☐
- DLO - 0-10V Dim (to Off)
-
- ☐
- DL2 - 0-10V Dim (TW)
-
- ☐
- CV - Constant Voltage (RGBW)
-
- ☐
-

Specify dimming protocol.

MOUNTING

- ☐
- S6B - 6ft Cord BK
- ¹
-
- ☐
- S6W - 6ft Cord WH
- ¹
-
- ☐
- S
-
- ft
- ²
-
1. Canopy match the Cord color.
-
2. Specify Suspension length/color.

LENS

- ☐
- OP - Opal

ED DRUM+ FINISH

- ☐
- BK - Black
- ¹
-
- ☐
- WH - White
- ²
-
1. RAL 9005
-
2. RAL 9003

CCT

- ☐
- 30K - 3000 Kelvin/90CRI
-
- ☐
- 35K - 3500 Kelvin/90CRI
-
- ☐
- 40K - 4000 Kelvin/90CRI
-
- ☐
- RGBW
- ¹
-
- ☐
- TW - Tunable White (27K-65K)
- ²
-
- ☐
-

 1. Available with CV.
 2. Available with DL2.
 Specify required CCT.

ACOUSTIC FINISH

Please specify Outside Acoustic & Inside Wool Felt Layer, for example (04/121)



WOOL FELT FINISH



LUMEN OUTPUT:


Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm



Project:

Type:

SIZE:

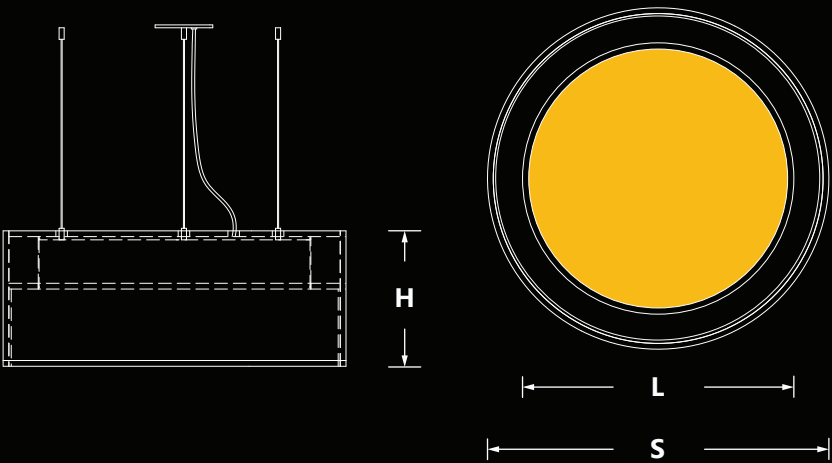

H - Height	S- Size (Diameter)
12 in = 11.75 in	30 in = 29.75 in
16 in = 15.75 in	L- Luminaire
24 in = 23.75 in	23.75 in

FINISHES:

