



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Available with Spot 25°, Flood 45° and Wide Flood 60° beam angle.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for suspended installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED PIPE+ — — — — — — — —

Enter the Product Code into the boxes above.

SOURCE

- 10W LED
- 15W LED
- 20W LED

RADIANCE

- DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- 120V
- 277V

DRIVER

- ST - Standard (Non-Dimming)
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - BT - Bluetooth
 - *
- * Please specify dimming method.

MOUNTING

- S4 - Suspension 4Feet
 - S6 - Suspension 6Feet
 - S Feet*
- * Please specify required Length.

REFLECTOR


- SP - Spot
- FL - Flood
- WF - Wide Flood

FINISH

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K/90CRI - 3000Kelvin
 - 35K/90CRI - 3500Kelvin
 - 40K/90CRI - 4000Kelvin
- *Other options are available.

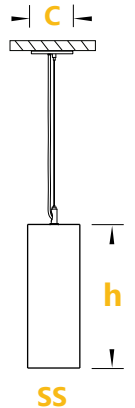

DIMENSIONS:

Width	Height	Canopy
4.0"	11.0"	5.0"

LUMEN OUTPUT:

Watts	30K	35K	40K
10W	930 lm	950 lm	990 lm
15W	1395 lm	1425 lm	1475 lm
20W	1860 lm	1900 lm	1940 lm



Project:

Type: