




FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency opal inserted or optional low glare microprismatic lens.
- ✓ Suitable for suspended and row mounted installations.
- ✓ Fixture body with integrated driver is made from light weight steel.
- ✓ Available with matt white, black or grey finish.
- ✓ LED Strips are rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial applications.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:



Enter the Product Code into the boxes above.

SOURCE

- 35W LED
- 45W LED

RADIANCE

- DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- *

*Please specify dimming method.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- SF - Surface Mount

*Please specify required Length.

LENS

- OP - Opal
- PR - Prismatic

FINISH

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- RGBW*
- TW - Tunable White**
(2700K-6500K)

*Available with Dali, DMX or Bluetooth controls.
**Available with 0-10V,Dali or Bluetooth controls.

OPTIONS

- DOS - Daylight & Occupancy Sensor*
- BIOS


*With compatible DALI driver.

DIMENSIONS:

Length	Width	Depth
47.25"	7.125"	2.250"

LUMEN OUTPUT:

Watts	30K	35K	40K
35W	3420lm	3500 lm	3580 lm
45W	4400 lm	4500 lm	4600 lm

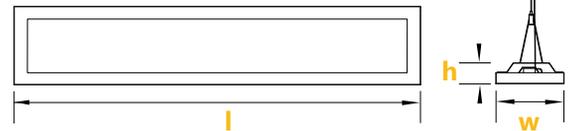

Project: _____

Type: _____