

### FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency optic lenses.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

ED TRIANGLE+  —  —  —  —  —  —  —  —  —

Enter the order code into the boxes above.

#### SIZE

- ☐  Feet\*
- \*1-8 Feet Arm length.

#### SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

#### RADIANCE

- ☐ DD - Direct (100%Down)
- \*Light Distribution.

#### VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V\*
- \*Not available for all configurations.

#### DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DL2 - 0-10V Dimming (2 Channels)
- ☐ DA4 - DALI D4i
- ☐ DMX - DMX RGBW
- ☐ \*
- \*Specify dimming protocol.

#### MOUNTING

- ☐ S6W - 6Ft Cord WH\*
- ☐ S6B - 6Ft Cord BK\*
- ☐ S  Feet\*\*
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless
- \*Canopy will match the Cord color.
- \*\*Specify Suspension length and color.

#### LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

#### FINISH

- ☐ BK - Black\*
- ☐ WH - White\*\*
- ☐ CF/RAL \*\*\*
- \*RAL 9005
- \*\*RAL 9016
- \*\*\*Specify required RAL number.

#### CCT

- ☐ 30K/90CRI - 3000 Kelvin
- ☐ 35K/90CRI - 3500 Kelvin
- ☐ 40K/90CRI - 4000 Kelvin
- ☐ RGBW
- ☐ TW - Tunable White\* (2700K-6500K)
- ☐ \*\*
- \*Available with 0-10V, Dali or Bluetooth controls.
- \*\*Specify required CCT.

#### OPTIONS

- ☐ No Options\*
- ☐ DR - Damp Rated
- ☐ CB - Casambi/Bluetooth
- ☐ \*\*
- \*Leave empty.
- \*\*Specify required option.

### LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm




Declare.

Project:

Type:

SIZE:

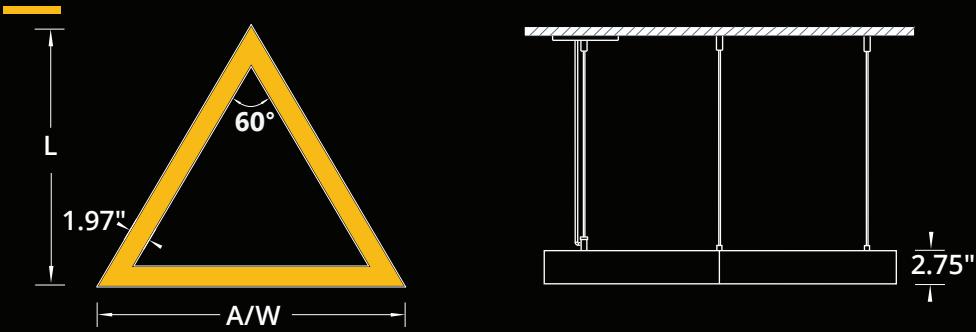


Size	A	L x W
1 Feet	15.11	13.01 x 15.11
2 Feet	27.59	24.13 x 27.60
3 Feet	38.86	33.65 x 38.86
4 Feet	51.61	44.70 x 51.61
5 Feet	62.61	54.22 x 62.61
6 Feet	75.36	65.26 x 75.36
7 Feet	86.36	74.80 x 86.36
8 Feet	99.11	85.83 x 99.11

A - Arm Length  
L - Total Length  
W - Total Width  
\*All dimensions are in Inches.


RADIANCE:




MOUNTING:

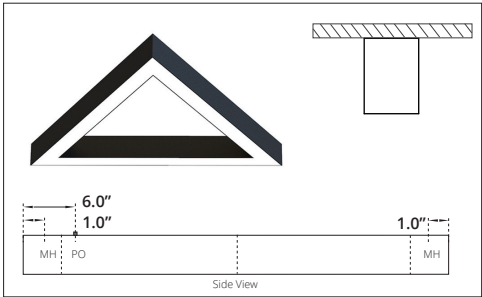


**SURFACE MOUNT**  
MH - Mounting Hole  
PO - Power Opening

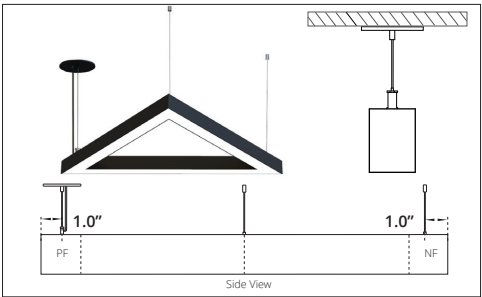

**SUSPENDED**  
PF - Power Feed  
NF - Non Power Feed

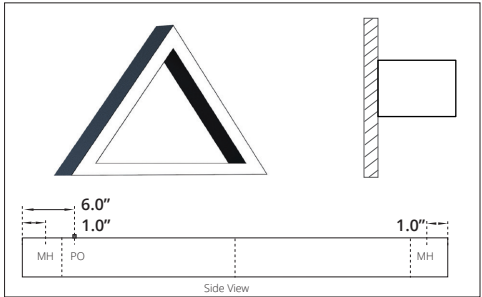

**WALL FLUSH**  
MH - Mounting Hole  
PO - Power Opening

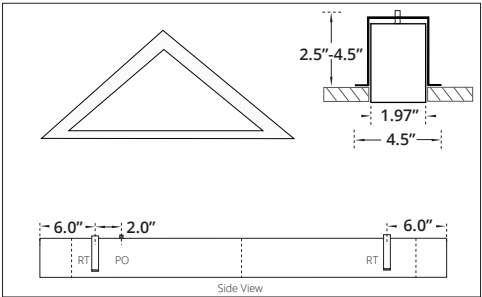

**RECESSED TRIMLESS**  
RT - Recessed Trimless Bracket  
PO - Power Opening  
\*Cutout Dimensions = Total Length x Width of Extrusion.