



### FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution with 40° Beam.
- ✓ Circular internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Available in black or white finish.
- ✓ Suitable for surface mounted and suspended installations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

### SPECIFICATION:

**ED TUBE+**

SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LOUVER	FINISH	CCT

Enter the Product Code into the boxes above.

#### SOURCE

- ☐ 15W LED
- ☐ 20W LED
- ☐ 25W LED

#### RADIANCE

- ☐ DD - Direct (100%Down)  
\*Light Distribution.

#### VOLTAGE

- ☐ 120V
- ☐ 277V

#### DRIVER

- ☐ ST - Standard (Non-Dimming)
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐  \*

\*Please specify dimming method.

#### MOUNTING

- ☐ SF - Surface Mount
- ☐ S4 - Suspension 4Feet
- ☐ S6 - Suspension 6Feet
- ☐ S  Feet\*
- ☐ R2 - Stem 2Feet
- ☐ R3 - Stem 3Feet
- ☐ R  Feet\*

\* Please specify required Length.

#### LOUVER

- ☐ WH - White
- ☐ BK - Black
- ☐ SL - Silver

#### FINISH

- ☐ BK - Black
- ☐ WH - White

#### CCT

- ☐ 30K - 3000Kelvin/90CRI
- ☐ 35K - 3500Kelvin/90CRI
- ☐ 40K - 4000Kelvin/90CRI


\*Other options are available.

### DIMENSIONS:

Width	Height
4.5"	6.0"

### LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

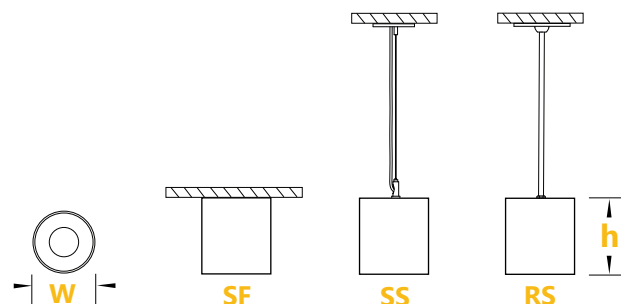

Project:

Type: