

## FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with Narrow 15°, Medium 25° or Flood 40° Beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED AR+**  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

### SOURCE

- ☐ 8W LED
- ☐ 12W LED

### RADIANCE

- ☐ DD - Direct (100%Down)
- \*Light Distribution.

### VOLTAGE

- ☐ 120V
  - ☐ 277V
  - ☐ 347V\*
- \*External step down transformer per luminaire.

### DRIVER

- ☐ ST - Standard (Non-Dimming)
  - ☐ DL - 0-10V Dimming (1%)
  - ☐ DA4 - DALI D4i
  - ☐  \*
- \* Please specify dimming method.

### MOUNTING


- ☐ RT -Retrofit
- ☐ NC- New Const. Plate

### BEAM

- ☐ BN - Narrow 15°
- ☐ BM - Medium 25°
- ☐ BF - Flood 40°

### REFLECTOR

- ☐ WH - White
- ☐ BK - Black
- ☐ SL - Silver
- ☐ CH - Chrome
- ☐ CD - Chrome Dark
- ☐ CG - Chrome Gold

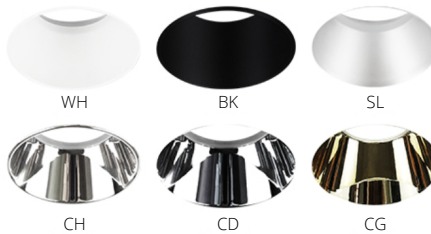

### TRIM

- ☐ WH - White
- ☐ BK - Black

### CCT


- ☐ 30K/90CRI - 3000 Kelvin
  - ☐ 35K/90CRI - 3500 Kelvin
  - ☐ 40K/90CRI - 4000 Kelvin
  - ☐  \*
- \*Specify required CCT.

## DIMENSIONS:

Height	Width	Cut Out
3.625"	3.36"	2.937"

## LUMEN OUTPUT:

Watts	30K	35K	40K
8W	700 lm	720 lm	740 lm
12W	1050 lm	1080 lm	1110 lm

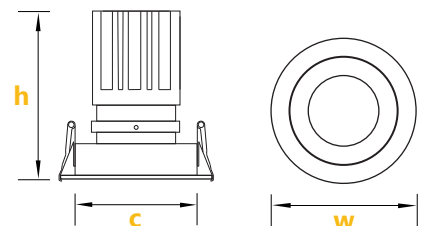

Project:

Type: