

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed installation into drywall or T-Bar.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ DO - Dark Optic

SIZE

_____ Feet*
 * 1 Foot increments only.

SOURCE

- ☐ 5W/FT LED
☐ 7W/FT LED
☐ 10W/FT LED

RADIANCE

- ☐ DD - Direct (100%Down)
 *Light distribution.

VOLTAGE

- ☐ 120V
☐ 277V
☐ 347V*
 *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dimming (1%)
☐ DLO - 0-10V Dimming (to Off)
☐ DA4 - DALI D4i
☐ EM - Emergency Driver*
☐ **
 *Battery Pack min. 4Feet section.
 **Specify dimming protocol.

MOUNTING

- ☐ RS - Recessed
☐ RB - Recessed T-Bar

BEAM

- ☐ BF - Flood 50°
☐ BW - Wide 80°
☐ BA - Asymmetric

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SL - Silver
☐ SG - Gold
☐ SM - Gunmetal

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
 *RAL 9005
 **RAL 9016
 ***Specify required RAL number.

CCT

- ☐ 30K/90CRI - 3000 Kelvin
☐ 35K/90CRI - 3500 Kelvin
☐ 40K/90CRI - 4000 Kelvin
☐ *
 *Specify required CCT.

OPTIONS

- ☐ No Options*
☐ CB - Casambi/Bluetooth
☐ **
 *Leave empty.
 **Specify required option.

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm



Project:

Type:

SIZE:

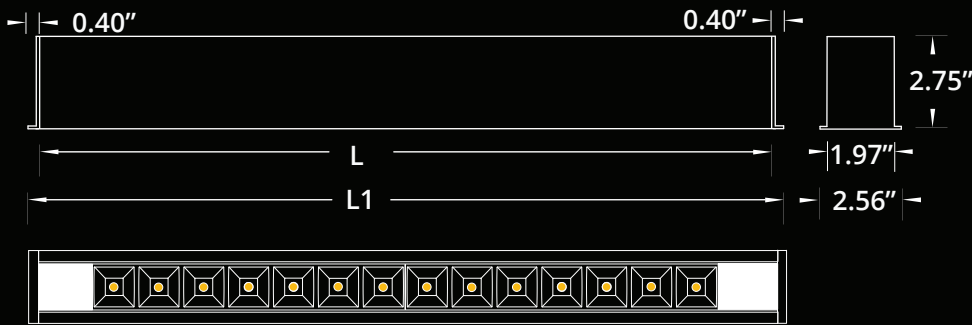

CONTINUOUS RUN:



Size	L	L1(T-BAR)
1 Feet	11.12 Inch	11.75 Inch
2 Feet	22.12 Inch	23.75 Inch
3 Feet	33.12 Inch	35.75 Inch
4 Feet	48.00 Inch	47.75 Inch
5 Feet	59.00 Inch	59.75 Inch
6 Feet	71.75 Inch	71.75 Inch
7 Feet	82.75 Inch	83.75 Inch
8 Feet	95.50 Inch	95.75 Inch

Total length with endcaps = $L + 0.22$ "

*Extrusion length included filler plate.

**1-3 Feet, no filler plate requires.

***4-8 Feet, filler plates at the end.


****Continuous Run, filler plates in between & at the end.

*****For T-Bar installation with filler plates, L1 is the entire length with trim.

RADIANCE:



MOUNTING:

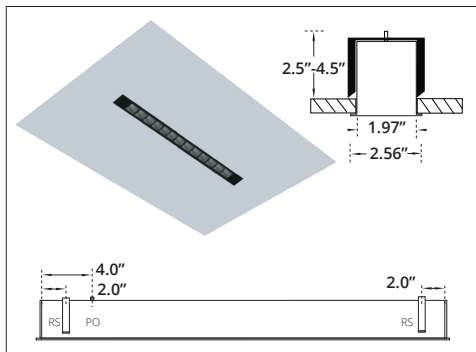


RECESSED

RS - Recessed Bracket

PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.

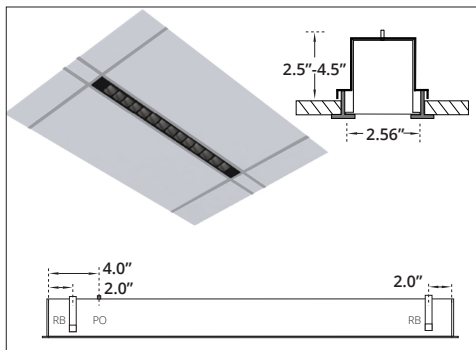


RECESSED T-BAR


RB - Recessed T-BAR Bracket

PO - Power Opening


BEAM:

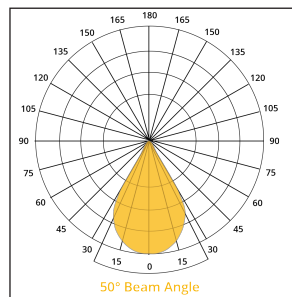

FLOOD BEAM

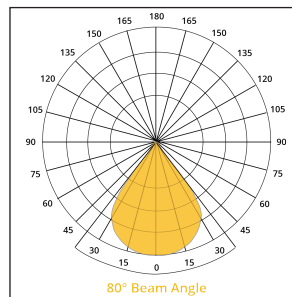

WIDE BEAM

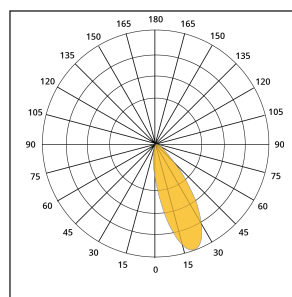

ASYMMETRIC BEAM

REFLECTORS:

SQUARE



WHITE



SILVER



BLACK



GOLD



RED



GUNMETAL