

## FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ Round diffusor is made from frosted PMMA polycarbonate.
- ✓ Suitable for surface and wall mounted installations.
- ✓ LED spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

**Sonic COR+**  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

### TYPE

- ☐ T1 - Type 1
- ☐ T2 - Type 2
- ☐ T3 - Type 3

### SOURCE

- ☐ 15W LED
- ☐ 20W LED
- ☐ 30W LED

### RADIANCE

- ☐ DI - Direct Indirect (85%DN/15%Up)
- \*Light Distribution.

### VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V\*

\*Not available for all configurations.

### DRIVER

- ☐ ST - Standard (Non-Dimming)
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐  \*

\*Please specify dimming method.

### MOUNTING

- ☐ WM - Wall Mount
- ☐ CM - Ceiling Mount

### LENS

- ☐ OP - Opal

### FINISH

- ☐ BK - Black
- ☐ WH - White

### CCT

- ☐ 30K - 3000Kelvin/90CRI
- ☐ 35K - 3500Kelvin/90CRI
- ☐ 40K - 4000Kelvin/90CRI

\*Other options are available.

## ACOUSTIC FINISH



## LUMEN OUTPUT:


Watts	30K	35K	40K
15W	1360 lm	1400 lm	1440 lm
20W	1850 lm	1900 lm	1950 lm
30W	2800 lm	2900 lm	3000 lm



Project:


Type:

SIZE:

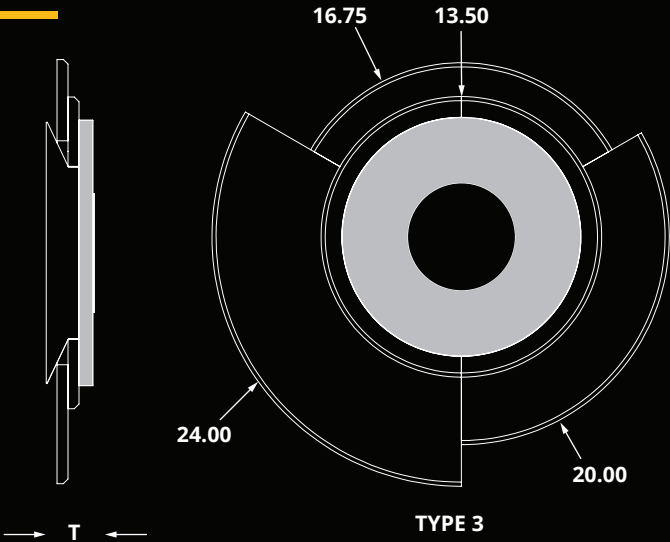


Type	Thickness (T)	Max. Diameter (D (Max.))	Min. Dimension (D (Min.))
Type 1	2.4 Inch	24.00 Inch	18.00 Inch
Type 2		24.00 Inch	15.75 Inch
Type 3		24.00 Inch	16.75 Inch


TYPE:

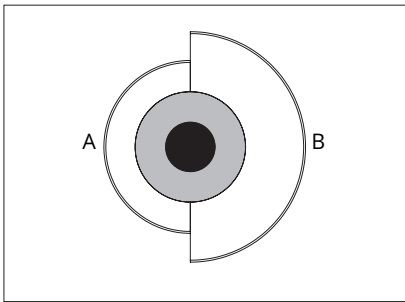

Type 1

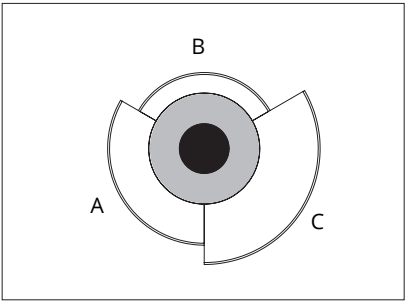

Type 2

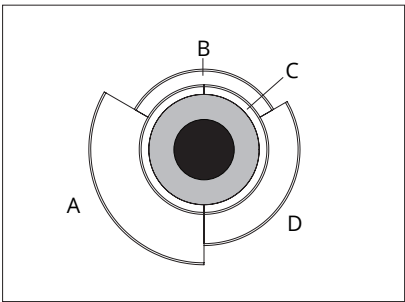


Type 3



A - 01 - Admiral Blue  
B - 11 - Dandelion Yellow



A - 11 - Dandelion Yellow  
B - 04 - Charcoal  
C - 01 - Admiral Blue

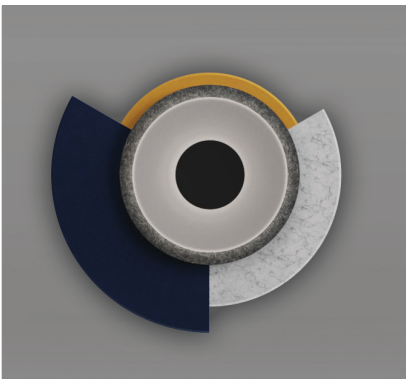

A - 01 - Admiral Blue  
B - 11 - Dandelion Yellow  
C - 04 - Charcoal  
D - 03 - Light Marble