


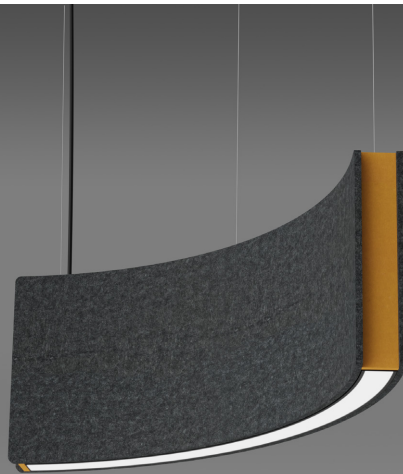

FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

Sonic CURVE+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ FC - Curved Edge
☐ FS - Square Edge

HEIGHT

- ☐ 12 in
☐ 16 in
☐ 24 in

SIZE

- ☐ 3 ft

SOURCE

- ☐ 20 W
☐ 30 W
☐ 40 W

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ CV - Constant Voltage (RGBW)
☐

Specify dimming protocol.

MOUNTING

- ☐ S6W - 6 ft Cord BK¹
☐ S6B - 6 ft Cord WH¹
☐ S ft²
 1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

ED CURVE FINISH

- ☐ BK - Black¹
☐ WH - White²
 1. RAL 9005
 2. RAL 9016


CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐

1. Available with CV.
 2. Available with DL2.
 Specify required CCT.

ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 04/11.

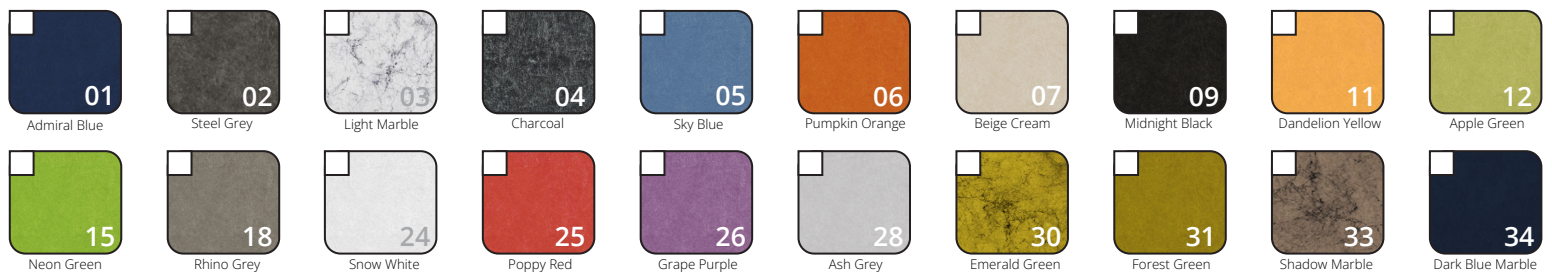

LUMEN OUTPUT:


Watts	30K	35K	40K
20 W	2070 lm	2125 lm	2180 lm
30 W	3065 lm	3150 lm	3235 lm
40 W	4086 lm	4200 lm	4313 lm




Project:

Type:


SIZE:

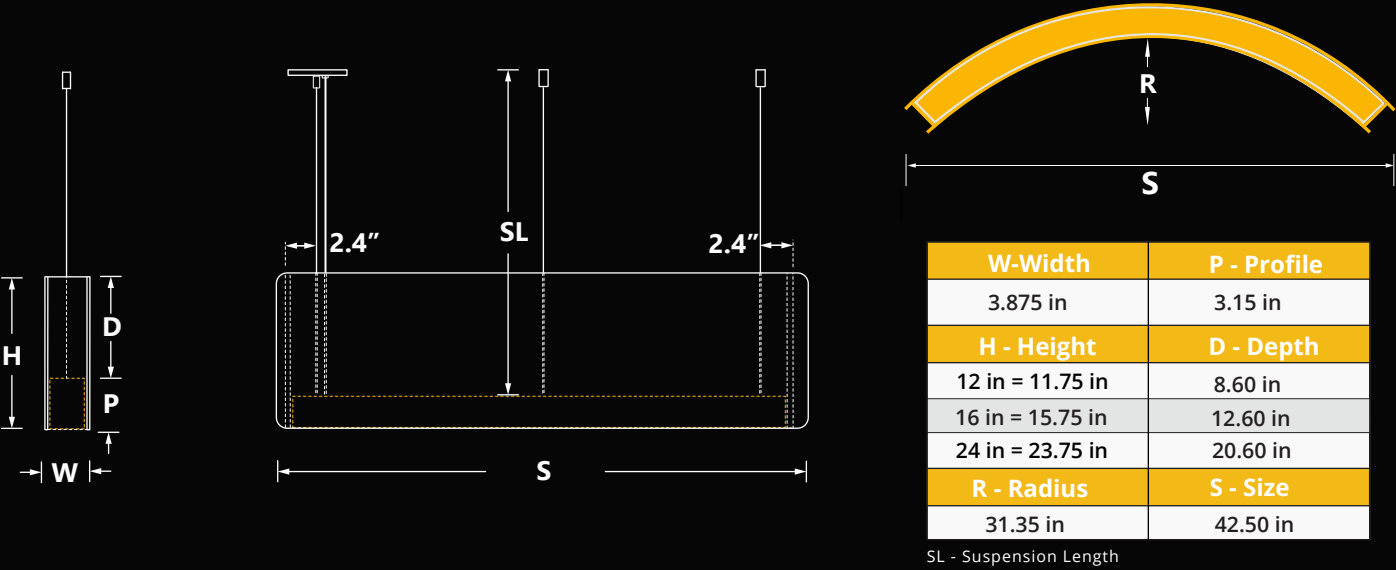


TYPE:




FC - Curved Edge



End Cap Detail




FS - Square Edge




End Cap Detail

FINISHES:

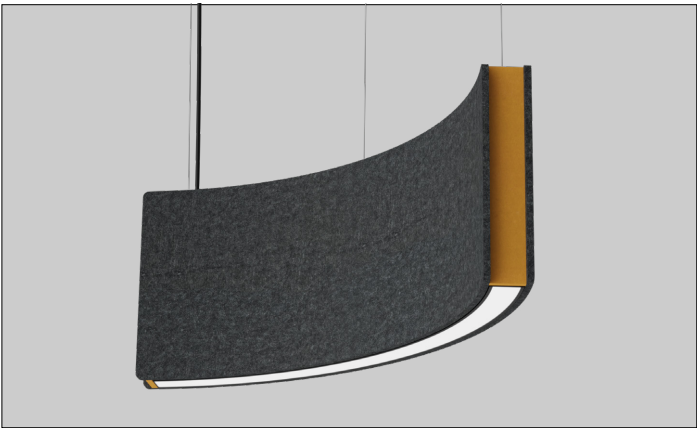

FC - 04/11

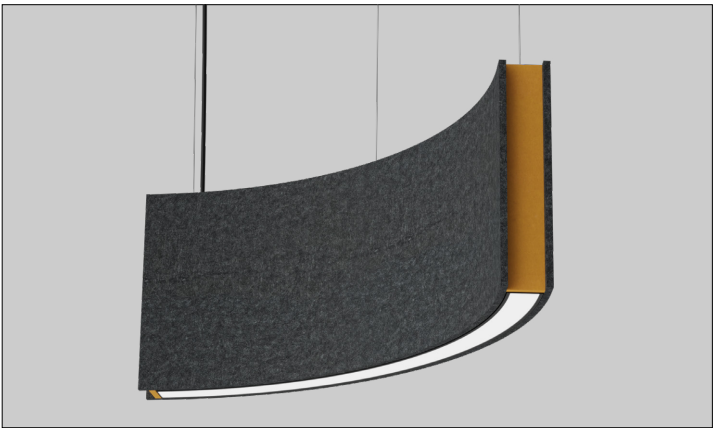

FS - 04/11